## INSTALLATION INSTRUCTIONS

## **LED WALL FIXTURE**

120VAC/60Hz Input

## READ AND FOLLOW SAFETY INFORMATON


**CAUTION** - Turn off the main power at the circuit breaker before installing and servicing the fixture to prevent possible injury from electric shock. All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections, obtain the services of a qualified electrician.

## **INSTALLATION & ASSEMBLEY**

- 1. Pull the power supply wires out from the outlet box (1). Attach the mounting backplate(2) to the outlet box using two mounting screws (3).
- 2. Make wire connections, connect the black supply wire (5) to black fixture wire (9), white supply wire (4) to white fixture wire(8) and the fixture ground wire(10) to supply ground wire(6) using wire nuts (7). Wrap all wire connections with electrical tape for secure connection.
- 3. Place the Back Plate (11) of the lamp over the mounting brackplate (2). Insert the fixture pan screws (12) and tighten to secure the lamp to the wall. Insert one G9 bulb (4W max).
- 4. Installation complete, restore power at the circuit breaker and turn light switch on to activate this fixture.

Care and maintenance – Use a clean, soft cloth to wipe the surface of the fixture.

DO NOT use any cleaners with chemicals, solvents or harsh abrasives Replacement-This LED product has no bulb to replace.

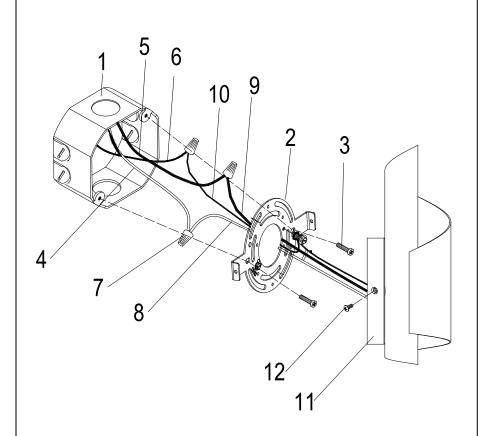

- 1. OUTLET BOX (NOT INCLUDED)
- 2. MOUNTING BRACKET
- 3. MOUNTING SCREW
- 4. WHITE SUPPLY WIRE
- 5. BLACK SUPPLY WIRE
- 6. SUPPLY GROUND WIRE

- 7. WIRE NUT
- 8. WHITE FIXTURE WIRE
- 9. BLACK FIXTURE WIRE
- 10. FIXTURE GROUND WIRE
- 11. BACK PLATE
- 12. SCREW