


sunlite®

INSTALLATION INSTRUCTIONS

32" Oval Double Band Trim Flush Mount Light Fixture | SCT

DIMMABLE 10-100%*



Please read and understand this entire manual before attempting to assemble, operate or install the product.

WARNINGS & CAUTIONS: Risk of fire or electric shock, avoid fire or electric shock. Turn off the power at fuse or circuit breaker box before installation and maintenance to avoid electric shock. Before installation thoroughly review enclosed installation manual. Use for 120 Volt fused circuits. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved. If you do not have sufficient electrical wiring experience, please consult a qualified electrician. Consult a qualified electrician to ensure correct branch circuit conductor. Do not make or alter any open holes in an enclosure of wiring or electrical components during installation. Suitable for surface mount. Indoor use only. Min 90°C supply conductors. If the product is damaged, do not attempt installation and do not use. Operating temperature -20°C - 40°C (-4°F - 104°F). Suitable for damp locations.

AVERTISSEMENT – Risque d'incendie ou de choc électrique. Ce produit doit être installé selon le code d'installation pertinent, par une personne qui connaît bien le produit et son fonctionnement ainsi que les risques inhérents. Consulter un électricien qualifié pour vous assurer que les conducteurs de la dérivation sont adéquats. Convient aux emplacements humides. Peut être utilisé à une température ambiante n'excédant pas 40°C. Les fils d'alimentation 90°C min. Cet appareil n'est pas destiné à être utilisé dans les issues de secours.

Retain these instructions for future reference.

v2025

HARDWARE INCLUDED:

Part	Description	Quantity
AA	Wire Nut	3
BB	Drywall Anchors	4
CC	30mm Wall Screws	4
DD	30mm Mounting Screws	4
EE	Mounting Bracket	1



AA




BB




CC



DD



EE

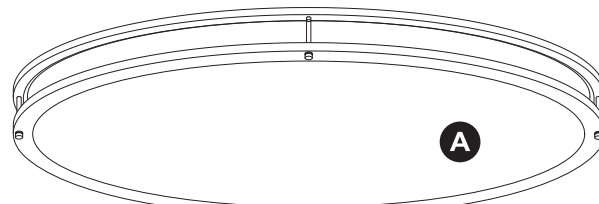

Installation & Assembly

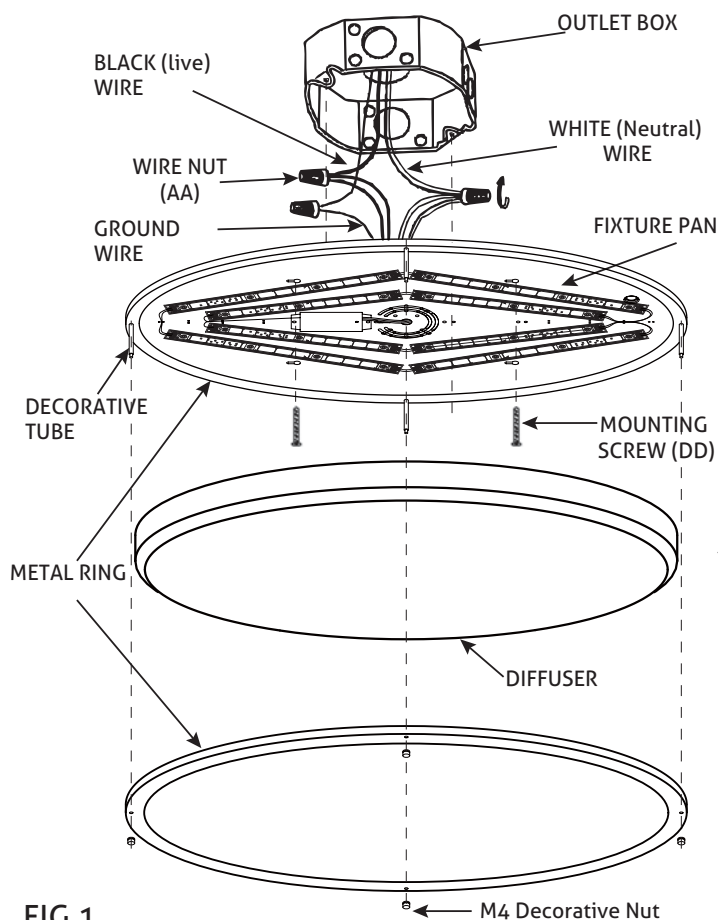


FIG.1

WARNING: Be sure the electricity to the wires you are working on is shut off. Either remove the fuse or turn the circuit off.

PRE-INSTALLATION:

- Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.
- Unscrew the caps, remove the cover and ring from the baseboard.

INSTALLATION AND ASSEMBLY

- Pull the Supply Wires and House Ground Wire out from the Outlet box.
- Thread the fixture Mounting Screws (DD) into the appropriate threaded holes of the outlet box.
- Connecting the Wires: use a WIRE CONNECTOR (BB) to connect the black fixture wire to the black supply wire (live wire) from the outlet box, and the white fixture wire to the white supply wire (neutral wire) from the outlet box.
- connect the fixture ground wire to the supply ground wire together (if ground wire is missing, secure to the green screw on the mounting bracket). Wrap all wire connections with electrical tape to ensure secure connection.
- Carefully tuck all wires back into the outlet box. Place the fixture pan over outlet box and feed fixture Mounting screws through keyhole slots. Rotate the fixture pan clockwise until fixture mounting screws slid into the narrow end of the keyhole slots and tighten firmly.
- The CCT tunable selector switch was built in the fixture. allows the user to choose between three white color temperatures ranging from 3000K to 5000K (**default 5000K**). Select desired CCT prior to closing the diffuser.
- Attached the DIFFUSER and Metal Ring to the Fixture pan, screw up.
- Installation complete, restore power at the circuit breaker and turn light switch on to activate this fixture.