

# INSTALLATION INSTRUCTIONS

## IMPORTANT SAFETY INFORMATION


- TURN POWER OFF AT THE MAIN POWER PANEL OR FUSE BOX BEFORE INSTALLING OR REPLACING THE FIXTURE AND/OR WHEN REPLACING THE BULBS.
- THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH ALL APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
- If you are not familiar with electrical wiring, it is recommended that you secure the services of a qualified electrician who can assure that this installation meets local, state, and national codes.
- The electrical system and the method of connecting this fixture to the system must be in accordance with local, state, and national electrical codes.
- This fixture is to be connected to a 120-Volt, 60 Hz power source.
- Connecting to a different power source may create a hazard and will void the warranty.
- Do not use near or around flammable/combustible materials or liquids.
- If it becomes necessary to replace the glass, only use a tempered safety glass of equal thickness.
- Do not attempt to open the fixture housing. There are no serviceable parts inside.
- All fixtures should be mounted to a grounded junction box.
- NOTE: Fixture is NOT dimmable.

1. Thread the 1/8" IPS HEX NUT onto the NIPPLE, and screw the NIPPLE into the center hole off MOUNTING BRACKET. Do not tighten the HEX NUT at this time.

2. Pull the power supply wires out from the OUTLET BOX, and mount the MOUNTING BRACKET to the OUTLET BOX, using MOUNTING SCREWS.

3. Feed the fixture wires through the provided hole on the FOAM PAD. Place the FOAMPAD inside the BACK PLATE of the fixture.

4. Make the following wiring connections using the provided WIRE NUTS WHITE SUPPLY WIRE TO WHITE FIXTURE WIRE, BLACK SUPPLY WIRE TO BLACK FIXTURE WIRE, SUPPLY GROUND WIRE TO FIXTURE GROUND WIRE.

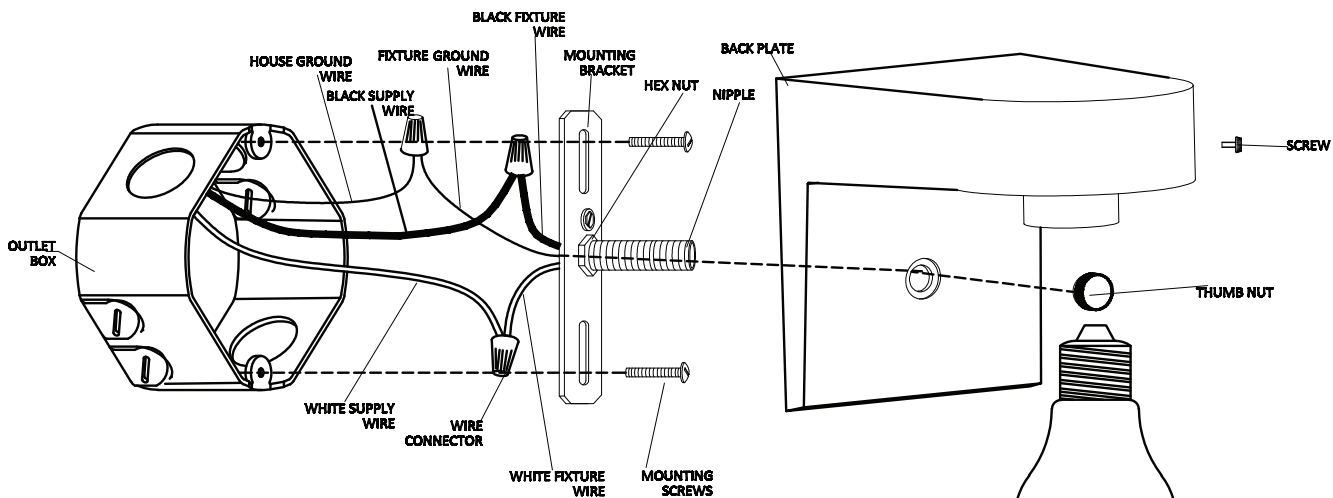

5. Place the BACK PLATE of the fixture over the OUTLET BOX and onto the NIPPLE, and adjust the NIPPLE until it protrudes out form the BACK PLATE 1/4". Remove the BACK PLATE and secure the position of the NIPPLE by tightening the HEX NUT against the MOUNTING BRACKET. Place the BACK PLATE back onto the NIPPLE, and secure into place using the THUMB NUT provided.

6. Loosen the screw on the glass holder. Then insert the glass shade all the way into the glass holder and finger tighten the screw to hold the glass shade.

