

Surface Mount LED EXIT Sign

05277-SU (JELEX1RC-8-CL) single-face and double-face edge lit

User Manual


sunlite®

1. CAUTION


- Do not use outdoors.
- Equipment should be mounted in locations and at heights where it will not readily be subjected to tampering by unauthorized personnel.
- Do not mount near gas or electric heaters.
- Cap unused wires with enclosed wire nuts or other approved method.
- The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition.
- Do not use this equipment for other than its intended use.
- Servicing of this equipment should be performed by qualified personnel.
- Disconnect AC power before servicing.
- Be careful with the battery if the acid is leaking. Battery acid can cause burns to skin and eyes. If acid is spilled on skin and eyes, flush acid with fresh water and contact a physician immediately.

CAUTION: Do not use the standby rating to determine the suitability of the branch circuit to which the equipment can properly be connected in accordance with the National Electrical Code, ANSI/NFPA 70.

2. INSTALLATION

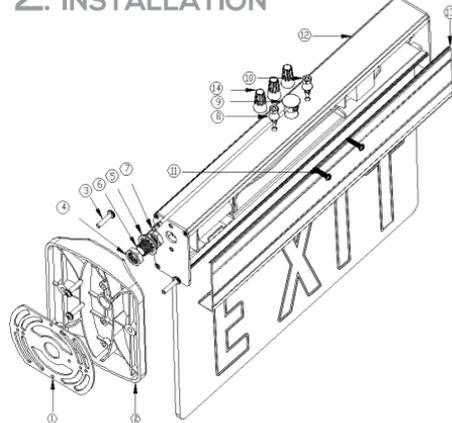

- ① Base plate
- ② Mounting bracket
- ③ Screw
- ④ Screw nut
- ⑤ Metal grommet
- ⑥ Screw tube
- ⑦ Ground wire terminal
- ⑧ Hole plug
- ⑨ Hole plug
- ⑩ Screw bolt
- ⑪ Self-tapping screw
- ⑫ Light body
- ⑬ Cover
- ⑭ Wire cap

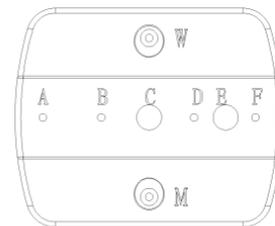

END MOUNT

1. Fix the base plate to the wall or junction box tightly.
2. Remove the fixing plate on the side of the light body and slide out the housing cover. Place the fixing plate back to the light.
3. Tighten the mounting bracket to the fixing plate with two screws through hole D & F.
4. Put the screw tube into the hole E and put wires through the screw tube.
5. Fasten the screw nut to the screw tube from the inner side of light.
6. Put the metal grommet and ground wire terminal through the screw tube successively and connect the wires to power.
7. Connect the wire attached to the battery.
8. Fix the mounting bracket to the light tightly with another screw nut and attach to the base plate with screws.
9. Replace the cover of the aluminum housing.



sunlite®

Tel: 718.768.7000

TOP MOUNT

1. Fix the base plate to the wall or junction box tightly.
2. Remove the fixing plate on the side of the light body and slide out the aluminum cover.
3. Remove the three hole plugs.
4. Put the screw tube into the middle hole on the top of the light body and put wires through the screw tube.
5. Fasten the screw nut to the screw tube from the inner side of light.
6. Put the metal grommet, ground wire terminal and the mounting bracket through the wires successively and connect the wires to power.
7. Connect the wire attached to the battery.
8. Fix the mounting bracket to the light tightly with another screw nut and attach to the base plate with screws.
9. Replace the cover of the aluminum housing.



BACK MOUNT

1. Fix the base plate to the wall or junction box tightly.
2. Remove the fixing plate on the side of the light body and slide out the housing cover.
3. Remove the three hole plugs.
4. Put the screw tube into the middle hole on the back of the light body and put wires through the screw tube.
5. Fasten the screw nut to the screw tube from the inner side of light.
6. Put the metal grommet, ground wire terminal and the mounting bracket through the wires successively and connect the wires to power.
7. Connect the wire which attached to the battery.
8. Fix the mounting bracket to the light tightly with another screw nut and attach to the base plate with screws.
9. Replace the cover of the aluminum housing.



3. OPERATION

1. During an electrical power failure, the exit light will automatically come on for a minimum of 90 minutes.
2. To test, press the "TEST" switch and the exit light will illuminate. When the switch is released, the light will go off.

Note: The battery in this product is probably not fully charged. The exit sign would take effect after charging for not less than 24 hours.

4. WARRANTY

sunlite warrants that this product is free from defects in materials and workmanship for two years from the day of purchase. If the product has been misused, damaged by accident or in any other way of improper use, this warranty becomes void.

Note: This sign shall be installed only where there is adequate color contrast between the sign legend and the interior wall finish behind the sign, to provide for sufficient visibility.