

INSTALLATION INSTRUCTIONS

49164-SU | LFX/SWP/30W/BRZ/50K | LED SLIM WALLPACK FIXTURE
49165-SU | LFX/SWP/50W/BRZ/50K | LED SLIM WALLPACK FIXTURE



WARNING: Read and understand these instructions before installing Fixture.
This fixture is intended for installation in accordance with National Electrical Code or Canadian Electrical Code (as applicable) and local regulations. To assure full compliance with local codes and regulations, check with your local electrical inspector before installation. To prevent electrical shock, turn off all electricity before proceeding. Retain these instructions for maintenance reference.



Introduction

An internal power-factor-corrected switch-mode supply allows it to be used from any nominal 100V-277V, 60Hz AC supply without any variation in light output.


Suitable for use in the following locations:
• Ambient Temp: -40~+40°C
• Wet Locations

Installation

Refer to the following diagram when you install the fixture. Three installation methods, directly fix to the mounting surface, mounting pole or mounting stand.


Surface Mounting

1

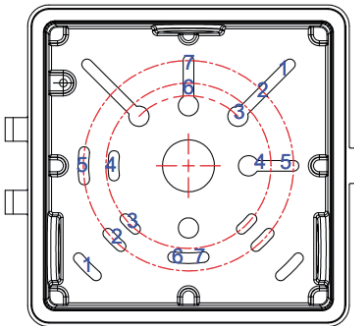


Check junction box size before removing the gasket.

2

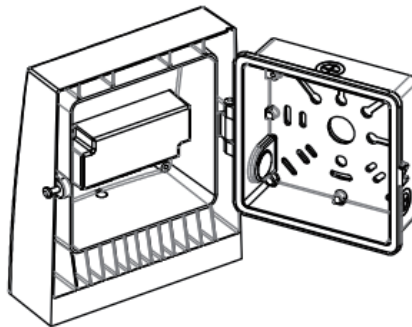


Open the box using Phillips screw driver. Refer to Wiring information below.

3

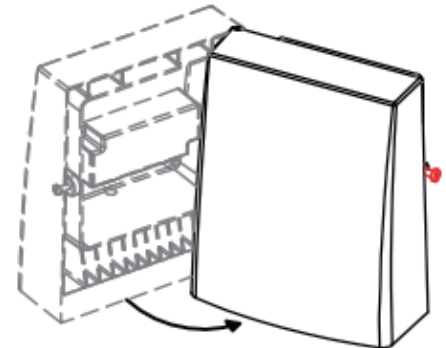


Tighten enclosure screw to seal fixture.

Wiring

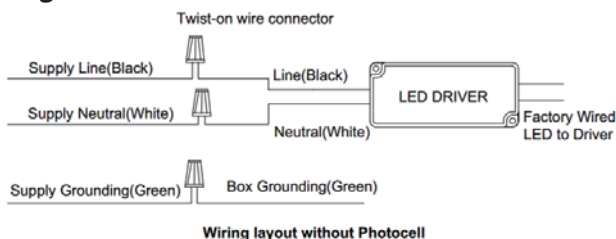


OR

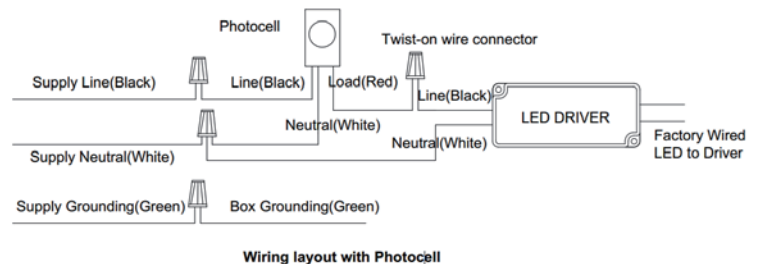

Determine if fixture is equip with or without photocell. Utilize twist-on connectors to make electrical connections. Fasten the wires by the provided cable tie.


Mounting Pole

1

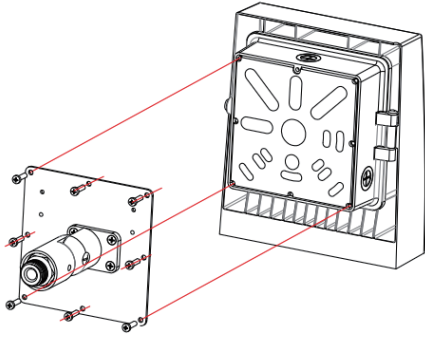


Screw the mounting pole to the black box.

2

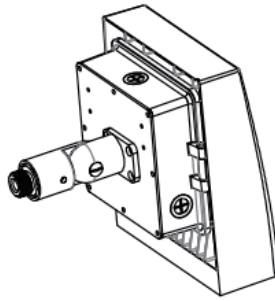

Remove the screw at the knuckle of the mounting pole. Pass the wire through the pole. Refer to wiring on page 1.


3

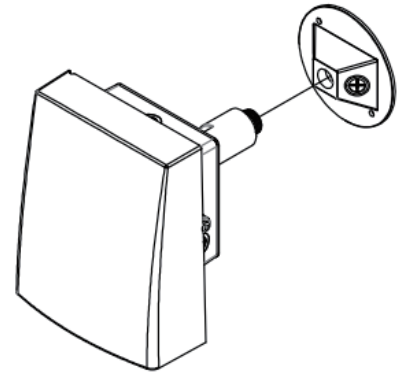

Secure cover plate to knuckle with locknut. Mount cover plate to junction box.


Mounting Stand

1

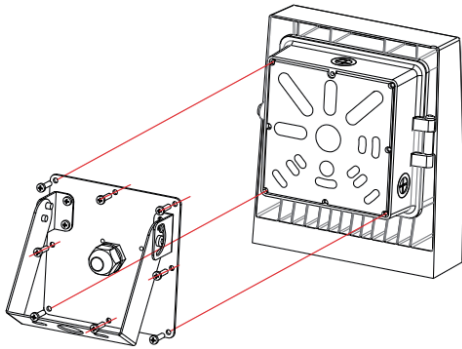


Screw the mounting stand on the black box.

2

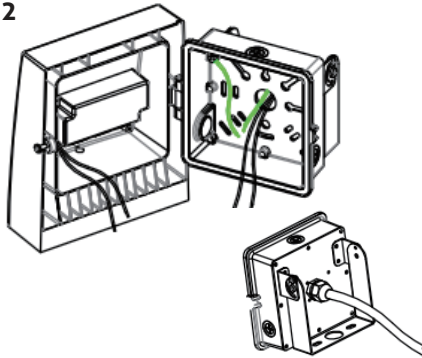


Open the black box. Put the wires into the black box from the strain relief. Twist the strain relief tightly. Refer to Wiring on page 1.

3

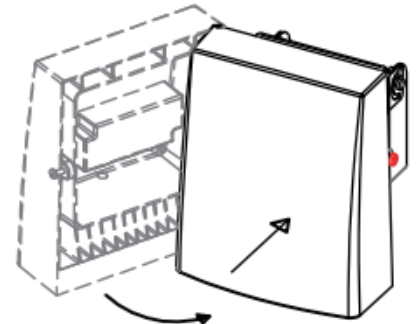


Lock the enclosure.

4

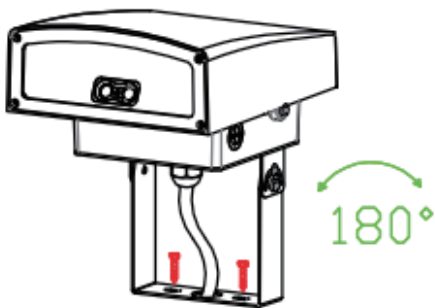

Mount the stand onto the mounting surface

5

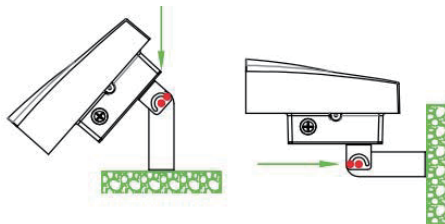

Direction of light can now be adjusted.

Sunshine Lighting Company

744 Clinton Street Brooklyn, NY 11231, USA

T. 718.768.7000

F. 718.768.0970

www.sunlite.com