sunlite®

INSTALLATION INSTRUCTIONS

LED MINI PANEL FIXTURES | 85671-SU, 85672-SU, 85674-SU

DIMMABLE 10-100%*

COLOR SELECTABLE SWITCH

2700K 3000K 3500K 4000K 5000K

Intertek


Please read and understand this entire manual before attempting to assemble, operate or install the product.


WARNINGS & CAUTIONS: Risk of fire or electric shock, avoid fire or electric shock. Turn off the power at fuse or circuit breaker box before installation and maintenance to avoid electric shock. Before installation thoroughly review encolsed installation manual. Use for 120 Volt fused circuits,This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved. If you do not have sufficient electrical wiring experience, please consult a qualified electrician. Consult a qualified electrician to ensure correct branch circuit conductor. Do not make or alter any open holes in an enclosure of wiring or electrical components during installation.If the product is damaged, do not attempt installation and do not use. Not for emergency lighting. Operating temperature -20°C - 40°C(-4°F - 104°F). Suitable for wet locations.

AVERTISSEMENT – Risque d'incendie ou de choc électrique. Ce produit doit etre installé selon le code d'installation pertinent, par une personne qui connait bien le produit et son fonctionnement ainsi que les risques inherents. Consulter un électricien qualifié pour vous assurer que les conducteurs de la dérivation sont adéquats. Convient aux emplacements humides. Peut être utilisé à une température ambiante n'excédant pas 40°C. Les fils d'alimentation 90°c min. Cet appareil n'est pas destiné à être utilisé dans les issues de secours.

Retain these instructions for future reference.


v2024

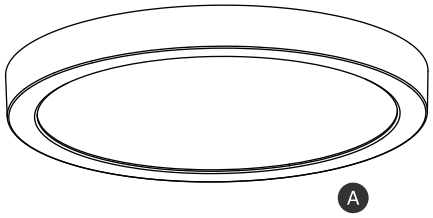

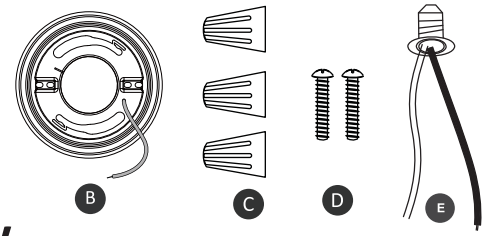

Part	Item Name
A	LED MINI PANEL FIXTURE
B	MOUNTING BRAKCET
C	WIRE NUTS
D	MOUNTING SCREWS
E	E26 LMAP HOLDER

Installation & Assembley

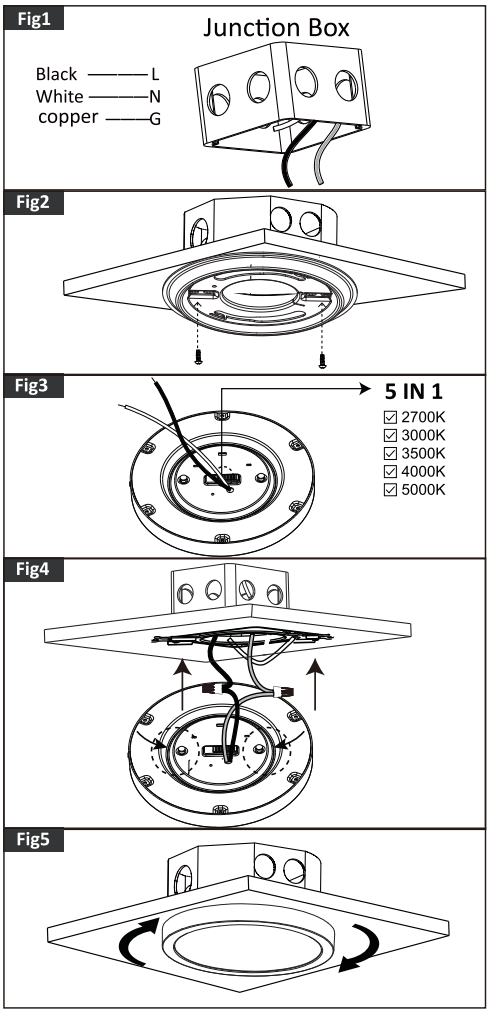

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

1. Make sure power is OFF and the J-BOX is securely mounted before installing the fixture,This fixture is compatible with 2.75" and 3.5" Junction box. (Fig 1)
2. Refer to the hole position on the bracket and do the matching to J-BOX. Attached them with screws. (Fig 2)
3. This fixture allows the correlated color temperature (CCT) of the LEDs to be adjusted from warm white (2700K) to cool white (5000K) as desired. Before proceeding to the next step, the CCT switch should be set to the desired positions by moving the toggle switch through the range of detents or clicks and following the position markings next to each switch. (Fig.3)
4. Connect supply wires to wires on fixture / bracket with wire nuts, Attached white to white, Black to Black, and copper wire to Green wire as grounding connection. (Fig.4)
5. Make sure all wires are carefully tucked inside the junction box.Align the 2 screw points on fixture to the wider side of long holes on the bracket, twist in clockwise direction until fixing stable. (Fig 5)
6. Restore power at the source. check the fixture can work well.

Sunshine Lighting Company 744 Clinton Street Brooklyn, NY 11231, USA • **T.** 718.768.7000 • **F.** 718.768.0970 • www.sunlite.com