


# 50150-SU

**sunlite**

LFX/FCM16/30W/AL/SCT

0

Project: \_\_\_\_\_  
Type: \_\_\_\_\_  
Catalog #: \_\_\_\_\_  
Date: \_\_\_\_\_  
Comments: \_\_\_\_\_

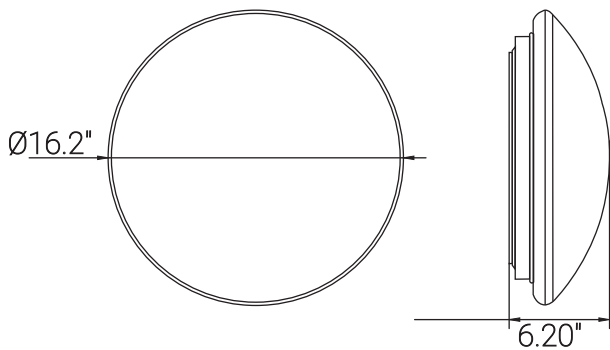

## Technical Specifications

### Photometrics

Lumen	2800
Emitted Color	CCT Selectable
Color Temp	27K/30K/40K/50K/65K
Color Rendering Index (CRI)	80
Beam Angle	120°
Lifespan	50000

### Electrical

Watt	30
Input Voltage	120
Power Factor	0.98
Dimmable	Forward Phase (Triac or Incandescent)

### Ratings / Certifications

Safety Certification	ETL - Damp Location
Energy Star Certified	False
Operating Temperature	-4°F~113°F
Warranty	5 Years

### Construction

Fixture Material	
Fixture Finish	
Lens Material	Glass
Lens Finish	Alabaster
Shape	Round
Mounting	Indoor