

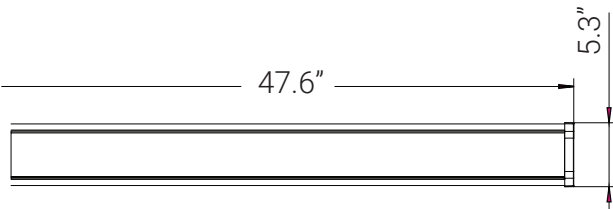


85298-SU



LFX/WA5/4'/3MW/3SCT

Linear Strip Light Wraparound Light Fixture, Power Selectable 32W/40W/48W, 5568 Lumens, Color Selectable 35K/40K/50K, Dimmable, 120 Degree Beam Angle, 120-277V, UL Listed

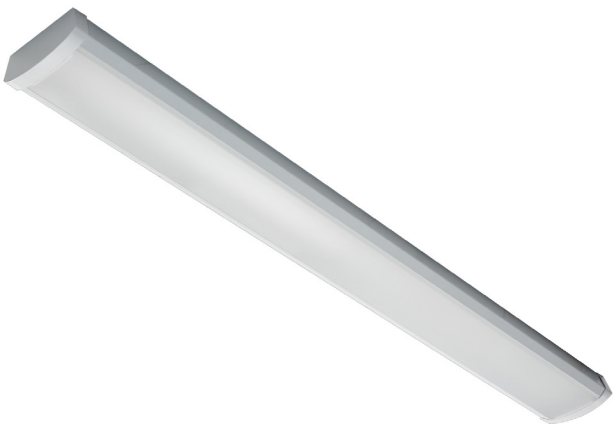

Project: _____
Type: _____
Catalog #: _____
Date: _____
Comments: _____

Technical Specifications

Photometrics

Lumen	3680/4600/5520
Emitted Color	CCT Selectable
Color Temp	35K/40K/50K
Color Rendering Index (CRI)	80
Beam Spread	110°
Lifespan	50000

Electrical

Watt	32/40/48
Input Voltage	120-277
Power Factor	
Dimmable	0-10V Low Voltage

Ratings / Certifications

Safety Certification	UL Listed - Damp Location
DLC	S-S6PBZO
Operating Temperature	-4°F - 122°F
Warranty	5 Years

Construction

Fixture Material	Steel
Fixture Finish	White
Lens Material	PMMA
Lens Finish	White
Shape	Linear
Mounting	Surface