


# 85608-SU



LFX/GDL/2L/3.5R/24W/90CRI/5SCT

2 Light Regressed Round Gimbal Downlight 90CRI 120V Dimmable Energy Star 27K-50K White

Project: \_\_\_\_\_  
Type: \_\_\_\_\_  
Catalog #: \_\_\_\_\_  
Date: \_\_\_\_\_  
Comments: \_\_\_\_\_

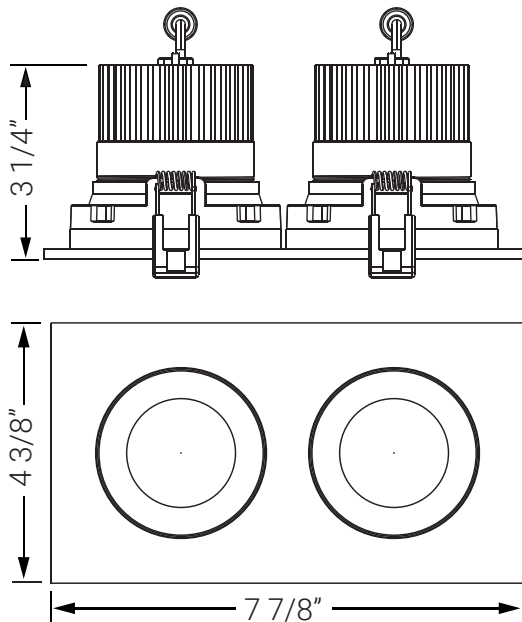

## Technical Specifications

### Photometrics

Lumen	1540
Emitted Color	CCT Selectable
Color Temp	27K/30K/35K/40K/50K
Color Rendering Index (CRI)	90
Beam Spread	38°
Lifespan	5

### Electrical

Watt	12
Input Voltage	120
Power Factor	0.9
Dimmable	Forward Phase (Triac or Incandescent)

### Ratings / Certifications

Safety Certification	ETL Listed - Wet Location
Operating Temperature	-4°F - 104°F
Warranty	5 Years

### Construction

Fixture Material	Metal
Fixture Finish	White
Lens Material	Polycarbonate
Lens Finish	Clear
Shape	Round

