


# 85640-SU

**sunlite**

SF/BLI/FP/14/MW/83S/MV/WH/2PK

1x4 Backlit Lay-In Flat Panel, Wattage and CCT Selectable

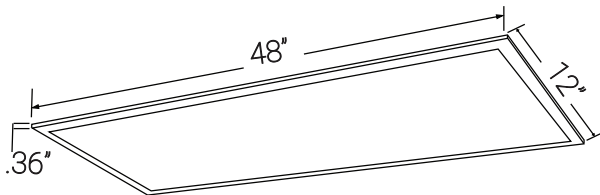

Project: \_\_\_\_\_  
Type: \_\_\_\_\_  
Catalog #: \_\_\_\_\_  
Date: \_\_\_\_\_  
Comments: \_\_\_\_\_

## Technical Specifications

### Photometrics

Lumen	2500/3750/5000
Emitted Color	CCT Selectable
Color Temp	35K/40K/50K
Color Rendering Index (CRI)	80+
Beam Spread	120°
Lifespan	50000

### Electrical

Watt	20/30/40
Input Voltage	120-277
Power Factor	0.9
Dimmable	0-10V Low Voltage

### Ratings / Certifications

Safety Certification	UL Listed - Damp Location
DLC	Pending
Operating Temperature	-4°F - 104°F
Warranty	5 Years

### Construction

Fixture Material	Steel, Aluminum & PMMA
Fixture Finish	White
Lens Material	PMMA
Lens Finish	Diffuse
Shape	1X4
Mounting	Recessed