


87811-SU



LFX/CRD/9.5R/90CRI/3MW/5SCT/V2

9.5" Round Commercial Recessed Downlight 20W/30W/40W
27K-50K 0-10V Dimmable 120-347V Energy Star

Project: _____
Type: _____
Catalog #: _____
Date: _____
Comments: _____

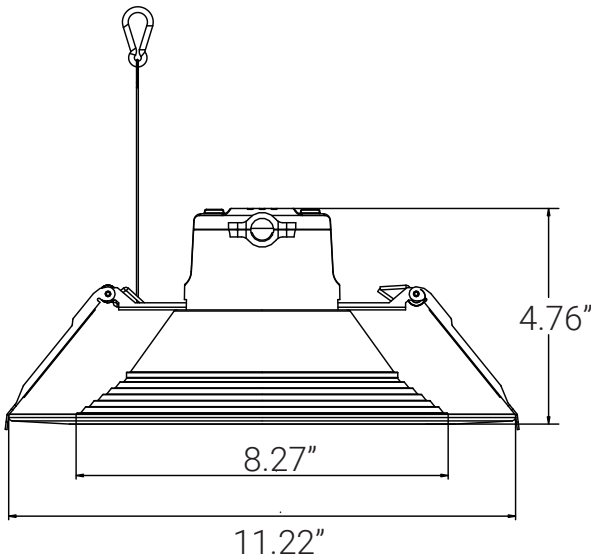

Technical Specifications

Photometrics

Lumen	2500/3750/5000
Emitted Color	CCT Selectable
Color Temp	27K/30K/35K/40K/50K
Color Rendering Index (CRI)	90
Beam Spread	90°
Lifespan	5

Electrical

Watt	20/30/40
Input Voltage	120-347
Power Factor	0.9
Dimmable	0-10V Low Voltage

Ratings / Certifications

Safety Certification	ETL - Damp Location
Operating Temperature	-4°F - 104°F
Warranty	5 Years

Construction

Fixture Material	Aluminum
Fixture Finish	White
Lens Material	Plastic
Lens Finish	White
Shape	Round