


Sunlite Color Temperature Selectable LED Light Engine, 4-Inch, 17 Watts (80W=), 1050 Lumens, 27K/30K/40K/50K CCT, Dimmable, 25,000 Hour Life Span, UL Listed, 90 CRI

DESCRIPTION:

Sunlite's LED Color Temperature Selectable LED Light Engines allow you to convert your existing light fixtures into state-of-the-art LED fixtures. These dimmable panels feature innovative technology that allows you to choose from five different color temperatures. Select warm whites (2700K or 3000K), cool white (4000K), daylight (5000K) depending on your preference using a switch located on the front. Up to 1050 bright lumen output equivalent to 80-watt light while only using 17 watts of electricity. Take advantage of their high lumen output and energy saving LEDs while producing an even light spread. LED light engines are suitable for most ceiling fixtures including ceiling fans. They are also ideal for replacing dim or non-functioning LED panels in ceiling fixtures and ceiling fans. As these are universal light engines designed to work with a wide variety of fixtures there may be some small modifications and wire splicing required to install. ETL Listed for damp location use. High color rendering index of 90 (CRI). Measures 4.4 in Diameter X 0.78 in High.

FEATURES:

- **UPGRADE TO LED** - Keep your existing decorative fixtures and upgrade to energy efficient LED technology. Simple wiring for easy installation. These LED modules can be mounted with center threaded screw type fixtures or directly to flat fixture bases with mounting screws. Commercial grade with a heavy-duty metal base. Can also be used to replace fluorescent Circline bulbs. (Ballast bypass required)
- **COLOR SELECTABLE** - These dimmable panels feature innovative technology that allows you to choose from five different color temperatures. Select warm whites (2700K or 3000K), cool white (4000K) or daylight (5000K) depending on your preference using a switch located on the front. Up to 1050 bright lumen output equivalent to a 80 watt light while only using 17 watts of electricity.
- **DIMMABLE** - These LED retrofit panels can be dimmed when installed with a Triac Compatible Dimmer. Tested compatible dimmers include Lutron: DV-600P, DVELV-300, SELV-300. Leviton: IPL-06
- **ETL LISTED** - ETL Listed for damp location use. High color rendering index of 90 (CRI). Measures 4.4 in Diameter X 0.78 in High.
- **LONG LIFE SPAN** – Built to last with a 25,000-hour lifespan, reducing the need for frequent replacements and ensuring maintenance-free performance.

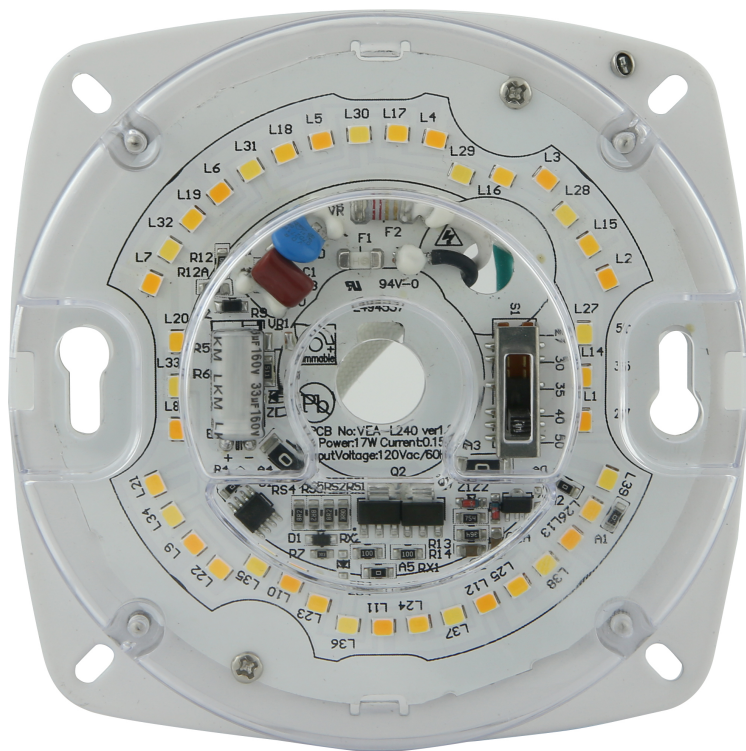

SPECIFICATIONS:

General Characteristics

Average Rated Hours	25000
Finish	Clear
Average Life Span Years	23
Dimmable	Yes
Dimming Type	Forward Phase (Triac or Incandescent)
Dimming Percentage	5-100%
Material	Metal & Plastic
Lens Finish	Clear
Bulb Type	Integrated
Replaceable LED Module	Yes

Electrical Characteristics

Watts	17
Volts	120
LED Chip Manufacturer	2835
Power Factor	0.9
Temperature	0°F to 104°F

Light Characteristics

Lumens Brightness	850/900/1050
Color Rendering Index CRI	90
Emitted Color	CCT Selectable
Color Temperature Kelvin	27K/30K/35K/40K/50K
Beam Angle	180°
Flicker	<30%

Fixture Characteristics

Shape	Square
Number of Lights	1
Mounting	Other
Fixture Technology	LED
Use Location	Indoor

Additional Features

Safety Rating Mark	UL Classified
Safety Rated For Canada	Yes
Safety Rated For USA	Yes
Mercury Free	Yes

Product Dimensions

Size	4"
Item Dimension (in)	(W) 4.4 (H) 0.78 (D) 4.4
Package Dimension (in)	(W) 5.3 (H) 1 (D) 4.8
Package Weight (lb)	0.65

Product Data

Case Unit Rate	20
Item UPC	653703884769
Warranty Years	5

