


# 85662-SU



SF/ST/LN/48/MW/85S/MV/WH/BLS/EM

48" Linear Strip Light, Selectable CCT And Wattage With Bi-Level Sensor/EM Back-Up (Assy.)

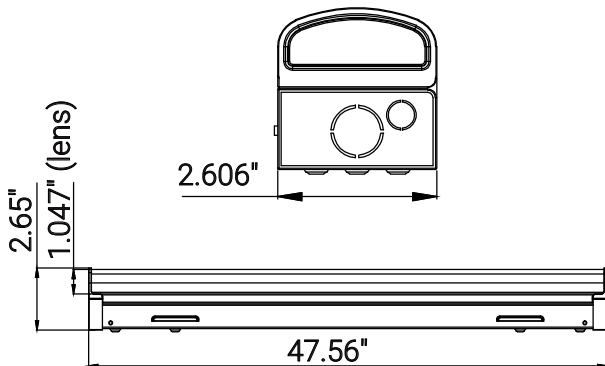

Project: \_\_\_\_\_  
Type: \_\_\_\_\_  
Catalog #: \_\_\_\_\_  
Date: \_\_\_\_\_  
Comments: \_\_\_\_\_

## Technical Specifications

### Photometrics

Lumen	3877/4702/5287
Emitted Color	CCT Selectable
Color Temp	30K/35K/40K/50K/65K
Color Rendering Index (CRI)	80
Beam Spread	140°
Lifespan	50000

### Electrical

Watt	28/35/40
Input Voltage	120-277
Power Factor	0.9
Dimmable	0-10V Low Voltage

### Ratings / Certifications

Safety Certification	ETL - Damp Location
DLC	
Operating Temperature	-4°F - 122°F
Warranty	5 Years

### Construction

Fixture Material	Steel
Fixture Finish	White
Lens Material	Polycarbonate
Lens Finish	White
Shape	Linear
Mounting	Surface

