

LED Rotatable Wall Pack With Photocell Wattage & CCT Selectable

sunlite

Selectable Wattage
100/120/150/185 W

SUPER BRIGHT
14500/17400/21800/26800 LM

Selectable Color
30K/40K/50K

2 Lights Roatable
15° - 210°


IP65
Wet Location Rated

97096-SU

- 40/50/60/80 Watts
- 6000/7500/9000/12000 Lumens
- 30K/40K/50K
- Dimmable
- Die-Cast Aluminum Body
- Black Finish
- Polycarbonate Lens
- Built-in Photocell
- 80 CRI
- 120-277V



15° to 210° Roatable

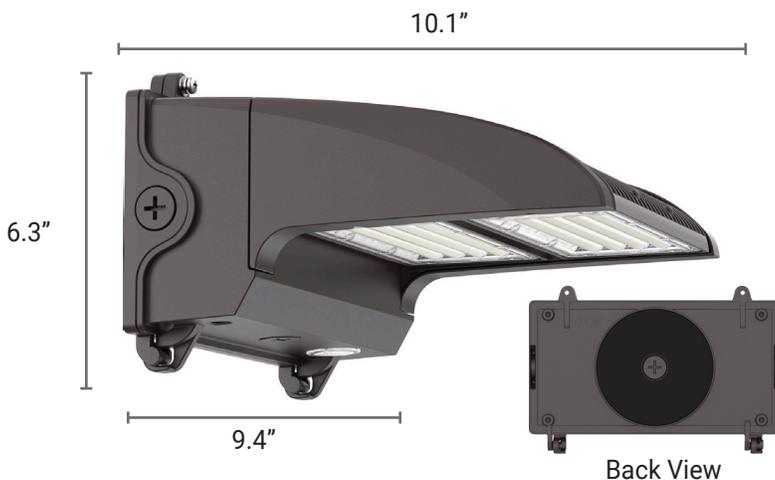

Wattage Selectable
Photocell
On/Off Switch
CCT Selectable



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
97096-SU	LFX/RWP/MW/3SCT/PC/G2	40/50/60/80W	6000/7500/9000/12000	30K/40K/50K	50000	WL,DIM,DLC	10.1(h) 19.29(w) 4.81(d)

DIM = Dimmable **WL** = Rated Wet Location **DLC** = Design Lights Consortium