


85686-SU



SF/BLI/FP/24/MW/85S/MV/WH/4PK

2x4 Backlit Lay-In Flat Panel, Wattage(30-40-50-60-72W) and CCT Select...

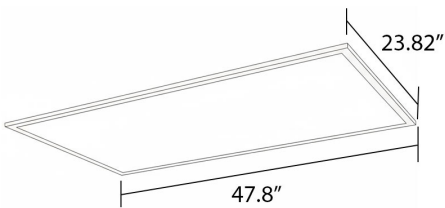

Project: _____
Type: _____
Catalog #: _____
Date: _____
Comments: _____

Technical Specifications

Photometrics

Lumen	3900/5200/6500/7800/9360
Emitted Color	CCT Selectable
Color Temp	30K/35K/40K/50K/65K
Color Rendering Index (CRI)	80+
Beam Spread	120°
Lifespan	50,000 Hours

Electrical

Watt	30/40/50/60/72W
Input Voltage	100-277V
Power Factor	0.9
Dimmable	Yes

Ratings / Certifications

Safety Certification	ETL - Damp Location
DLC	Yes
DLC Classification	Premium
DLC Model	BPL5-24-72W-L-H
DLC Product ID	S-P55N92 / S-PKYS8V
Operating Temperature	-4°F - 104°F
Warranty	5 Years
IC Rated	No

Construction

Fixture Material	Steel, Aluminum & Pmma
Fixture Finish	White
Lens Material	Pmma
Lens Finish	Diffuse
Shape	Rectangle
Mounting	Recessed
Use Location	Indoor