


85681-SU



LFX/FL/MMW/SCT/PC/G3

Flood Light Fixture 40W/50/60W/80W 120-277V 0-10V
Dimming 30K/40K/50K Photocell

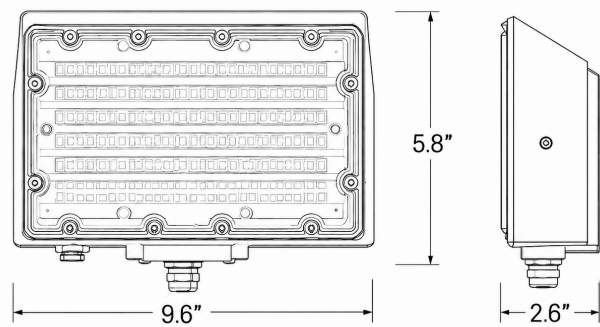

Add Ons



Knuckle Mount Bracket
85682-SU



Trunion Bracket
85683-SU

Project: _____
Type: _____
Catalog #: _____
Date: _____
Comments: _____

Technical Specifications

Photometrics

Lumen	12000
Emitted Color	CCT Selectable
Color Temp	30K/40K/50K
Color Rendering Index (CRI)	80
Beam Spread	7H6V
Lifespan	50000

Electrical

Watt	80W/60W/50W/40W
Input Voltage	100-277
Power Factor	≥0.90
Dimmable	0-10V

Ratings / Certifications

Safety Certification	UL -Wet Location
Operating Temperature	-40°F to 113°F
Warranty	5 Years

Construction

Fixture Material	Die-Cast Magnesium
Fixture Finish	Bronze
Lens Material	PC
Lens Finish	Clear
Cord Length	15.75"
Mounting	OT - Other
Usage	Outdoor