


# 87732-SU



LFX/CRD/SCT/6R/MW/D

6" Commercial Remod Downlight

Project: \_\_\_\_\_  
Type: \_\_\_\_\_  
Catalog #: \_\_\_\_\_  
Date: \_\_\_\_\_  
Comments: \_\_\_\_\_

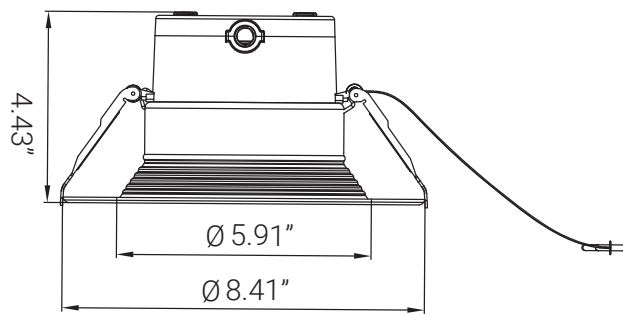

## Technical Specifications

### Photometrics

Lumen	750/1050/1500
Emitted Color	CCT Selectable
Color Temp	30K/35K/40K
Color Rendering Index (CRI)	90
Beam Spread	100°
Lifespan	5

### Electrical

Watt	9W/13W/19W
Input Voltage	120-277
Power Factor	0.9
Dimmable	TRUE0-10V Low Voltage

### Ratings / Certifications

Safety Certification	ETL Listed - Wet Location
Operating Temperature	-40~40°
Warranty	5 Years

### Construction

Fixture Material	Aluminum & PC
Fixture Finish	White
Lens Material	Polycarbonate
Lens Finish	White
Shape	Round

