


INSTALLATION INSTRUCTIONS

FOR CEILING MOUNT DOME FIXTURES

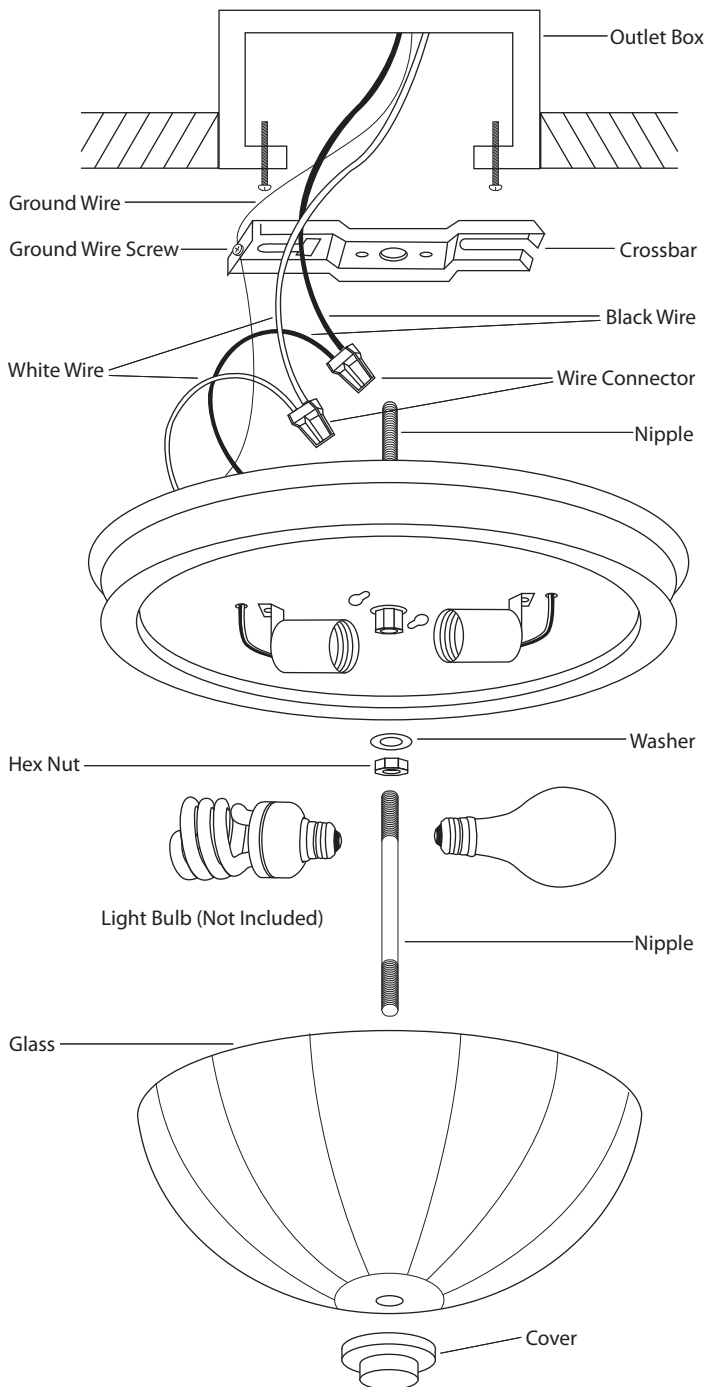

READ INSTRUCTIONS AND REVIEW ALL DIAGRAMS BEFORE INSTALLING FIXTURE

GENERAL INSTRUCTIONS:

1. All electrical connections must be in accordance with local codes, ordinances and the National Electric Code.
2. The fixture should be mounted on an electrical outlet box. The box must be directly supported by the building structures.
- 3: Turn off the circuit breaker or remove the appropriate fuse to disconnect power source before installing fixture.

TO INSTALL:

1. If you are replacing an existing fixture, disconnect and remove the old fixture. Expose the supply wiring from the outlet box.
2. Secure crossbar to junction box with included screws. Screw fixture mounting screws onto crossbar. See diagram to the left.

ELECTRICAL CONNECTION:

Connect the white wire(s) from the fixture to the white wire in the supply circuit. Connect the black wire(s) from the fixture to the black wire in the supply circuit.

Use CSA and UL listed wire connectors suitable for the size, type and number of conductors. Make sure there are no loose strands or wires. Secure wires with CSA and UL listed electrical tape. Connect both the ground wire from the fixture and the ground wire in the supply circuit to the ground terminal of the crossbar or back plate. Push wires up into junction box.

Push fixture up so mounting screws go through keyholes in fixture and twist secure. Tighten screws.

TO ASSEMBLE:

1. Screw hexnut onto included nipple, then screw the nipple into center of the fixture and secure by tightening with nipple.
2. Install light bulbs (not included).
3. Secure glass by pushing nipple through center hole, then screw on the included threaded nut and cover
4. Turn power on and make sure the light fixture is working properly.