

Bi-Pin

Sunlite 40621-SU Q35/GY6/120V Halogen 20-Watt Single Ended T3.5 Lght Bulb, 315 Lumen, 120 Volt, GY6.35 (Bi-Pin) Base, Clear, 2000 Hour Life Span, 3200K - Warm White 12 Pack


Single Ended T3.5

DESCRIPTION:

Sunlite Halogen Bulbs put out more lumens per watt (LPW) than standard incandescent bulbs. These 35-watt, 120-volt lamps feature a GY6.35 bi-pin base. Perfect for both indoor and outdoor applications. Use in chandeliers, track lighting, pendants, portable lamps, wall sconces, showcase displays, landscape lighting, and more. Convenient 12-pack.

FEATURES:

- **HALOGEN LAMPS** - These UV protected 35-watt 120-volt halogen bulbs produce more lumens per watt (LPW) than standard incandescent bulbs.
- **GY6.35 BASE** - These clear lamps feature a GY6.35 (bi-pin) base that works with a variety of applications. Each bulb measures 0.564 inches in diameter and 1.75 inches in overall height.
- **LONG LIFE** - With a 2000 hour life span these bulbs will last 1.8 years (based on 3 hours per day use).
- **DIMMABLE** - Fully dimmable when installed in a fixture with dimming control. Bright white, 315 lumen output.
- **INDOOR AND OUTDOOR USE** - These bulbs are perfect for both indoor and outdoor applications. Use in chandeliers, track lighting, pendants, portable lamps, wall sconces, showcase displays, outdoor lighting, and more.

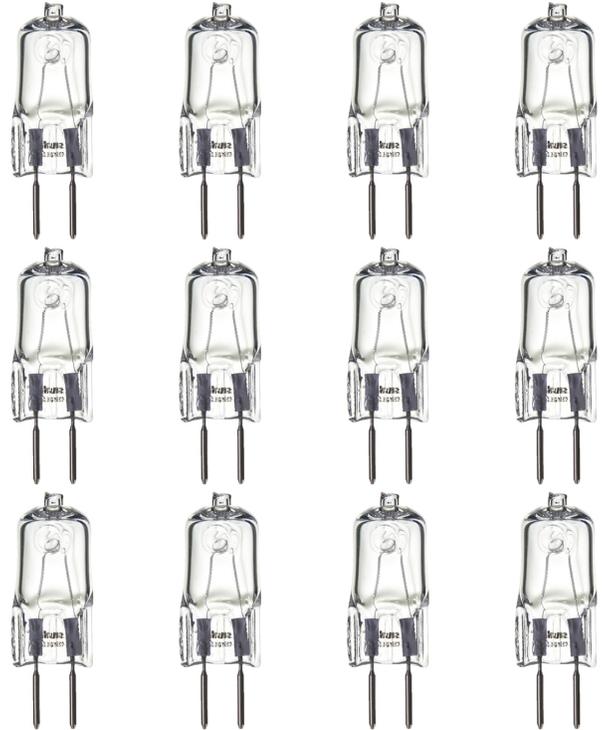

SPECIFICATIONS:

General Characteristics

Bulb Shape	Bi-Pin
Average Rated Hours	2000
Finish	Clear
Base	2-Pin Glass (GY6.35)
Average Life Span Years	2

Electrical Characteristics

Watts	35
Volts	120

Light Characteristics

Lumens Brightness	315
Color Rendering Index CRI	100
Emitted Color	Bright White
Color Temperature Kelvin	3200K

Additional Features

Title 20	Lawful for sale in California
-----------------	-------------------------------

Product Dimensions

MOL (in)	1.75
Diameter (in)	0.564"
Package Dimension (in)	(W) 3.25 (H) 2.88 (D) 3.88
Package Weight (lb)	0.260

Product Data

Case Unit Rate	20
Pack Size	12
Item UPC	653703406213
Package Type	Box



DIMMABLE