


Field Adjustable Wrap Light Fixture



Power and CCT Selectable Wrap Light

Sunlite's Field Adjustable Wrap Light offers three lumen output and white color options. Adjustments made via sliding switches located on the fixture housing.

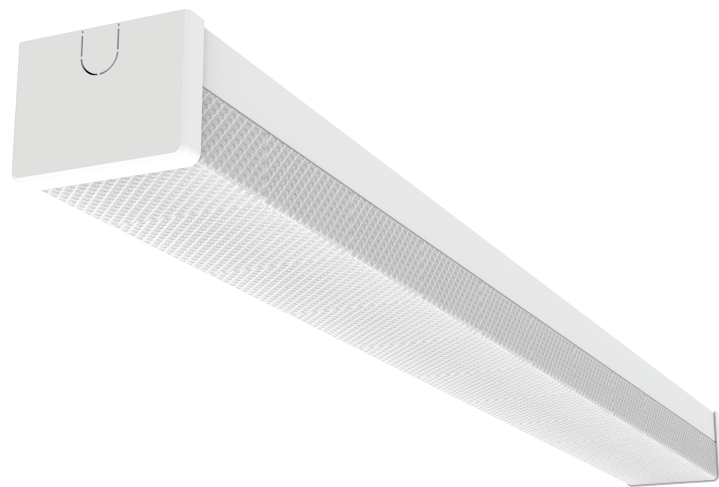

Features

- Field adjustable Wattage and CCT on all models
- Multiple mounting options
- Battery backup and/or bi-level motion sensor options
- 0-10V dimmable 10-100%
- Suitable for Stairwells, Schools, Parking Garages, Hospitals

Project: _____
Type: _____
Catalog #: _____
Date: _____
Comments: _____

Technical Specifications

Construction

Fixture Material	Steel
Fixture Finish	White
Lens Material	Polystyrene
Lens Finish	Prismatic
Shape	Linear

Electrical

Input Voltage	120-277Vac
Operating Frequency	60Hz
Power Factor	>0.9
Dimmable	0-10V / 10-100%

Photometrics

Color Rendering Index (CRI)	90
Beam Spread	110°
Lifespan (L70)	50,000 hours

Ratings / Certifications

Safety Certification	ETL
Safety Rating	Damp Location
Operating Temperature	-4°F - 122°F (-20°C - 50°C)
DLC	Standard 5.1
FCC	FCC Part 15, Subpart B
Warranty	5 years



Ordering Matrix *(fixture)*

Brand	Family	Shape	Size	Wattage	CCT	Voltage	Finish	Options
SF	WR4	LN		MW	3S	MV	WH	
	WR4 4" Wide Wraparound	LN Linear	24 24in 36 36in 48 48in	MW ¹ Wattage Selectable	3S CCT Selectable 30K/40K/50K 90CRI	MV 120-277V	WH White	EM Battery Backup BLS Bi-level Sensor BLS/EM Bi-level Sensor /Battery Backup

¹24" - 10/15/18W 48" - 18/25/30W 96" - 20/28/36W

Performance Data

SF/WR4/LN/24/MW/93S/MV/WH (2 Ft) @120V

10W	3000K	4000K	5000K	15W	3000K	4000K	5000K	18W	3000K	4000K	5000K
Lumens	1242	1273	1285	Lumens	1755	1804	1801	Lumens	2182	2251	2228
Lm/W	124	127	128	Lm/W	117	120	120	Lm/W	121	125	124

SF/WR4/LN/36/MW/93S/MV/WH (3 Ft) @120V

18W	3000K	4000K	5000K	25W	3000K	4000K	5000K	30W	3000K	4000K	5000K
Lumens	2223	2327	2396	Lumens	2944	3099	3157	Lumens	3476	3670	3720
Lm/W	123	129	133	Lm/W	118	124	126	Lm/W	116	122	124

SF/WR4/LN/48/MW/93S/MV/WH (4 Ft) @120V

20W	3000K	4000K	5000K	28W	3000K	4000K	5000K	36W	3000K	4000K	5000K
Lumens	2447	2515	2568	Lumens	3414	3535	3566	Lumens	4148	4314	4337
Lm/W	122	126	128	Lm/W	122	126	127	Lm/W	115	120	120

Ordering Code *(accessories)*


Catalog	Type
SF/BLS/LN/12V	Bi-level Motion Sensor
SF/BLS/LN/RMT	Remote for Motion Sensor
SF/EM/LN/4W	4W Emergency Backup Driver
SF/EM/LN/8W	8W Emergency Backup Driver
SF/PC/LN/1W	1W Photocell
SF/WR4/LN/SK	Suspension Kit

Photometric Data

SF/WR4/LN/24/MW/93S/MV/WH (2 Ft)

10W 5000K


Zone	Lumens	% Luminaire
0-30	332.31	25.90
0-90	1167.97	90.90
90-180	116.86	9.10
0-180	1284.83	100.00

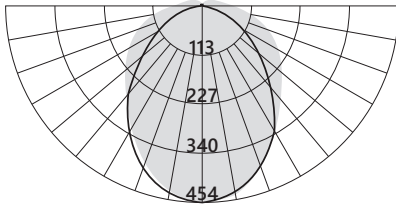

0-180° 90°-270°

15W 5000K


Zone	Lumens	% Luminaire
0-30	466.94	25.90
0-90	1639.36	91.00
90-180	161.37	9.00
0-180	1800.73	100.00

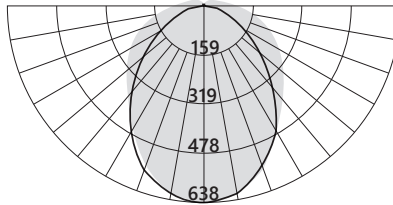

0-180° 90°-270°

18W 5000K

Zone	Lumens	% Luminaire
0-30	578.58	26.00
0-90	2030.18	91.10
90-180	198.23	8.90
0-180	2228.41	100.00

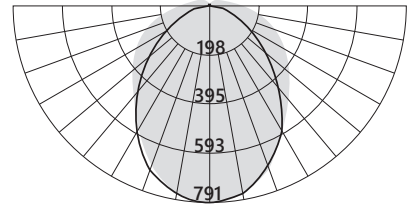


0-180° 90°-270°

SF/WR4/LN/36/MW/93S/MV/WH (3 Ft)

18W 5000K


Zone	Lumens	% Luminaire
0-30	605.58	25.30
0-90	2167.87	90.50
90-180	228.67	9.50
0-180	2396.54	100.00

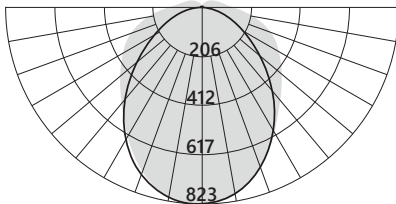

0-180° 90°-270°

25W 5000K


Zone	Lumens	% Luminaire
0-30	797.62	25.30
0-90	2855.47	90.40
90-180	301.58	9.60
0-180	3157.04	100.00

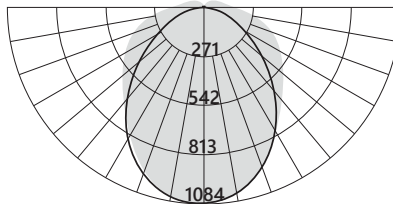

0-180° 90°-270°

30W 5000K

Zone	Lumens	% Luminaire
0-30	939.46	25.30
0-90	3364.37	90.40
90-180	355.56	9.60
0-180	3719.93	100.00

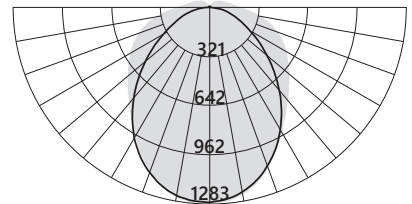


0-180° 90°-270°

SF/WR4/LN/48/MW/93S/MV/WH (4 Ft)

20W 5000K


Zone	Lumens	% Luminaire
0-30	650.55	25.30
0-90	2313.63	90.10
90-180	254.87	9.90
0-180	2568.50	100.00

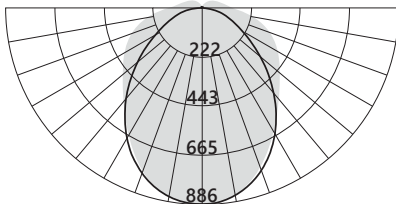

0-180° 90°-270°

28W 5000K


Zone	Lumens	% Luminaire
0-30	903.31	25.30
0-90	3212.20	90.10
90-180	353.63	9.90
0-180	3565.83	100.00

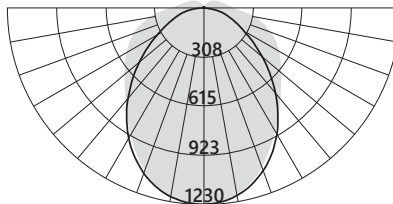

0-180° 90°-270°

36W 5000K


Zone	Lumens	% Luminaire
0-30	1097.53	25.30
0-90	3905.86	90.10
90-180	431.17	9.90
0-180	4337.03	100.00

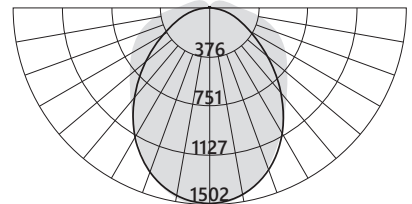

0-180° 90°-270°


Dimensions

Fixture	Width (A)	Length (B)	Height (C)
2'	4.3"	24.2"	3.25"
3'	4.3"	36"	3.25"
4'	4.3"	48.35"	3.25"

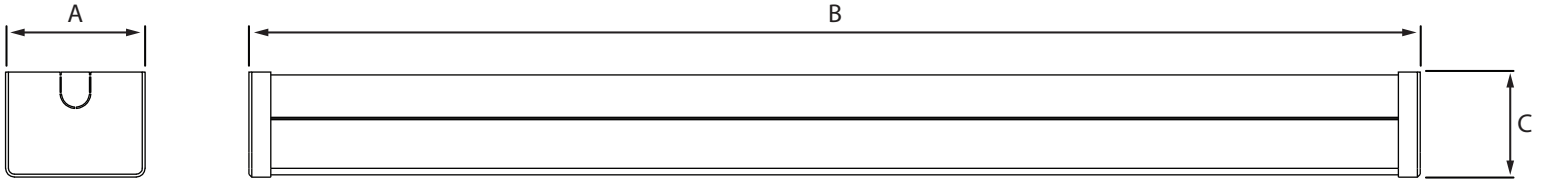

Included Hardware

Wall Anchor x2



Anchor Screw x2



32mm Machine Screw x2



P3 Wire Nut x5



Additional Accessories (sold separately)

Bi-level Motion Sensor



Catalog #: SF/BLS/LN/12V

Remote for Motion Sensor




Catalog #: SF/BLS/LN/RMT

4W Emergency Backup Driver




Catalog #: SF/EM/LN/4W

8W Emergency Backup Driver




Catalog #: SF/EM/LN/8W

1W Photocell

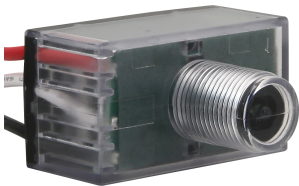

Catalog #: SF/PC/LN/1W

5Ft Suspension Kit



Catalog #: SF/WR4/LN/SK