

sunlite®

INSTALLATION INSTRUCTIONS


85258-SU | LFX/VTS/4'/45W/MV/40K | VAPORPROOF FIXTURE

Please read and understand this entire manual before attempting to assemble, operate or install the product.


WARNING: Avoid fire or electric shock. Follow installation instructions carefully. If unsure about electrical installation, consult a qualified electrician. Wear rubber-soled shoes and work on a sturdy wooden ladder. Ground fixture to avoid potential electric shock. Handle metal parts carefully to prevent cuts. To avoid a hazard to children, account for all parts and destroy all packing materials.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

CAUTION: Turn off the power at fuse or circuit breaker box before installation and maintenance. NOTE: This fixture is suitable for 120-277 Volt fused circuits. Fixture must be installed according to National Electric Code and local building codes. If you are unsure about wiring, consult a qualified electrician. DO NOT USE ON A DIMMING CIRCUIT.

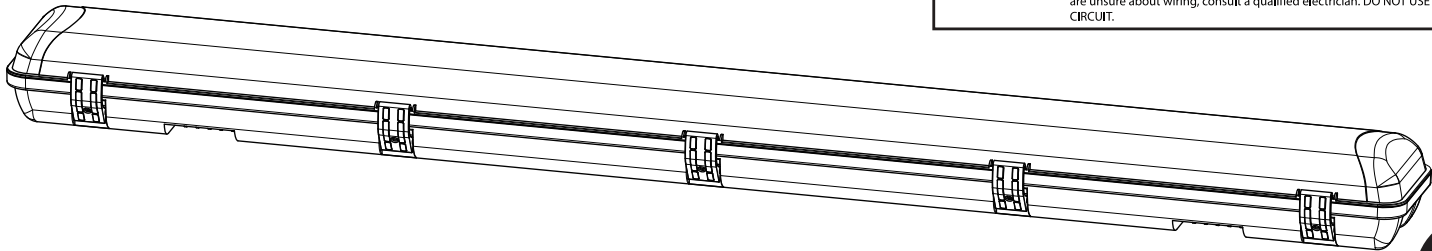

Introduction



Part	Item Name	Qty.
A	Fixture	1
B	Lens release latch	10
C	Conduit opening	2
D	Mounting adapter clip	2


Select suitable location that can support the weight of the fixture.

Suitable for use in the following locations:

- Ambient Temp: -20~+40°C
- Indoor and outdoor use
- Wet locations


Installation

Figure 1

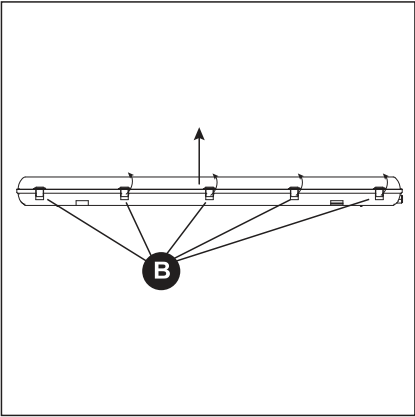

1. Open each of the lens release latch (B) and remove the lens.


Figure 2

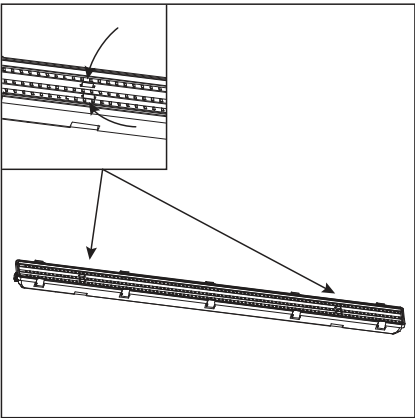

2. Press the two LED panel retaining clips together while lifting up the LED panel to release the LED panel from the housing.


Installation*(continued)*

Figure 3

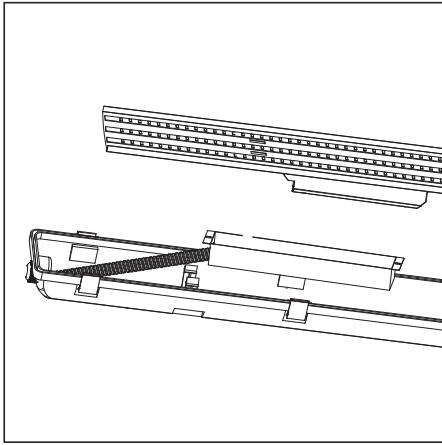

3. Connect the supply cord wires by routing the cord or conduit through the adapter entrance into the driver compartment. Connect the Line (L), Neutral (N), and Ground (G) leads into the push-in slots as marked on the LED driver unit.

Figure 4

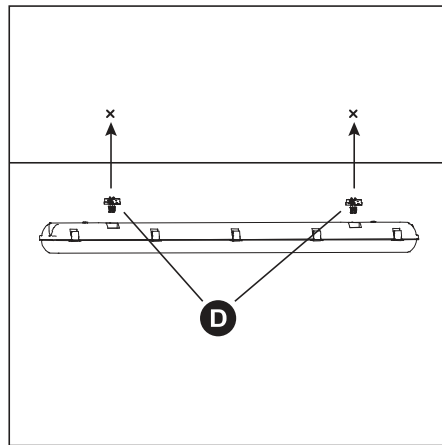

4. Measure the distance between the mounting adapter clips (D) and mark desired location on mounting surface. Drill and secure both mounting adapter clips onto mounting surface and secure the fixture by snap fitting the fixture over the mounting adapter clips.

Sunshine Lighting Company
744 Clinton Street Brooklyn, NY 11231, USA
T. 718.768.7000
F. 718.768.0970
www.sunlite.com