


85642-SU



SF/BLI/FP/24/MW/83S/MV/WH/2PK

2x4 Backlit Lay-In Flat Panel, Wattage and CCT Selectable

Project: _____
Type: _____
Catalog #: _____
Date: _____
Comments: _____

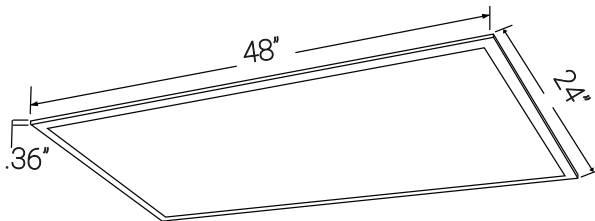

Technical Specifications

Photometrics

Lumen	3750/5000/6250
Emitted Color	CCT Selectable
Color Temp	35K/40K/50K
Color Rendering Index (CRI)	80+
Beam Spread	120°
Lifespan	50000

Electrical

Watt	30/40/50
Input Voltage	120-277
Power Factor	0.9
Dimmable	0-10V Low Voltage

Ratings / Certifications

Safety Certification	UL Listed - Damp Location
DLC	Pending
Operating Temperature	-4°F - 104°F
Warranty	5 Years

Construction

Fixture Material	Steel, Aluminum & PMMA
Fixture Finish	White
Lens Material	PMMA
Lens Finish	Diffuse
Shape	2X4
Mounting	Recessed