


# 85676-SU



SF/GC/MW80/83S/MV/BZ

LED Outdoor Canopy Fixture 100-277V 0-10V Dimmable  
40W/60W/80W CCT

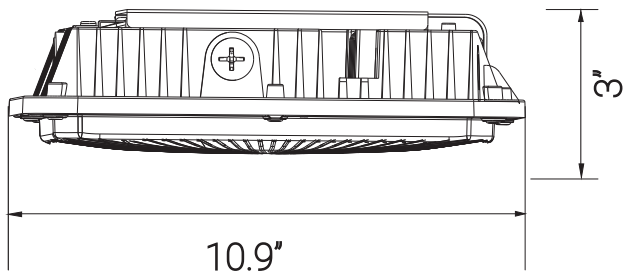

Project: \_\_\_\_\_  
Type: \_\_\_\_\_  
Catalog #: \_\_\_\_\_  
Date: \_\_\_\_\_  
Comments: \_\_\_\_\_

## Technical Specifications

### Photometrics

Lumen	5040/7560/10080
Emitted Color	CCT Selectable
Color Temp	30K/40K/50K
Color Rendering Index (CRI)	80+
Beam Spread	105°
Lifespan	50000

### Electrical

Watt	40/60/80
Input Voltage	120-277
Power Factor	0.9
Dimmable	0-10V Low Voltage

### Ratings / Certifications

Safety Certification	UL Listed - Wet Location
Operating Temperature	-40°F - 104°F
Warranty	5 Years

### Construction

Fixture Material	Die-Casting aluminum housing
Fixture Finish	Bronze
Lens Material	Polycarbonate
Lens Finish	Clear
Shape	Square
Mounting	Surface
Usage	Outdoor

