


# 85656-SU



SF/ST/LN/24/MW/85S/MV/WH/BLS

24" Linear Strip Light, Selectable CCT And Wattage With Bi-Level Sensor (Assy.)

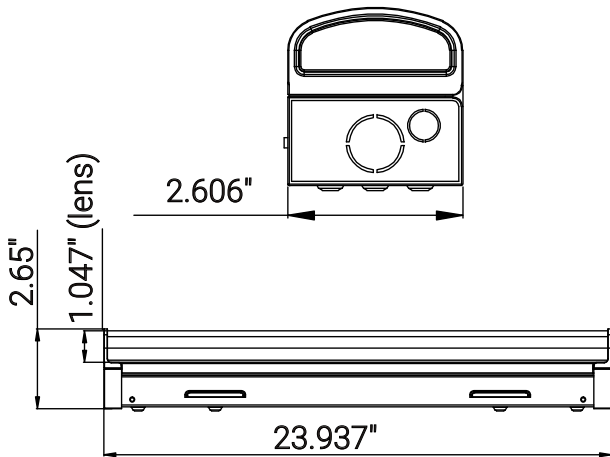

Project: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Catalog #: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 Comments: \_\_\_\_\_

## Technical Specifications

### Photometrics

Lumen	2060/2742/3167
Emitted Color	CCT Selectable
Color Temp	27K/30K/35K/40K/50K
Color Rendering Index (CRI)	80
Beam Spread	140°
Lifespan	50000

### Electrical

Watt	15/20/25
Input Voltage	120-277
Power Factor	0.9
Dimmable	0-10V Low Voltage

### Ratings / Certifications

Safety Certification	ETL - Damp Location
DLC	
Operating Temperature	-4°F - 120°F
Warranty	5 Years

### Construction

Fixture Material	Steel
Fixture Finish	White
Lens Material	Polycarbonate
Lens Finish	White
Shape	Linear
Mounting	Surface