


# 85218-SU



SF/TF/BS/24/MW/83S/MV/WH/2PK

2x4 Lay-In Troffer, Wattage and CCT Selectable, Multi Volt

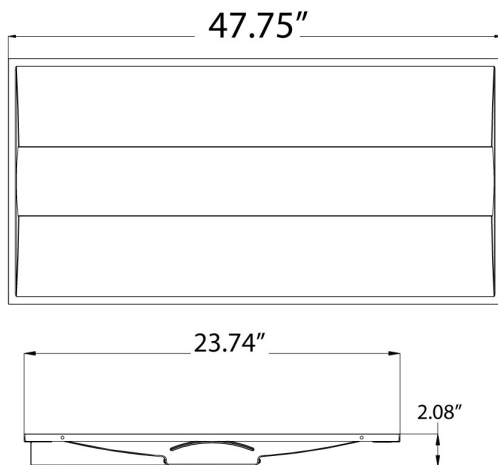

Project: \_\_\_\_\_  
Type: \_\_\_\_\_  
Catalog #: \_\_\_\_\_  
Date: \_\_\_\_\_  
Comments: \_\_\_\_\_

## Technical Specifications

### Photometrics

Lumen	3750/5000/6250
Emitted Color	CCT Selectable
Color Temp	35K/40K/50K
Color Rendering Index (CRI)	80
Beam Spread	120°
Lifespan	50000

### Electrical

Watt	30/40/50
Input Voltage	120-277
Power Factor	0.9
Dimmable	0-10V Low Voltage

### Ratings / Certifications

Safety Certification	IC Rated
DLC	TRUE
Operating Temperature	-4°F - 104°F
Warranty	5 Years

### Construction

Fixture Material	Steel & PC
Fixture Finish	White
Lens Material	PMMA
Lens Finish	Diffuse
Shape	2x4
Mounting	Recessed