


85618-SU

sunlite

LFX/PTL/SCT/MW

LED Post Top Light 120-277V 0-10V Dimmable Selectable CCT and Wattage

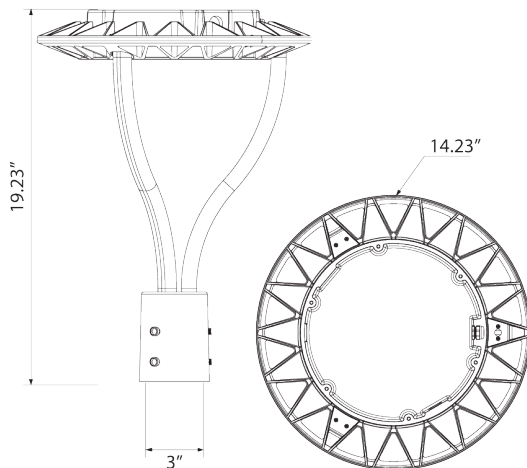

Project: _____
Type: _____
Catalog #: _____
Date: _____
Comments: _____

Technical Specifications

Photometrics

Lumen	7700/10500/21000
Emitted Color	CCT Selectable
Color Temp	30K/40K/50K
Color Rendering Index (CRI)	80
Beam Spread	360°
Lifespan Hours	50,000

Electrical

Watt	70/100/150
Input Voltage	120 - 277
Power Factor	0.9
Dimmable	0-10V Low Voltage

Ratings / Certifications

Safety Certification	UL Listed
DLC	TRUE
Operating Temperature	-40°F - 113°F
Warranty	5 Years

Construction

Fixture Material	Di-cast Aluminum
Fixture Finish	UV Resistant Powder Coatfinish
Lens Material	Polycarbonate
Shape	Round
Mounting	Post Mount
Use Location	Outdoor