


# 08563-SU



LFX/WP/SCT/HMW/MV/G3

High Output Slim Adjustable Wall pack 120-277V  
60W/90W/100W/120W - 30K-50K Bronze

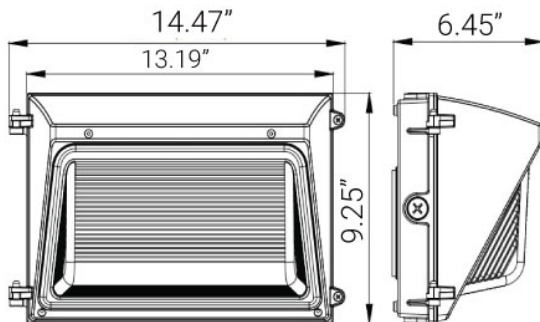

Project: \_\_\_\_\_  
Type: \_\_\_\_\_  
Catalog #: \_\_\_\_\_  
Date: \_\_\_\_\_  
Comments: \_\_\_\_\_

## Technical Specifications

### Photometrics

Lumen	9000/13500/15000/18000
Emitted Color	CCT Selectable
Color Temp	30K/40K/50K
Color Rendering Index (CRI)	80
Beam Spread	180°
Lifespan	50000

### Electrical

Watt	60/90/100/120
Input Voltage	120-277
Power Factor	0.9
Dimmable	TRUE

### Ratings / Certifications

Safety Certification	UL Listed - Wet Location
Operating Temperature	-40°F - 104°F
Warranty	5 Years

### Construction

Fixture Material	Die-Cast Aluminum
Fixture Finish	Bronze
Lens Material	Polycarbonate
Lens Finish	Clear
Shape	Rectangular
Mounting	Wall
Usage	Outdoor