


85645-SU



SF/BLI/FP/24/HMW/85S/MV/WH/4PK

2x4 Backlit Lay-In Flat Panel, Wattage and CCT Selectable

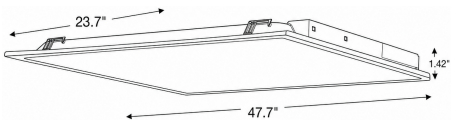

Project: _____
Type: _____
Catalog #: _____
Date: _____
Comments: _____

Technical Specifications

Photometrics

Lumen	4050/5400/6750/8100/10260
Emitted Color	CCT Selectable
Color Temp	30K/35K/40K/50K/65K
Color Rendering Index (CRI)	80
Beam Spread	120°
Lifespan	50,000 Hours

Electrical

Watt	30/40/50/60/72W
Input Voltage	120-277V
Power Factor	>0.9
Dimmable	Yes

Ratings / Certifications

Safety Certification	UL Listed - Damp Location
DLC	No
Operating Temperature	-20°C to 45°C
Warranty	5 Years
IC Rated	Yes

Construction

Fixture Material	Iron
Lens Material	Acrylic (PMMA)
Lens Finish	Frosted
Shape	Rectangle
Mounting	Recessed
Use Location	Indoor