


# 85621-SU



SF/ST/LN/24/MW/83S/MV/WH/BLS

LED Linear Strip Light Fixture, Power Selectable 15W/20W/25W, 120-277 Volts, 1950-3250 Lmns, Color Selectable 35K/40K/50K, Dimmable, Motion Sensor, ETL & DLC Listed, 140 Degree Beam Angle

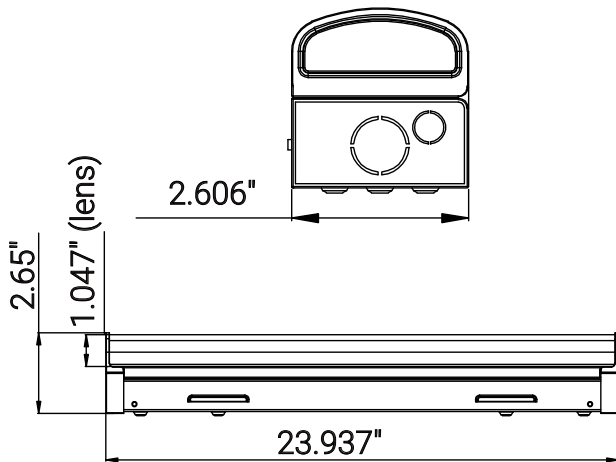

Project: \_\_\_\_\_  
Type: \_\_\_\_\_  
Catalog #: \_\_\_\_\_  
Date: \_\_\_\_\_  
Comments: \_\_\_\_\_

## Technical Specifications

### Photometrics

Lumen	2060/2742/3167
Emitted Color	CCT Selectable
Color Temp	35K/40K/50K
Color Rendering Index (CRI)	80
Beam Spread	140x110
Lifespan	50000

### Electrical

Watt	15/20/25
Input Voltage	120-277
Power Factor	0.9
Dimmable	0-10V Low Voltage

### Ratings / Certifications

Safety Certification	ETL - Damp Location
DLC	S-4FPTN6, S-8UOHVT
Operating Temperature	-4°F - 120°F
Warranty	5 Years

### Construction

Fixture Material	Steel
Fixture Finish	White
Lens Material	Polycarbonate
Lens Finish	White
Shape	Linear
Mounting	Surface