

sunlite[®]

Providing All of Your Lighting Needs Since 1980

2026



FIXTURE CATALOG

About Us

For over 40 years Sunshine Lighting has been providing quality and affordable solutions to the lighting industry and has evolved into a multinational enterprise, growing at a rapid pace to become a leading lighting manufacturer in North America. Sunshine Lighting offers a wide array of products under multiple brands including MKS LED®, Ambiate® and Sunlite® lamps and luminaires. We take great pride in maintaining a personal relationship with each customer. Sunshine Lighting has gained a reputation for quality and affordability while keeping up with the latest technologies.

The Sunlite® brand was introduced in 1996 to provide select lighting technologies consisting of Indoor, Industrial and Outdoor LED and Non-LED fixtures, as well as LED, Compact Fluorescent, HID, Halogen, Decorative, Miniature, Specialty, Stage and Studio lamps. Our dedicated team of technical and product specialists ensures that our products designed with safety and the environment in mind. Most products carry the Underwriters Laboratories (UL), Intertek's ETL Listing, Department of Energy (DOE) Energy Star certifications, Design Lights Consortium (DLC) qualified products listing, and/or the American Lighting Association (ALA) among others.

Through customer interaction and feedback, we introduce new and innovative products to the marketplace as well as continually improving our existing line of items to meet the high expectations our customers have come to rely on us. In addition, we provide exclusive service to customers whether it's a product tweak, modification, or full custom product, Sunshine Lighting's dedicated engineering and project management team is ready assist.

sunlite®

Copyright ©2026 Sunlite

For Product inquiries or to place an order, please contact us at:

TOLL FREE PHONE: 800.605. BULB

VISIT: www.sunlite.com

For general information and request a catalog: info@sunshinelighting.com

Sales department: sales@sunshinelighting.com

Terms & Conditions <https://sunlite.com/terms-of-use>

**NYC Warehouse
744 Clinton Street
Brooklyn, NY 11231
Tel: 718.768.7000
Fax: 718.768.0970**

Table of Contents

Indoor Fixture



Linear Ceiling Fixture
Page 6 - 9



Linear Fixture
Page 10 - 11



Under Cabinet Fixture
Page 12 - 13



Ceiling Lay-in Fixture
Page 14 - 15



Recessed Downlight Fixture
Page 16 - 25



Ceiling Flush Mount Fixture
Page 26 - 37



Track Light
Page 38



Pendant Fixture
Page 38 - 40



LED Module Retrofit Kit
Page 41



Bathroom Vanity Fixture
Page 42 - 49



Wall Mount Sconce
Page 50 - 52

Outdoor Fixture



Outdoor Wall Mount Sconce
Page 54-66



Outdoor Security Flood Light
Page 67



Outdoor Wall Mount Series
Page 68 - 71



Outdoor Area Fixtures
Page 71



LED Commercial UFO High Bay
Page 72



Outdoor Post Mounted Fixture
Page 73-74



Landscaping Fixtures
Page 74



Vaporproof
Page 75



LED Construction Work Light
Page 76 - 77

Exit Signs



Exit Sign & Emergency Lights Combo
Page 78



Exit Sign
Page 79-80



Emergency Light
Page 81



Step Light
Page 81





Indoor
Light Fixtures

Linear Ceiling Fixture

Narrow Strip

2FT

85655-SU

- 15/20/25 Watts
- 27K/30K/35K/40K/50K
- 2060/2742/3167 Lumens



4FT

85659-SU

- 28/35/40 Watts
- 27K/30K/35K/40K/50K
- 3877/4702/5287 Lumens



8FT

85628-SU

- 30/45/60 Watts
- 35K/40K/50K
- 4329/6435/8560 Lumens



OPTIONAL

SPECIFICATION

- Dimmable
- Steel Body
- White Lens
- White Finish
- 80 CRI
- 120-277V

OPTIONAL ADDONS



Remote
85639-SU



V-Hook & Chain
85636-SU



Corner Bracket
85638-SU



End Bracket
85635-SU

Quick & Easy Release

The ability to open the fixture without any tools can be a time-saving and convenient feature, especially during installation or maintenance.



*ATO = Contact us about assembled items, inventory, and lead time.

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
85655-SU	SF/ST/LN/24/MW/85S/MV/WH	15/20/25	2060/2742/3167	27K/30K/35K/40K/50K	50000	DL,DIM,DLC	2.65(h) 2.60(w) 23.95(d)
85656-SU*	SF/ST/LN/24/MW/85S/MV/WH/BLS	15/20/25	2060/2742/3167	27K/30K/35K/40K/50K	50000	DL,DIM,DLC	2.65(h) 2.60(w) 23.95(d)
85657-SU*	SF/ST/LN/24/MW/85S/MV/WH/EM	15/20/25	2060/2742/3167	27K/30K/35K/40K/50K	50000	DL,DIM,DLC	2.65(h) 2.60(w) 23.95(d)
85658-SU*	SF/ST/LN/24/MW/85S/MV/WH/BLS/EM	15/20/25	2060/2742/3167	27K/30K/35K/40K/50K	50000	DL,DIM,DLC	2.65(h) 2.60(w) 23.95(d)
85659-SU	SF/ST/LN/48/MW/85S/MV/WH	28/35/40	3877/4702/5287	27K/30K/35K/40K/50K	50000	DL,DIM,DLC	2.65(h) 2.60(w) 47.55(d)
85660-SU*	SF/ST/LN/48/MW/85S/MV/WH/BLS	28/35/40	3877/4702/5287	27K/30K/35K/40K/50K	50000	DL,DIM,DLC	2.65(h) 2.60(w) 47.55(d)
85661-SU*	SF/ST/LN/48/MW/85S/MV/WH/EM	28/35/40	3877/4702/5287	27K/30K/35K/40K/50K	50000	DL,DIM,DLC	2.65(h) 2.60(w) 47.55(d)
85662-SU*	SF/ST/LN/48/MW/85S/MV/WH/BLS/EM	28/35/40	3877/4702/5287	27K/30K/35K/40K/50K	50000	DL,DIM,DLC	2.65(h) 2.60(w) 47.55(d)
85654-SU	SF/ST/LN/48/HMW/83S/MV/WH	30/45/65	10000	35K/40K/50K	50000	DL,DIM,DLC	2.65(h) 2.60(w) 47.55(d)
85628-SU	SF/ST/LN/96/MW/83S/MV/WH	30/45/60	4329/6435/8560	35K/40K/50K	50000	DL,DIM,DLC	2.65(h) 2.60(w) 94.80(d)
85629-SU*	SF/ST/LN/96/MW/83S/MV/WH/BLS	30/45/60	4329/6435/8560	35K/40K/50K	50000	DL,DIM,DLC	2.65(h) 2.60(w) 94.80(d)
85630-SU*	SF/ST/LN/96/MW/83S/MV/WH/EM	30/45/60	4329/6435/8560	35K/40K/50K	50000	DL,DIM,DLC	2.65(h) 2.60(w) 94.80(d)
85631-SU*	SF/ST/LN/96/MW/83S/MV/WH/BLS/EM	30/45/60	4329/6435/8560	35K/40K/50K	50000	DL,DIM,DLC	2.65(h) 2.60(w) 94.80(d)

Linear Ceiling Fixture

Contemporary Strip



2FT 1 Light

85550-SU

- 10 Watts
- 1150 Lumens



SPECIFICATION

- 35K/40K/50K
- Dimmable
- Steel Body
- White Lens
- White Finish
- 83 CRI
- 120-277V

4FT 1 Light

85551-SU

- 20 Watts
- 2300 Lumens



2FT 2 Light

85552-SU

- 20 Watts
- 2300 Lumens



4FT 2 Light

85553-SU

- 40 Watts
- 4600 Lumens



*ATO = Contact us about assembled items, inventory, and lead time.

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
85550-SU	SF/ST/LN/24/1L/10W/83S/MV/WH	10	1150	30K/40K/50K	50000	DL,DIM,DLC	2.4(h) 2.1(w) 24.0(d)
08531-SU*	SF/ST/LN/24/1L/10W/83S/MV/WH/EM	10	1150	30K/40K/50K	50000	DL,DIM,DLC	2.4(h) 2.1(w) 24.0(d)
85551-SU	SF/ST/LN/48/1L/20W/83S/MV/WH	20	2300	30K/40K/50K	50000	DL,DIM,DLC	2.4(h) 2.1(w) 48.0(d)
85404-SU	LFX/ST/4FT/1L/15W/40K	15	1950	4000K	50000	DL,DIM,DLC	2.2(h) 1.8(w) 48.0(d)
08532-SU*	SF/ST/LN/48/1L/20W/83S/MV/WH/EM	20	2300	30K/40K/50K	50000	DL,DIM,DLC	2.4(h) 2.1(w) 48.0(d)
85552-SU	SF/ST/LN/24/2L/20W/83S/MV/WH	20	2300	30K/40K/50K	50000	DL,DIM,DLC	2.4(h) 3.8(w) 24.0(d)
90670-SU*	SF/ST/LN/24/2L/20W/83S/MV/WH/EM	20	2300	30K/40K/50K	50000	DL,DIM,DLC	2.4(h) 3.8(w) 24.0(d)
85553-SU	SF/ST/LN/48/2L/40W/83S/MV/WH	40	4600	30K/40K/50K	50000	DL,DIM,DLC	2.4(h) 3.8(w) 48.0(d)
90671-SU*	SF/ST/LN/48/2L/40W/83S/MV/WH/EM	40	4600	30K/40K/50K	50000	DL,DIM,DLC	2.4(h) 3.8(w) 48.0(d)

Specifications may change without notice. We are not responsible for any typographical errors


Linear Ceiling Fixture

Stairwell Wrap Strip


2FT

82115-SU

- 10/15/18 Watts
- 30K/40K/50K
- 1150/1725/2070 Lumens
- Dimmable
- Steel Body
- Frosted Lens
- White Finish
- 90 CRI
- 120-277V



4W EM Driver
85633-SU



V-Hook & Chain
85636-SU


3FT

82119-SU

- 18/25/30 Watts
- 2070/2875/3450 Lumens



8W EM Driver
85634-SU



V-Hook & Chain
85636-SU

4FT

82123-SU

- 20/28/36 Watts
- 1150/1725/2070 Lumens



Remote
85639-SU

OPTIONAL ADDONS

*ATO = Contact us about assembled items, inventory, and lead time.

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
82115-SU	SF/WR4/LN/24/MW/93S/MV/WH	10/15/18	1150/1725/2070	30K/40K/50K	50000	DL,DIM	3.25(h) 24.3(w) 4.3(d)
82117-SU*	SF/WR4/LN/24/MW/93S/MV/WH/EM	10/15/18	1150/1725/2070	30K/40K/50K	50000	DL,DIM	3.25(h) 24.3(w) 4.3(d)
82116-SU*	SF/WR4/LN/24/MW/93S/MV/WH/BLS	10/15/18	1150/1725/2070	30K/40K/50K	50000	DL,DIM	3.25(h) 24.3(w) 4.3(d)
82118-SU*	SF/WR4/LN/24/MW/93S/MV/WH/BLS/EM	10/15/18	1150/1725/2070	30K/40K/50K	50000	DL,DIM	3.25(h) 24.3(w) 4.3(d)
82119-SU	SF/WR4/LN/36/MW/93S/MV/WH	18/25/30	2070/2875/3450	30K/40K/50K	50000	DL,DIM	3.25(h) 36.0(w) 4.3(d)
82121-SU*	SF/WR4/LN/36/MW/93S/MV/WH/EM	18/25/30	2070/2875/3450	30K/40K/50K	50000	DL,DIM	3.25(h) 36.0(w) 4.3(d)
82120-SU*	SF/WR4/LN/36/MW/93S/MV/WH/BLS	18/25/30	2070/2875/3450	30K/40K/50K	50000	DL,DIM	3.25(h) 36.0(w) 4.3(d)
82122-SU*	SF/WR4/LN/36/MW/93S/MV/WH/BLS/EM	18/25/30	2070/2875/3450	30K/40K/50K	50000	DL,DIM	3.25(h) 36.0(w) 4.3(d)
82123-SU	SF/WR4/LN/48/MW/93S/MV/WH	20/28/36	2300/3220/4140	30K/40K/50K	50000	DL,DIM	3.25(h) 48.35(w) 4.3(d)
82125-SU*	SF/WR4/LN/48/MW/93S/MV/WH/EM	20/28/36	2300/3220/4140	30K/40K/50K	50000	DL,DIM	3.25(h) 48.35(w) 4.3(d)
82124-SU*	SF/WR4/LN/48/MW/93S/MV/WH/BLS	20/28/36	2300/3220/4140	30K/40K/50K	50000	DL,DIM	3.25(h) 48.35(w) 4.3(d)
82126-SU*	SF/WR4/LN/48/MW/93S/MV/WH/BLS/EM	20/28/36	2300/3220/4140	30K/40K/50K	50000	DL,DIM	3.25(h) 48.35(w) 4.3(d)

Linear Ceiling Fixture

Wrap Strip & Vapor Tight



4FT 7" Wrap Strip Linear Fixture

85292-SU

- 30/35/40 Watts
- 35K/40K/50K
- 5360/4795/4200 Lumens



OPTIONAL

SPECIFICATION

- Dimmable
- White Finish Steel Body
- White Lens
- 80 CRI
- 120-277V

4FT 5" Wrap Strip Linear Fixture

85288-SU

- 30/40/50 Watts
- 30K/40K/50K
- 4300 Lumens



SPECIFICATION

- White Finish Steel Body
- White Lens
- 80 CRI
- 120-277V

4FT Linear Vapor Proof Fixture

85260-SU

- 25/38/50 Watts
- 3500/5400/7000 Lumens



OPTIONAL

SPECIFICATION

- 35K/40K/50K
- Polycarbonate Body
- White Lens
- Gray Finish
- 80 CRI
- 120-277


8FT

85261-SU

- 72/80/100 Watts
- 9800/11000/13500 Lumens



OPTIONAL ADDONS



*ATO = Contact us about assembled items, inventory, and lead time.

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
85292-SU	SF/WA7/ST/48/MW/83S/MV/WH	30/35/40	5360/4795/4200	35K/40K/50K	50000	DL,DIM,DLC	2.8(h) 7.08(w) 47.72(d)
90721-SU*	SF/WA7/ST/48/MW/83S/MV/WH/EM	30/35/40	5360/4795/4200	35K/40K/50K	50000	DL,DIM,DLC	2.8(h) 7.08(w) 47.72(d)
90722-SU*	SF/WA7/ST/48/MW/83S/MV/WH/BLS	30/35/40	5360/4795/4200	35K/40K/50K	50000	DL,DIM,DLC	2.8(h) 7.08(w) 47.72(d)
90723-SU*	SF/WA7/ST/48/MW/83S/MV/WH/EM/BLS	30/35/40	5360/4795/4200	35K/40K/50K	50000	DL,DIM,DLC	2.8(h) 7.08(w) 47.72(d)
85288-SU	SF/WA5/ST/48/MW/83S/MV/WH	30/40/50	3450/4600/5750	30K/40K/50K	50000	DL,DLC	2.2(h) 5.15(w) 48.0(d)
85260-SU	SF/VTS/ST/48/MW/83S/MV/GR	25/38/50	3500/5400/7000	35K/40K/50K	50000	WL,DIM,DLC	3.42(h) 49.7(w) 3.34(d)
90735-SU*	SF/VTS/ST/48/MW/83S/MV/GR/EM	25/38/50	3500/5400/7000	35K/40K/50K	50000	WL,DIM,DLC	3.42(h) 49.7(w) 3.34(d)
90748-SU*	SF/VTS/ST/48/MW/83S/MV/GR/BLS	25/38/50	3500/5400/7000	35K/40K/50K	50000	WL,DIM,DLC	3.42(h) 49.7(w) 3.34(d)
90737-SU*	SF/VTS/ST/48/MW/83S/MV/GR/EM/BLS	25/38/50	3500/5400/7000	35K/40K/50K	50000	WL,DIM,DLC	3.42(h) 49.7(w) 3.34(d)
85261-SU	SF/VTS/ST/96/MW/83S/MV/GR	72/80/100	9800/11000/13500	35K/40K/50K	50000	WL,DIM,DLC	4.13(h) 96.0(w)4.33(d)
85265-SU*	SF/VTS/ST/96/MW/83S/MV/GR/BLS	72/80/100	9800/11000/13500	35K/40K/50K	50000	WL,DIM,DLC	4.13(h) 96.0(w)4.33(d)
90745-SU*	SF/VTS/ST/96/MW/83S/MV/GR/EM	72/80/100	9800/11000/13500	35K/40K/50K	50000	WL,DIM,DLC	4.13(h) 96.0(w)4.33(d)
85271-SU*	SF/VTS/ST/96/MW/83S/MV/GR/EM/BLS	72/80/100	9800/11000/13500	35K/40K/50K	50000	WL,DIM,DLC	4.13(h) 96.0(w)4.33(d)

Specifications may change without notice. We are not responsible for any typographical errors

SUNLITE.COM CALL 718.768.7000 TOLL-FREE 800.605.BULB

Linear Fixture

Bed Light Wrap Strip



3FT

49189-SU

- 15/30/45 Watts
- 30K/40K/50K
- 1794/3590/5311 Lumens
- Dimmable
- Steel and Aluminum Body
- White Lens
- White Finish
- 80 CRI
- 120V



LED
BUILT-IN

5
YEAR
WARRANTY

BATTERY
BACKUP
OPTIONAL

OPTIONAL ADDONS



Pull Chain Sets
04328-CMP

4FT

49190-SU

- 20/40/60 Watts
- 30K/40K/50K
- 2348/4697/6958 Lumens
- Dimmable
- Steel and Aluminum Body
- White Lens
- White Finish
- 80 CRI
- 120V



LED
BUILT-IN

5
YEAR
WARRANTY

BATTERY
BACKUP
OPTIONAL

OPTIONAL ADDONS



Pull Chain Sets
04328-CMP

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
49189-SU	SF/BL/LN/36/45/83S/120/WH	15/30/45	1794/3590/5311	30K/40K/50K	50000	DL,DIM,DLC	4.06(h) 4.22(w) 36(d)
49190-SU	SF/BL/LN/48/60/83S/120/WH	20/40/60	2348/4697/6958	30K/40K/50K	50000	DL,DIM,DLC	4.06(h) 4.22(w) 48.0(d)

Linear Fixture

Under Cabinet Strip



12"

53107-SU

- 5 Watts
- 500 Lumens



SPECIFICATION

- 30K/40K/50K
- Dimmable
- Aluminum & PC Body
- Frosted Lens
- White Finish
- 80 CRI
- 120V

22"

53108-SU

- 9 Watts
- 900 Lumens



34"

53109-SU

- 12 Watts
- 1200 Lumens



46"

53110-SU

- 16 Watts
- 1600 Lumens



OPTIONAL ADDONS

Hardwire Junction Box
53084-SU

18" Linkable (Hard Wire)

53079-SU

- 10 Watts
- 30K/40K/50K
- 600 Lumens
- Dimmable
- Metal & Acrylic Body
- White Lens
- White Finish
- 90 CRI
- 120V



OPTIONAL ADDONS



Remote
85639-SU

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
53107-SU	SF/UC/LN/12/5W/83S/120/WH	5	500	30K/40K/50K	50000	DL	1.2(h) 0.9(w) 12.3(d)
53108-SU	SF/UC/LN/22/9W/83S/120/WH	9	900	30K/40K/50K	50000	DL	1.2(h) 0.9(w) 22.6(d)
53109-SU	SF/UC/LN/34/12W/83S/120/WH	12	1200	30K/40K/50K	50000	DL	1.2(h) 0.9(w) 34.4(d)
53110-SU	SF/UC/LN/46/16W/83S/120/WH	16	1600	30K/40K/50K	50000	DL	1.2(h) 0.9(w) 46.2(d)
53079-SU	SF/HUC/LN/18/10W/93S/120/WH	10	600	30K/40K/50K	50000	DL,DIM	1.0(h) 3.7(w) 18.1(d)

Specifications may change without notice. We are not responsible for any typographical errors

LED Shop Light

Slim and linkable

LFX/ST/T8/4FT/32W/50K Slim T8 Strip Light 100-277V w/
Plug, w/Connector cable. shoplite/SUCCOS LIGHT LINKABLE



85415-SU

- 32 Watt
- 4400 Lumen
- 100-277 Volt
- 50000 Hours
- 5000K
- 5 FT cord



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
85415-SU	LFX/ST/T8/4FT/32W/50K	32	4400	5000K	50000	DL,DIM	1.46(h) 0.98(w) 47.0(d)

LFX/SHOP/32W/IP65/50K LED SHOPLITE™
SUCCOS LIGHT WATER RESISTANT



85314-SU

- 32W Watt
- 4480 Lumen
- 100-277 Volt
- 50000 Hours
- 5000K



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
85314-SU	LFX/ST/T8/4FT/32W/50K	32	4400	5000K	50000	DL,DIM	1.46(h) 0.98(w) 47.0(d)

LED Under Cabinet

Puck Light

1 Head Puck Light

88921-SU

- 4.3 Watts
- 4000K
- 215 Lumens
- Aluminum Body
- Polycarbonate Lens
- White Finish
- 90 CRI
- 120V



3 Head Puck Light

88922-SU

- 12.9 Watts
- 4000K
- 645 Lumens
- Aluminum Body
- Polycarbonate Lens
- White Finish
- 90 CRI
- 120V



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
88921-SU	SF/PL/1H/4.3W/940/WH	4.3	215	4000K	30000	DL, DIM	0.9(h) 2.75 (d)
88922-SU	SF/PL/3H/12.9W/940/WH	12.9	645	4000K	30000	DL, DIM	0.9(h) 2.75 (d)

LED Under Cabinet

Linkable (Plug-In)



40in

88623-SU

- 40 in
- 15 Watt
- 900 Lumen
- 24 Volt
- 50000 Hours
- 3000K

20in

88619-SU

- 20 in
- 8 Watt
- 480 Lumen
- 24 Volt
- 50000 Hours
- 3000K

12in

88616-SU

- 12 in
- 5 Watt
- 300 Lumen
- 24 Volt
- 50000 Hours
- 4000K

OPTIONAL ADDONS



88638-SU Master On-Off Switch



88641-SU Dimmer Touch Sensor



88642-SU Dimmer Press Buttons



88639-SU Dimmer Infrared Sensor



88635-SU 8-Way Power Splitter



88636-SU Cable Connector

Plug Power Supply



- 88643-SU 6 Watts
- 88645-SU 24 Watts
- 88646-SU 36 Watts

Hardwire Power Supply



- 88647-SU 6 Watts
- 88648-SU 12 Watts
- 88649-SU 24 Watts
- 88650-SU 36 Watts



88633-SU Hardwire Connector



88630-SU Linear Connector



88631-SU Horizontal "L" Connector



88632-SU Vertical "L" Connector



88637-SU Adjustable Mounting Clip

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
12", 20", and 40" Length								
88616-SU	LFX/UCF/12/40K	5	300	24	4000K	50000	DL,DIM	12 (w)
88619-SU	LFX/UCF/20/30K	8	480	24	3000K	50000	DL,DIM	20 (w)
88620-SU	LFX/UCF/20/40K	8	480	24	4000K	50000	DL,DIM	20 (w)
88623-SU	LFX/UCF/40/30K	15	900	24	3000K	50000	DL,DIM	40 (w)
88624-SU	LFX/UCF/40/40K	15	900	24	4000K	50000	DL,DIM	40 (w)

Specifications may change without notice. We are not responsible for any typographical errors

Ceiling Lay-in Fixture

Backlit Lay-In Flat Panel

1x4

85640-SU

- 20/40/40 Watts
- 35K/40K/50K
- 2500/3750/5000 Lumens
- Dimmable
- Steel and Aluminum Body
- White Lens
- White Finish
- 80 CRI
- 120-277V



OPTIONAL



Recessed Kit
85087-SU

6FT Conduit Kit
85647-SU



Flange Kit
85652-SU



Surface Frame Kit
85146-SU



EM Inverter
88154-SU



Suspension Kit
85129-SU

OPTIONAL ADDONS

2x2

85641-SU

- 26/32/40 Watts
- 30K/35K/40K/50K/65K
- 2500/3750/5000 Lumens
- Dimmable
- Steel and Aluminum Body
- White Lens
- White Finish
- 80 CRI
- 120-277V



OPTIONAL



Surface Frame Kit
85144-SU



Recessed Kit
85651-SU



EM Inverter
88154-SU

Conduit Kit
85648-SU

OPTIONAL ADDONS

2x4

85642-SU

- 32/40/50 Watts
- 30K/35K/40K/50K/65K
- 4000/5000/6250 Lumens
- Dimmable
- Steel and Aluminum Body
- White Lens
- White Finish
- 80 CRI
- 120-277V



OPTIONAL



Recessed Kit
85651-SU



Surface Frame Kit
85149-SU



Flange Kit
85652-SU



EM Inverter
88154-SU



Suspension Kit
85129-SU

OPTIONAL ADDONS

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
85640-SU	SF/BLI/FP/14/MW/83S/MV/WH/2PK	20/30/40	2500/3750/5000	35K/40K/50K	50000	DL,DIM,DLC	1.4(h) 47.8(w) 11.9(d)
85641-SU	SF/BLI/FP/22/MW/83S/MV/WH/2PK	26/32/40	2500/3750/5000	30K/35K/40K/50K/65K	50000	DL,DIM,DLC	1.4(h) 23.7(w) 23.7(d)
85642-SU	SF/BLI/FP/24/MW/83S/MV/WH/2PK	32/40/50	4000/5000/6250	30K/35K/40K/50K/65K	50000	DL,DIM,DLC	1.4(h) 47.8(w) 23.7(d)

Ceiling Lay-in Fixture

Center-Basket Troffer



Wattage & Color Selectable

These Troffer let you select the color temperature (3500K, 4000K, or 5000K) and wattage adjustable brightness. A Microwave Motion Sensor detects movement and automatically turns the light on or adjusts brightness, saving energy and adding convenience.



2x2

85217-SU

- 20/30/40 Watts
- 35K/40K/50K
- 2800/4200/5600 Lumens
- Dimmable
- Steel Body
- White Lens
- White Finish
- 80 CRI
- 100-277V



OPTIONAL



Surface Frame Kit
85144-SU



Microwave Motion Sensor
85219-SU

OPTIONAL ADDONS

2x4

85218-SU

- 30/40/50 Watts
- 35K/40K/50K
- 4000/5300/6300 Lumens
- Dimmable
- Steel Body
- White Lens
- White Finish
- 80 CRI
- 100-277V



OPTIONAL



Microwave Motion Sensor
85219-SU

OPTIONAL ADDONS

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
85217-SU	SF/TF/BS/22/MW/83S/MV/WH/2PK	20/30/40	2800/4200/5600	35K/40K/50K	50000	DL,DIM,DLC	2.8(h) 23.8(w) 23.8(d)
85218-SU	SF/TF/BS/24/MW/83S/MV/WH/2PK	30/40/50	4000/5300/6300	35K/40K/50K	50000	DL,DIM,DLC	2.8(h) 23.8(w)47.8(d)

Recessed Downlight Fixture

Commercial

4"

87808-SU

- 9/13/18 Watts
- 27K/30K/35K/40K/50K
- 1000/1500/2000 Lumens
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120-347V



OPTIONAL

OPTIONAL ADDONS



LED EM Inverter
88154-SU



New Construction Plate
87818-CMP

6"

87809-SU

- 3/19/27 Watts
- 27K/30K/35K/40K/50K
- 1500/2100/3000 Lumens
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120-347V



OPTIONAL

OPTIONAL ADDONS



LED EM Inverter
88154-SU



New Construction Plate
87818-CMP



New Construction Plate
87705-SU

8"

87810-SU

- 18/27/36 Watts
- 27K/30K/35K/40K/50K
- 2000/3000/4000 Lumens
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120-347V



9.5"

87811-SU

- 20/30/40 Watts
- 27K/30K/35K/40K/50K
- 2500/3750/5000 Lumens
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120-347V



OPTIONAL

OPTIONAL ADDONS



LED EM Inverter
88154-SU

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
87808-SU	SF/CRD/RD/4/MW/95S/MV/WH/V2	9/13/18	1000/1500/2000	27K/30K/35K/40K/50K	50000	DL,DIM	4.0(h) 5.9(d)
87809-SU	SF/CRD/RD/6/MW/95S/MV/WH/V2	13/19/27	1500/2100/3000	27K/30K/35K/40K/50K	50000	DL,DIM	4.4(h) 8.25(d)
87810-SU	SF/CRD/RD/8/MW/95S/MV/WH/V2	18/27/36	2000/3000/4000	27K/30K/35K/40K/50K	50000	DL,DIM	4.75(h) 10.25(d)
87811-SU	SF/CRD/RD/9.5/MW/95S/MV/WH/V2	20/30/40	2500/3750/5000	27K/30K/35K/40K/50K	50000	DL,DIM	4.75(h) 11.2(d)

8"

87737-SU

- 55 Watts
- 27K/30K/35K/40K/50K
- 1000/1500/2000 Lumens
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120-277V



LED BUILT-IN **5 YEAR WARRANTY** **IC RATED** **BATTERY BACKUP OPTIONAL**


OPTIONAL ADDONS



LED EM Inverter
88154-SU

Direct to Junction Box

MULTIPLE INSTALLATION OPTIONS - installs directly to an octagon junction box or attach the included retrofit hardware for 4" recessed can installation

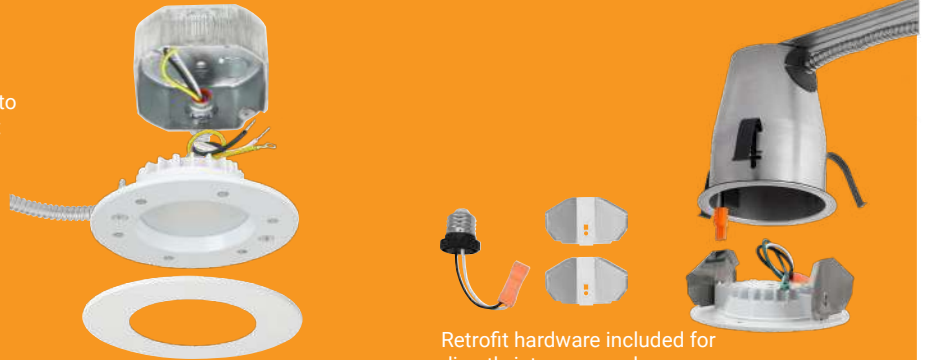

Retrofit hardware included for directly into recessed cans

4" Round Flat Lens Downlight

SPECIFICATION

- 10 Watts
- 900 Lumens
- Dimmable
- Aluminum Body
- Glass Lens
- White Finish
- 90 CRI



87688-SU

2700K

87689-SU

3000K

87690-SU

4000K

4" Round Regressed Lens Downlight

SPECIFICATION

- 13 Watts
- 1050 Lumens
- Dimmable
- Aluminum Body
- Glass Lens
- White Finish
- 90 CRI



87691-SU

2700K

87692-SU

3000K

LED BUILT-IN **5 YEAR WARRANTY**

OPTIONAL ADDONS



Silver Trim
87696-SU

Black Trim
87695-SU

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
87737-SU	LFX/CRD/SCT/8R/55W/8"	55	5000	120-277	30K/35K/40K/50K	50000	WL,DIM	5.65(h) 10.00(w)
87691-SU	SF/DRL/RD/4/13/927/120/WH	13	1050	120	2700K	50000	DL,DIM	1.4(h) 4.85(w)
87692-SU	SF/DRL/RD/4/13/930/120/WH	13	1050	120	3000K	50000	DL,DIM	1.4(h) 4.85(w)
87688-SU	SF/DFL/RD/4/10/927/120/WH	10	900	120	2700K	50000	DL,DIM	1.0(h) 4.85(w)
87689-SU	SF/DFL/RD/4/10/930/120/WH	10	900	120	3000K	50000	DL,DIM	1.0(h) 4.85(w)
87690-SU	SF/DFL/RD/4/10/940/120/WH	10	900	120	4000K	50000	DL,DIM	1.0(h) 4.85(w)

Specifications may change without notice. We are not responsible for any typographical errors

Recessed Downlight Fixture

Canless Gimbel - White

1 Light

85607-SU

- 12 Watts
- 27K/30K/35K/40K/50K
- 825 Lumens
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120V



OPTIONAL ADDONS



LED EM Inverter
88154-SU



New Construction Plate
87705-SU



New Construction Plate
87819-CMP

2 Light

85608-SU

- 24 Watts
- 27K/30K/35K/40K/50K
- 1540 Lumens
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120V



OPTIONAL ADDONS



LED EM Inverter
88154-SU



New Construction Plate
87819-CMP

3 Light

85609-SU

- 36 Watts
- 27K/30K/35K/40K/50K
- 2270 Lumens
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120V



OPTIONAL ADDONS



LED EM Inverter
88154-SU



New Construction Plate
87819-CMP

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
85607-SU	SF/GDL/RD/3.5/1L/12W/95S/120/WH	12	825	27K/30K/35K/40K/50K	50000	WL,DIM	(W) 4.38 (H) 3.25 (D) 4.38
85608-SU	SF/GDL/RD/3.5/2L/24W/95S/120/WH	24	1540	27K/30K/35K/40K/50K	50000	WL,DIM	(W) 7.88 (H) 3.25 (D) 4.38
85609-SU	SF/GDL/RD/3.5/3L/36W/95S/120/WH	36	2270	27K/30K/35K/40K/50K	50000	WL,DIM	(W) 11.68 (H) 3.25 (D) 4.38

Recessed Downlight Fixture

Canless Gimbel - Black



1 Light

08590-SU

- 12 Watts
- 27K/30K/35K/40K/50K
- 825 Lumens
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120V



OPTIONAL ADDONS



LED EM Inverter
88154-SU



New Construction Plate
87705-SU



New Construction Plate
87819-CMP

2 Light

08594-SU

- 24 Watts
- 27K/30K/35K/40K/50K
- 1540 Lumens
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120V



OPTIONAL ADDONS



LED EM Inverter
88154-SU



New Construction Plate
87819-CMP

3 Light

08593-SU

- 36 Watts
- 27K/30K/35K/40K/50K
- 2270 Lumens
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120V



OPTIONAL ADDONS



LED EM Inverter
88154-SU



New Construction Plate
87819-CMP

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
08590-SU	SF/GDL/RD/3.5/1L/12W/95S/120/WH/BK	12	825	27K/30K/35K/40K/50K	50000	WL,DIM	(W) 4.38 (H) 3.25 (D) 4.38
08594-SU	SF/GDL/RD/3.5/2L/24W/95S/120/WH/BK	24	1540	27K/30K/35K/40K/50K	50000	WL,DIM	(W) 7.88 (H) 3.25 (D) 4.38
08593-SU	SF/GDL/RD/3.5/3L/36W/95S/120/WH/BK	36	2270	27K/30K/35K/40K/50K	50000	WL,DIM	(W) 11.68 (H) 3.25 (D) 4.38

Recessed Downlight Fixture

Interchangeable Regressed Trims

Interchangeable Trim

Quickly and easily update your lighting style in the future with a twist-lock application that makes trim changes simple. Choose from Round and Square trims.



Twist lock application that is easy to change the trim style



SUNLITE.COM CALL 718.768.7000 TOLL-FREE 800.605.BULB

2"

85589-SU

- 15 Watts
- 27K/30K/35K/40K/50K
- 1055 Lumens
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120V



LED
BUILT-IN

5
YEAR
WARRANTY

IC
RATED

BATTERY
BACKUP
OPTIONAL

OPTIONAL ADDONS

LED EM Inverter
88154-SU

New Construction Plate
87705-SU

Black Round Trim
85592-SU

Brushed Nickel Round Trim
85593-SU

White Square Trim
85594-SU

Black Square Trim
85595-SU

Silver Square Trim
85596-SU

4"

85590-SU

- 18 Watts
- 27K/30K/35K/40K/50K
- 1360 Lumens
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120V



LED
BUILT-IN

5
YEAR
WARRANTY

IC
RATED

BATTERY
BACKUP
OPTIONAL

OPTIONAL ADDONS

LED EM Inverter
88154-SU

New Construction Plate
87705-SU

Black Round Trim
85597-SU

Brushed Nickel Round Trim
85598-SU

White Square Trim
85599-SU

Black Square Trim
85600-SU

Silver Square Trim
85601-SU

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
85589-SU	SF/DAD/RD/2/15W/95S/120/WH	15	1055	27K/30K/35K/40K/50K	50000	WL,DIM	(H) 4.92 (D) 3.13
85590-SU	SF/DAD/RD/4/18W/95S/120/WH	18	1360	27K/30K/35K/40K/50K	50000	WL,DIM	(H) 4.8 (D) 4.5

6" Interchangeable Trims

85591-SU

- 24 Watts
- 27K/30K/35K/40K/50K
- 1735 Lumens
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120V



OPTIONAL

OPTIONAL ADDONS

LED EM Inverter 88154-SU
 New Construction Plate 87705-SU
 Black Round Trim 85602-SU
 Brushed Nickel Round Trim 85603-SU
 White Square Trim 85604-SU
 Black Square Trim 85605-SU
 Silver Square Trim 85606-SU

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
85591-SU	SF/DAD/RD/6/24W/95S/120/WH	24	1735	27K/30K/35K/40K/50K	50000	WL,DIM	(H) 2.95 (D) 7.3

3" Gimbel

82098-SU

- 8 Watts
- 27K/30K/35K/40K/50K
- 600 Lumens
- Dimmable
- Aluminum Body
- Clear Lens
- White Finish
- 90 CRI
- 120V



OPTIONAL ADDONS

New Construction Plate 87705-SU

4" Allie

87817-SU

- 20 Watts
- 30K/40K/50K
- 1500 Lumens
- Dimmable
- Aluminum Body
- Frosted Lens
- White Finish
- 80 CRI
- 120-277V



OPTIONAL ADDONS

New Construction Plate 87818-CMP
 New Construction Plate 87705-SU
 LED EM Inverter 88154-SU
 Black Trim 50120-SU

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
82098-SU	SF/GDL/RD/3/8W/95S/120/WH	8	600	27K/30K/35K/40K/50K	50000	WL,DIM	1.8(w) 3.3(d)
87817-SU	SF/ALLIE/RD/4/20W/83S/MV/WH	20	1500	30K/40K/55K	50000	DL,DIM	1.75 (h) 4.75(d)

Specifications may change without notice. We are not responsible for any typographical errors

Recessed Downlight Fixture

Round Canless Slim Wafer - High Output

3"

87831-SU

- 8 Watts
- 27K/30K/35K/40K/50K
- 665 Lumens
- Dimmable
- Aluminum & Plastic Body
- White Lens
- White Finish
- 90 CRI
- 120V



OPTIONAL ADDONS



New Construction Plate
87818-CMP



New Construction Plate
87705-SU



LED EM Inverter
88154-SU

4"

87832-SU

- 13 Watts
- 27K/30K/35K/40K/50K
- 1100 Lumens
- Dimmable
- Aluminum & Plastic Body
- White Lens
- White Finish
- 90 CRI
- 120V



OPTIONAL ADDONS



New Construction Plate
87818-CMP



New Construction Plate
87705-SU



LED EM Inverter
88154-SU

6"

87833-SU

- 16 Watts
- 27K/30K/35K/40K/50K
- 1500 Lumens
- Dimmable
- Aluminum Body
- Frosted Lens
- White Finish
- 90 CRI
- 120V



OPTIONAL ADDONS



New Construction Plate
87818-CMP



New Construction Plate
87705-SU



LED EM Inverter
88154-SU

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
87831-SU	SF/SDH/RD/3/8/95S/120/WH/V2	8	665	27K/30K/35K/40K/50K	50000	WL,DIM	0.51 (h) 3.0(d)
87832-SU	SF/SDH/RD/4/13/95S/120/WH/V2	13	1100	27K/30K/35K/40K/50K	50000	WL,DIM	0.51 (h) 4.84(d)
87833-SU	SF/SDH/RD/6/16/95S/120/WH/V2	16	1500	27K/30K/35K/40K/50K	50000	WL,DIM	0.51 (h) 6.80(d)

Recessed Downlight Fixture

Round Canless Slim Wafer

6"

87801-SU

- 14 Watts
- 27K/30K/35K/40K/50K
- 1000 Lumens
- Dimmable
- Aluminum Body
- Frosted Lens
- White Finish
- 90 CRI
- 120V



OPTIONAL ADDONS



New Construction Plate
87818-CMP



New Construction Plate
87807-CMP



New Construction Plate
87705-SU



LED EM Inverter
88154-SU



Black Trim
50121-SU

8"

87804-SU

- 18 Watts
- 27K/30K/35K/40K/50K
- 1100 Lumens
- Dimmable
- Aluminum Body
- Frosted Lens
- White Finish
- 90 CRI
- 120V



OPTIONAL ADDONS



New Construction Plate
87818-CMP



New Construction Plate
87807-CMP



New Construction Plate
87705-SU



LED EM Inverter
88154-SU



Black Trim
50121-SU

4" Square Canless Slim Wafer

87802-SU

- 12 Watts
- 27K/30K/35K/40K/50K
- 800 Lumens
- Dimmable
- Aluminum Body
- Frosted Lens
- White Finish
- 90 CRI
- 120V



OPTIONAL ADDONS




New Construction Plate
87818-CMP



New Construction Plate
87705-SU



New Construction Plate
87726-SU



LED EM Inverter
88154-SU

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
87801-SU	SF/SDL/RD/6/14W/95S/120/WH	14	1000	27K/30K/35K/40K/50K	50000	WL,DIM	1.0(h) 6.85(d)
87804-SU	SF/SDL/RD/8/18W/95S/120/WH	18	1100	27K/30K/35K/40K/50K	50000	WL,DIM	1.0(h) 8.85(d)

Recessed Downlight Fixture

Square Canless Slim Wafer & Square Retrofit

6"

87709-SU

- 12 Watts
- 27K/30K/35K/40K/50K
- 950 Lumens
- Dimmable
- Aluminum Body
- Frosted Lens
- White Finish
- 90 CRI
- 120V



OPTIONAL ADDONS



Square Retrofit

4"

89200-SU

- 11 Watts
- 27K/30K/35K/40K/50K
- 750 Lumens
- Dimmable
- Aluminum & Plastic Body
- White Lens
- White Finish
- 90 CRI
- 120V



5/6"

89129-SU

- 14 Watts
- 27K/30K/35K/40K/50K
- 1100 Lumens
- Dimmable
- Aluminum & Plastic Body
- White Lens
- White Finish
- 90 CRI
- 120V



4" Square Retrofit

89278-SU

- 9 Watts
- 4000K
- 700 Lumens
- Dimmable
- White Finish
- 80 CRI
- 120V



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
87802-SU	SF/SDL/SQ/4/12W/95S/120/WH	12	800	27K/30K/35K/40K/50K	50000	WL,DIM	1.0(h) 4.8(w)
87709-SU	SF/SDL/SQ/8/12W/95S/120/WH	12	950	27K/30K/35K/40K/50K	35000	WL,DIM	0.87(h) 6.8(w)
89200-SU	SF/RDL/SQ/4/11W/95S/120/WH	11	750	27K/30K/35K/40K/50K	50000	DL,DIM	3.2(h) 5.0(w)
89129-SU	SF/RDL/SQ/5-6/14W/95S/120/WH	14	1100	27K/30K/35K/40K/50K	50000	WL,DIM	3.6 (h) 7.3(w)

Recessed Downlight Fixture

Round Trim

4"

87792-SU

- Smooth Trim



87790-SU

- Baffle Trim



LED
BUILT-IN

3
YEAR
WARRANTY

SPECIFICATION

- 10 Watts
- 27K/30K/35K/40K/50K
- 700 Lumens
- Dimmable
- Aluminum & Plastic Body
- White Lens
- White Finish
- 90 CRI
- 120V

5/6"

87793-SU

- Smooth Trim



87791-SU

- Baffle Trim



LED
BUILT-IN

3
YEAR
WARRANTY

SPECIFICATION

- 15 Watts
- 27K/30K/35K/40K/50K
- 1100 Lumens
- Dimmable
- Aluminum & Plastic Body
- White Lens
- White Finish
- 90 CRI
- 120V

5/6" Gimbal Head

82084-SU

- 11 Watts
- 27K/30K/35K/40K/50K
- 1100 Lumens
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120V



LED
BUILT-IN

5
YEAR
WARRANTY



2-Axis Gimbal
30° Tilt | 360° Rotation

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
87792-SU	SF/RDL/RDSM/4/10W/95S/120/WH	10	700	27K/30K/35K/40K/50K	35000	WL,DIM	1.9(w) 5.5(d)
87790-SU	SF/RDL/RDBF/4/10W/95S/120/WH	10	700	27K/30K/35K/40K/50K	35000	WL,DIM	1.9(w) 5.5(d)
87793-SU	SF/RDL/RDSM/5-6/14W/95S/120/WH	15	1100	27K/30K/35K/40K/50K	35000	WL,DIM	1.9(w) 7.4(d)
87791-SU	SF/RDL/RDBF/5-6/14W/95S/120/WH	15	1100	27K/30K/35K/40K/50K	35000	WL,DIM	1.9(w) 7.4(d)
82084-SU	SF/GDL/RD/5-6/11W/95S/120/WH	11	1100	27K/30K/35K/40K/50K	50000	WL,DIM	2.9(w) 7.2(d)

Specifications may change without notice. We are not responsible for any typographical errors

Ceiling Flush Mount Fixture

Double Band Trim



OPTIONAL

10"

88489-SU

- 15 Watts
- 1100 Lumens
- Brush Nickel Finish



12"

87812-SU

- 15 Watts
- 1120 Lumens
- Brush Nickel Finish



14"

87813-SU

- 21 Watts
- 1500 Lumens
- Brush Nickel Finish



16"

87796-SU

- 24 Watts
- 1700 Lumens
- Brush Nickel Finish



18"

87797-SU

- 28 Watts
- 1960 Lumens
- Brush Nickel Finish



OPTIONAL BATTERY BACKUP



Available Brush Nickel Finish

SPECIFICATION

- 27K/30K/35K/40K/50K
- Dimmable
- Steel & Acrylic Body
- White Lens
- 90 CRI
- 120V

12"

49056-SU

- 17 Watts
- 1050 Lumens
- Polished Brass Finish



14"

50436-SU

- 21 Watts
- 2000 Lumens
- Polished Brass Finish



16"

50739-SU

- 25 Watts
- 2500 Lumens
- Polished Brass Finish



18"

88339-SU

- 30 Watts
- 3000 Lumens
- Polished Brass Finish



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
88489-SU	SF/DCO/RD/10/15W/95S/120/BN	15	1000	27K/30K/35K/40K/50K	50000	DL,DIM	3.0(h) 10.0(d)
87812-SU	SF/DCO/RD/12/15W/95S/120/BN/V2	15	1120	27K/30K/35K/40K/50K	50000	DL,DIM,T20	2.87(h) 12.0(d)
87813-SU	SF/DCO/RD/14/21W/95S/120/BN/V2	21	1500	27K/30K/35K/40K/50K	50000	DL,DIM	3.75(h) 14.0(d)
87796-SU	SF/DCO/RD/16/24W/95S/120/BN	24	1700	27K/30K/35K/40K/50K	50000	DL,DIM	3.23(h) 16.0(d)
87797-SU	SF/DCO/RD/18/28W/95S/120/BN	28	2400	27K/30K/35K/40K/50K	50000	DL,DIM	4.0(h) 17.75(d)
49056-SU	SF/DCO/RD/12/17W/95S/120/PB	17	1050	27K/30K/35K/40K/50K	50000	DL,DIM	2.87(h) 12.0(d)
50436-SU	SF/DCO/RD/14/21W/95S/120/PB	21	2000	27K/30K/35K/40K/50K	50000	DL,DIM	3.75(h) 14.0(d)
50739-SU	SF/DCO/RD/16/25W/95S/120/PB	25	2500	27K/30K/35K/40K/50K	50000	DL,DIM	4.0(h) 16.0(d)
88339-SU	SF/DCO/RD/18/30W/95S/120/PB	30	3000	27K/30K/35K/40K/50K	50000	DL,DIM	4.0(h) 17.75(d)
49052-SU	SF/DCO/RD/12/36W/95S/120/BK	36	1800	27K/30K/35K/40K/50K	50000	DL,DIM	2.87(h) 12.0(d)

Ceiling Flush Mount & Pendent Fixture

sunlite

Double Band Trim

12" Brush Nickel Finish

87783-SU

12" Black Finish

87784-SU



SPECIFICATION

- 15 Watts
- 30K/40K/50K
- 1050 Lumens
- Dimmable
- Steel & Acrylic Body
- White Lens
- 80 CRI
- 120V

Oval Double Band Surface Mount Fixture

32" Brush Nickel Finish

49176-SU

- 35 Watts
- 30K/40K/50K
- 3000 Lumens
- Dimmable
- Steel & Acrylic Body
- Brushed Nickel Finish
- White Lens
- 80 CRI
- 120-277V



32" Black Finish

49175-SU

- 35 Watts
- 30K/40K/50K
- 3000 Lumens
- Dimmable
- Steel & Acrylic Body
- Black Finish
- White Lens
- 80 CRI
- 120-277V



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
87783-SU	SF/DCO/P/12/15W/83S/120/BN	15	1050	30K/40K/50K	50000	DL,DIM	9.0(w) 12.0(d)
87784-SU	SF/DCO/P/12/15W/83S/120/BK	15	1050	30K/40K/50K	50000	DL,DIM	9.0(w) 12.0(d)
49176-SU	SF/DCO/OVL/32/35W/83S/MV/BN	35	3000	30K/40K/50K	50000	DL,DIM	4.5(h) 18.0(w) 32.5(d)
49175-SU	SF/DCO/OVL/32/35W/83S/MV/BK	35	3000	30K/40K/50K	50000	DL,DIM	4.5(h) 18.0(w) 32.5(d)

Specifications may change without notice. We are not responsible for any typographical errors

SUNLITE.COM CALL 718.768.7000 TOLL-FREE 800.605.BULB

LED Ceiling Flush Mount

5" Round Black Solid Band

50740-SU

- 15 Watts
- 30K/40K/50K
- 1000 Lumens
- Dimmable
- Steel Body
- Glass Frosted Lens
- 80 CRI
- 120V



White Floating Transitional Glass

88676-SU

- 17 Watts
- 1200 Lumen
- 120 Volt
- 15000 Hours
- 4000K



88675-SU

- 3000K

Black

88678-SU

- 17 Watts
- 1200 Lumens
- 120 Volt
- 15000 Hours
- 4000K



13" Decorative Band Trim

87769-SU

- 20 Watts
- 30K/40K/50K
- 1050 Lumens
- Dimmable
- Steel Body
- Glass White Lens
- 80 CRI
- 120V



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
50740-SU	LFX/RND/15W/3SCT/5"/BK	15	1000	30K/40K/50K	50000	DL, DIM	2.0(h) 4.75(d)
88675-SU	LFX/FGF/17W/30K/8"/WH/2PK	17	1200	3000K	15000	DL,DIM	2.0(w) 8.0(d)
88676-SU	LFX/FGF/17W/40K/8"/WH/2PK	17	1200	4000K	15000	DL,DIM	2.0(w) 8.0(d)
88678-SU	LFX/FGF/17W/40K/8"/BK/2PK	17	1200	4000K	15000	DL,DIM	2.0(w) 8.0(d)
87769-SU	LFX/DCO/13"/20W/SCT/BK	20	1050	30K/40K/50K	50000	DL,DIM	3.0(w) 13.0(d)

Octagonal Design

81328-SU

- 12 Watts
- 650 Lumens
- 30K/40K/50K
- Aluminum & Steel Body
- Frosted Glass Lens
- Black Finish
- 80 CRI



13" Square

81042-SU

- 20 Watts
- 1000 Lumens
- 30K/40K/50K
- Dimmable
- Steel Body
- Frosted Lens
- Black Finish
- 80 CRI



13" Round

81045-SU

- 20 Watts
- 1000 Lumens
- 30K/40K/50K
- Dimmable
- Steel Body
- Frosted Lens
- Black Finish
- 80 CRI



18in Fabric Shade Drum Style

49086-SU

- 30 Watts
- 1680 Lumens
- 27K/30K/35K/40K/50K



13in

49161-SU

- 20 Watts
- 1100 Lumens
- 30K/40K/50K



SPECIFICATION

- Dimmable
- Steel & Acrylic Body
- White Lens
- 80 CRI
- 120V

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
49161-SU	LFX/FD/13"/20W/3SCT/BN	20	1100	30K/40K/50K	35000	DL,DIM	5.0(w) 13.0(d)
49086-SU	LFX/FD/17.5/28W/DIM/BN/SCT	28	1680	27K/30K/35K/40K/50K	35000	DL,DIM	5.0(w) 17.0(d)
81328-SU	LFX/PYR/12W/3SCT/BK	12	650	30K/40K/50K	50000	DL	5.0(h) 10.3(w) 10.3(d)
81042-SU	LFX/DDS/13"/20W/SCT/BK/GD	20	1000	30K/40K/50K	50000	DL,DIM	4.0(h)13.0(w) 13.0(d)
81045-SU	LFX/DDR/13"/20W/SCT/BK/GD	20	1000	30K/40K/50K	50000	DL,DIM	4.0(h)13.0(d)

Ceiling Mount

Semi-Flush Mount Drum Ceiling Fixture

90166-SU

- Wall Mount
- 120 volts
- Medium (E26) Base
- White Fabric Body
- ETL Listed
- Bulb Not Included



90167-SU

- Gray Fabric Body



BULB
REQUIRED

BULB SUGGESTION



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
90166-SU	FIX/FD/E26/WH	-	White Fabric	1	40	7.87(h) 11.81(d)
90167-SU	FIX/FD/E26/GR	-	Grey Fabric	1	40	7.87(h) 11.81(d)

Mushroom & Solid Band

11" Surface Mount Mushroom Fixture

87747-SU

- 15 Watts
- 27K/30K/35K/40K/50K
- 1050 Lumens



15"

87749-SU

- 25 Watts
- 27K/30K/35K/40K/50K
- 1750 Lumens



13"

87748-SU

- 21 Watts
- 27K/30K/35K/40K/50K
- 1450 Lumens



19"

49120-SU

- 24/28/32 Watts
- 30K/40K/50K
- 2240/1960/1680 Lumens



SPECIFICATION

- Dimmable
- Plastic Body
- White Lens
- 90 CRI
- 120-277V

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
87747-SU	SF/MU/RD/11/15W/95S/MV/WH	15	1050	27K/30K/35K/40K/50K	50000	DL,DIM	3.9(h) 11.1(d)
87748-SU	SF/MU/RD/13/21W/95S/MV/WH	21	1450	27K/30K/35K/40K/50K	50000	DL,DIM	4.6(h) 14.0(d)
87749-SU	SF/MU/RD/15/25W/95S/MV/WH	25	1750	27K/30K/35K/40K/50K	50000	DL,DIM	4.6(h) 15.16(d)
49120-SU	SF/MU/RD/19/MW/93S/MV/WH	24/28/32	2240/1960/1680	30K/40K/50K	50000	DL,DIM	4.1(h) 19(d)

13" Double Band Trim With Extended Lens

82001-SU

- 20 Watts
- 1000 Lumens



18"

87786-SU

- 25 Watts
- 1500 Lumens



SPECIFICATION

- 30K/40K/50K
- Dimmable
- Steel & Acrylic Body
- Brushed Nickel Finish
- 80 CRI
- 100-277V

10" Solid Band Trim Fixture

87767-SU

- 15 Watts
- 27K/30K/35K/40K/50K
- 1050 Lumens



13"

87768-SU

- 21 Watts
- 27K/30K/35K/40K/50K
- 1450 Lumens



SPECIFICATION

- Dimmable
- Plastic Body
- White Lens
- 80 CRI
- 120V

13" Round Glass Trim

49154-SU

- 20 Watts
- 1000 Lumens



11" Square Glass Trim

49096-SU

- 20 Watts
- 1000 Lumens



SPECIFICATION

- 30K/40K/50K
- Dimmable
- Steel & Acrylic Body
- White Lens
- Brushed Nickel Finish
- 81 CRI
- 120V

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
82001-SU	SF/DFM/RD/13/20W/83S/MV/BN	20	1400	30K/40K/50K	50000	DL,DIM	4.0(w) 13.0(d)
87786-SU	SF/DFM/RD/18/25W/83S/MV/BN	25	1500	30K/40K/50K	50000	DL,DIM	4.0(w) 17.0(d)
87767-SU	SF/SCF/RD/10/15W/85S/120/BN	15	1050	27K/30K/35K/40K/50K	50000	DL,DIM	2.2(w) 10.0(d)
87768-SU	SF/SCF/RD/13/21W/85S/120/BN	21	1450	27K/30K/35K/40K/50K	50000	DL,DIM	2.2(w) 13.0(d)
49154-SU	SF/GL/RD/13/20W/85S/120/BN	20	1000	27K/30K/35K/40K/50K	50000	DL,DIM	2.5(w) 13.37(d)
49096-SU	SF/GL/SQ/11/20W/85S/120/BN	20	1000	27K/30K/35K/40K/50K	50000	DL,DIM	3.0(w) 11.0(d)

Ceiling Flush Mount Fixture

Decorative

13" Alabaster Glass Lens

87785-SU

- 20 Watts
- 1200 Lumens
- 30K/40K/50K
- Dimmable
- Metal & Glass Body
- Alabaster Lens
- Brushed Nickel Finish
- 90 CRI
- 120V



15"

87778-SU

- 25 Watts
- 1610 Lumens
- 30K/40K/50K
- Dimmable
- Metal & Glass Body
- Alabaster Lens
- Brushed Nickel Finish
- 90 CRI
- 120V



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
87785-SU	LFX/DBN13/20W/BN/AL/SCT	20	1200	30K/40K/50K	50000	DL,DIM	4.8(w) 13.0(d)
87778-SU	LFX/DBN15/25W/BN/AL/SCT	25	1610	30K/40K/50K	50000	DL,DIM	4.8(w) 15.0(d)

11" Alabaster Lens

04587-SU

- 120 volts
- Med (E26) Base
- Uses A19 Bulb(s)
- Metal & Glass Body
- UL Listed



13"

04588-SU



**BULB
REQUIRED**

BULB SUGGESTION



11" Alabaster Lens

46075-SU

- 120 volts
- Med (E26) Base
- Uses A19 Bulb(s)
- Metal & Glass Body
- UL Listed



15"

46078-SU



**BULB
REQUIRED**

BULB SUGGESTION



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
04587-SU	DBN11/AL	Brushed Nickel	Alabaster Glass	2	60	5.3(w) 11.3(d)
04588-SU	DBN13/AL	Brushed Nickel	Alabaster Glass	2	60	5.3(w) 13.3(d)
46075-SU	DDB13/AL	Distressed Brown	Alabaster Glass	2	60	5.8(w) 13.3(d)
46078-SU	DDB15/AL	Distressed Brown	Alabaster Glass	3	60	5.5(w) 15.3(d)

Ceiling Flush Mount Fixture

Decorative

16" Brush Nickle with Alabaster Lens

50156-SU

- 120 volts
- Med (E26) Base
- Uses A19 Bulb(s)
- Metal & Glass Body
- UL Listed



**BULB
REQUIRED**

BULB SUGGESTION



11" Polished Brass with Clear Lens

04572-SU



13"

04580-SU



**BULB
REQUIRED**

11" Polished Brass with Frosted Lens

04574-SU



13"

04582-SU



11" Smooth White with Frosted Lens

04578-SU



13"

04586-SU



SPECIFICATION

- 120 volts
- Med (E26) Base
- Uses A19 Bulb(s)
- Metal & Glass Body
- UL Listed

BULB SUGGESTION



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
50156-SU	DBN16	Brushed Nickel	Alabaster Glass	3	60	6.0(w) 15.75(d)
04572-SU	DBS11/CL	Polished Brass	Clear Glass	2	60	5.3(w) 11.3(d)
04580-SU	DBS13/CL	Polished Brass	Clear Glass	2	60	6.3(w) 13.0(d)
04574-SU	DBS11/FR	Polished Brass	Frosted Glass	2	60	6.0(w) 11.0(d)
04582-SU	DBS13/FR	Polished Brass	Frosted Glass	2	60	6.0(w) 13.3(d)
04578-SU	DWS11/FR	Smooth White	Frosted Glass	2	60	5.3(w) 11.5(d)
04586-SU	DWS13/FR	Smooth White	Frosted Glass	2	60	6.3(w) 13.0(d)

Specifications may change without notice. We are not responsible for any typographical errors

Ceiling Flush Mount Fixture

Round Slim

SUNLITE.COM CALL 718.768.7000 TOLL-FREE 800.605.BULB

5"

85671-SU

- 10 Watts
- 27K/30K/35K/40K/50K
- 700 Lumens
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120V





OPTIONAL ADDONS



Black Trim
50206-SU

7"

85672-SU

- 15 Watts
- 27K/30K/35K/40K/50K
- 1100 Lumens
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120V





OPTIONAL ADDONS



Emergency Battery
81269-SU

Black Trim
50208-SU

9"

81286-SU

- 18 Watts
- 27K/30K/35K/40K/50K
- 1100 Lumens
- Dimmable
- Aluminum Body
- Frosted Lens
- White Finish
- 90 CRI
- 120V





11"

85674-SU

- 21 Watts
- 27K/30K/35K/40K/50K
- 2000 Lumens
- Dimmable
- Aluminum Body
- Frosted Lens
- White Finish
- 90 CRI
- 120V





Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
85671-SU	SF/MP/RD/5/10W/95S/120/WH	10	700	27K/30K/35K/40K/50K	50000	DL,DIM	0.6(w) 5.5(d)
85672-SU	SF/MP/RD/7/15W/95S/120/WH	15	1100	27K/30K/35K/40K/50K	50000	DL,DIM	0.6(w) 9.0(d)
81286-SU	SF/MP/RD/9/18W/95S/120/WH	18	1100	27K/30K/35K/40K/50K	50000	DL,DIM	0.63(w) 9.0(d)
85674-SU	SF/MP/RD/11/21W/95S/120/WH	21	2000	27K/30K/35K/40K/50K	50000	DL,DIM	0.7(w)11.0(d)

Ceiling Flush Mount Fixture

Square Slim & Motion Closet

5" Slim Square Surface Mount Fixture

81283-SU

- 10 Watts
- 600 Lumens



9"

81287-SU

- 18 Watts
- 1200 Lumens



SPECIFICATION

- 27K/30K/35K/40K/50K
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120V

5" Motion Closet Light

81325-SU

- 10 Watts
- 27K/30K/35K/40K/50K
- 700 Lumens



8"

81327-SU

- 13 Watts
- 27K/30K/35K/40K/50K
- 1000 Lumens



SPECIFICATION

- 27K/30K/35K/40K/50K
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120V

12"

81329-SU

- 18 Watts
- 27K/30K/35K/40K/50K
- 1400 Lumens



On/Off / Bi-Level Sensor



SCT Switch

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
81283-SU	SF/MP/SQ/5/10W/95S/120/WH	10	600	27K/30K/35K/40K/50K	50000	DL_DIM	0.6(w) 7.4(d)
81287-SU	SF/MP/SQ/9/18W/95S/120/WH	18	1200	27K/30K/35K/40K/50K	50000	DL_DIM	0.6(h) 9.0(d)
81325-SU	SF/MP/RD/5/12W/95S/120/WH/MS	12	700	27K/30K/35K/40K/50K	50000	DL_DIM	0.9(w) 5.7(d)
81327-SU	SF/MP/RD/8/13W/95S/120/WH/MS	13	1000	27K/30K/35K/40K/50K	50000	DL_DIM	0.9(w) 8.2(d)
81329-SU	SF/MP/RD/12/18W/95S/120/WH/MS	18	1400	27K/30K/35K/40K/50K	50000	DL_DIM	0.9(w) 12.1(d)

Ceiling Flush Mount Fixture

11" Mushroom Solid Band Trim

87765-SU

- 15 Watts
- 1050 Lumens



13"

87766-SU

- 21 Watts
- 1450 Lumens



SPECIFICATION

- 27K/30K/35K/40K/50K
- Dimmable
- Plastic Body
- White Lens
- 80 CRI
- 120V

7" Solid Band Slim Design

88312-SU

- 15 Watts
- 27K/30K/35K/40K/50K
- 950 Lumens
- Brushed Nickel Finish
- 120V



7"

88698-SU

- 15 Watts
- 30K/40K/50K
- 1000 Lumens
- Black Finish
- 80 CRI



SPECIFICATION

- Dimmable
- Plastic Body
- White Lens
- 120V

6" Slim Disc Light

87798-SU

- 10 Watts
- 650 Lumens



7"

87799-SU

- 15 Watts
- 950 Lumens



SPECIFICATION

- 27K/30K/35K/40K/50K
- Dimmable
- Plastic Body
- White Lens
- 90 CRI
- 120V



E26 Restrofit Kit and Recessed Housing Included

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
87765-SU	SF/AM/RD/11/15W/85S/120	15	1050	27K/30K/35K/40K/50K	50000	DL,DIM	3.3(w) 10.0(d)
87766-SU	SF/AM/RD/21/21W/85S/120	21	1450	27K/30K/35K/40K/50K	50000	DL,DIM	3.6(w) 13.0(d)
88312-SU	SF/DCO/MINI/7/15W/95S/120/BN	15	950	27K/30K/35K/40K/50K	50000	DL,DIM	1.3(w) 7.4(d)
88698-SU	SF/DCO/MINI/7/15W/83S/120/BK	15	1000	30K/40K/50K	50000	WL,DIM	1.3(w) 7.4(d)
87798-SU	SF/DISC/6/10W/95S/WH	10	650	27K/30K/35K/40K/50K	50000	WL,DIM	1.29(h) 5.47(d)
87799-SU	SF/DISC/7/15W/95S/WH/V2	15	950	27K/30K/35K/40K/50K	50000	WL,DIM	1.34(h) 7.28(d)

Cylinder

90161-SU

- Surface Mount
- 120 volts
- Medium (E26) Base
- Black finish
- Metal Body
- ETL Listed
- Bulb Not Included



**BULB
REQUIRED**

Cube

90159-SU

- Surface Mount
- 120 volts
- GU10 Base
- Metal Body
- ETL Listed
- Bulb Not Included



**BULB
REQUIRED**

Mushroom

04490-SU

- Surface Mount
- 120 volts
- Med (E26)
- Uses CFL / LED Bulb(s)
- Metal & Glass Body
- UL Listed
- Bulb Not Included



**BULB
REQUIRED**

Socket

46071-SU

- Surface Mount
- 120 volts
- Medium (E26) Base
- Metal Body
- UL Listed
- Bulb Not Included



**BULB
REQUIRED**

Fluorescent Circline

04390-SU

- Surface Mount
- 120 volts
- 4-Pin Base
- Uses FC8T9 Bulb
- UL Listed
- Bulb Not Included



**BULB
REQUIRED**

BULB SUGGESTION



T9 Circline

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
90161-SU	FIX/1LT/BK/E26	Black	-	1	60	7.0(h) 5.0(d)
90159-SU	FIX/CUBE/GU10/BK	Black	-	1	50	4.0(h) 4.0(w) 4.0(d)
04490-SU	HALL6/WH	White	White Glass	1	60	5.0(w) 6.0(d)
46071-SU	FIX/LH/E26/BK/5"	Black	-	1	60	2.8(h) 5.0(d)
04390-SU	32/CR	Chrome	-	1	32	3.5(w) 12.3(d)

LED Adjustable Track Light

4 Lights

81146-SU

- 23 Watt
- 1200 Lumen
- 3000K
- Dimmable
- Chrome finish
- 80 CRI
- 120 Volt



Arms can be rotate 330°



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
81146-SU	LFX/TRL/4H/23W/30K/CH	23	1200	120	3000K	50000	DL,DIM	7.0(h) 4.8(w) 32.0(d)

LED Pendant Fixture

Glass Shade



Juneau

88715-SU

- 9 Watts
- 600 Lumens
- 120 Volt
- 50000 Hours
- 30K/40K/50K



Venice

88710-SU

- 9 Watts
- 800 Lumens
- 120 Volt
- 35000 Hours
- 3000K



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
88715-SU	LFX/DSG/PD/9W/3SCT/JUN	9	600	120	30K/40K/50K	50000	DL,DIM	11.0(w) 4.8(d)
88710-SU	LFX/DSG/PD/D/9W/VENICE	9	800	120	3000K	35000	DL,DIM	9.0(w) 4.8(d)

Pendant Fixture

Antique Style

**BULB
REQUIRED**



07016-SU



07008-SU



07009-SU



07005-SU



07006-SU



07011-SU



07014-SU

SPECIFICATION

- 120 volts
- Medium (E26) Base
- Metal Body
- ETL Listed
- Bulbs Not Included

BULB SUGGESTION



Black and Copper

07028-SU

- 120 volts
- Medium (E26) Base
- Metal Body
- UL Listed
- Bulb Not Included



**BULB
REQUIRED**

BULB SUGGESTION



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
07016-SU	AQF/PD/CN10/AB/FLA	Antique Brass	-	1	40	4.5(w) 10.5(d)
07008-SU	AQF/PD/CN10/AB	Antique Bronze	-	1	60	6.5(w) 10.0(d) 48 Cord
07009-SU	AQF/PD/SCN10/OB/AB	Antique Bronze	-	1	60	6.3(w) 10.0(d) 72 Cord
07005-SU	AQF/PD/CN10/CG/OB	Oil Black	Clear Glass	1	60	11.5(w) 10.7(d) 68 Cord
07006-SU	AQF/PD/OCG/OB/CB	Vintage Oil Bronze	-	1	60	11.8(w) 6.5(d) 42 Cord
07011-SU	AQF/PD/CGC/IR	Iron Rust	-	1	60	10.6(w) 5.7(d) 42 Cord
07014-SU	AQF/PD/CG/WH	White	-	1	40	8.3(w) 4.3(d) 72 Cord

Specifications may change without notice. We are not responsible for any typographical errors

Pendant Fixture

Modern Style

80758-SU

- 120 volts
- Medium (E26) Base
- Blue Plastic Body
- Only Lamp holder
- 42" Cord



80759-SU

- 120 volts
- Medium (E26) Base
- Pink Plastic Body
- Only Lamp holder
- 42" Cord



**BULB
REQUIRED**

BULB SUGGESTION



G25
Med E26



G19
Med E26

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
80758-SU	CO/PD/BL	Blue	-	1	40	4.0(w) 1.8(d)
80759-SU	CO/PD/PK	Pink	-	1	40	4.0(w) 1.8(d)

80767-SU

- 15 Watt
- 1250 Lumen
- 120 Volt
- 25000 Hours
- 3000K



80763-SU

- 7 Watt
- 550 Lumen



**LED
BUILT-IN**

80765-SU

- 11 Watt
- 800 Lumen



80764-SU

- Blue
- 11 Watt
- 800 Lumen



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
80767-SU	UFO/LED/15W/30K/PINK	15	1250	120	3000K	25000	DL	5.3(d)
80765-SU	UFO/LED/11W/30K/PINK	11	800	120	3000K	25000	DL	4.7(d)
80763-SU	UFO/LED/7W/30K/PINK	7	550	120	3000K	25000	DL	3.7(d)
80764-SU	UFO/LED/11W/30K/BLUE	11	800	120	3000K	25000	DL	3.7(d)

Pendant Fixture

46058-SU

- 120 volts
- Medium (E26) Base
- Metal Body
- Matte Black Finish
- ETL Listed
- Bulb Not Included



46057-SU

- Brushed Nickel Finish



BULB SUGGESTION



G25
Med E26



A19
Med E26

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
07028-SU	PD/IC/7	Matte Black	-	1	60	16.0(w) 7.3(d) 74 Cord
46058-SU	FIX/PRS/E26/BK	Matte Black	-	1	60	52 (h) 8 (d)
46057-SU	FIX/PRS/E26/BN	Brushed Nickel	-	1	60	52 (h) 8 (d)

LED Module Retrofit Kit

AC Light Engine



3"

88458-SU

- 10 Watts
- 1000 Lumens
- 30K/40K/50K
- Dimmable
- Metal & Plastic Body
- Clear Lens
- White Finish
- 90 CRI
- 120V



4"

88476-SU

- 17 Watts
- 1050 Lumens
- 27K/30K/40K/50K
- Dimmable
- Metal & Plastic Body
- Clear Lens
- White Finish
- 90 CRI
- 120V



5"

88281-SU

- 20 Watts
- 2800 Lumens
- 27K/30K40K/50K/65K
- Dimmable
- Metal & Plastic Body
- Clear Lens
- White Finish
- 90 CRI
- 120V



6.5"

88282-SU

- 25 Watts
- 2500 Lumens
- 27K/30K40K/50K/65K
- Dimmable
- Metal & Plastic Body
- Clear Lens
- White Finish
- 90 CRI
- 120V



6.5"

88283-SU

- 30 Watts
- 3000 Lumens
- 27K/30K40K/50K/65K
- Dimmable
- Metal & Plastic Body
- Clear Lens
- White Finish
- 90 CRI
- 120V



7.3"

88479-SU

- 24 Watts
- 1800 Lumens
- 30K/40K/50K
- Dimmable
- Metal & Plastic Body
- Clear Lens
- White Finish
- 90 CRI
- 120V



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
88458-SU	MODULE/LED/3"/10W/3SCT/AC	10	1000	120	30K/40K/50K	50000	DL,DIM	3.0(d)
88476-SU	MODULE/LED/4"/17W/5SCT	17	1050	120	27K/30K40K/50K	25000	DL,DIM	0.8(h) 4.4(w) 4.4(d)
88281-SU	MODULE/LED/5"/20W/SCT/AC	20	2000	120	27K/30K40K/50K/65K	50000	DL,DIM	5.0(d)
88282-SU	MODULE/LED/6.5"/25W/SCT/AC	25	2500	120	27K/30K40K/50K/65K	50000	DL,DIM	6.5(d)
88283-SU	MODULE/LED/6.5"/30W/SCT/AC	30	3000	120	27K/30K40K/50K/65K	50000	DL,DIM	6.5(d)
88479-SU	MODULE/LED/7.3"/15W/SCT	15	1350	120	30K/40K/50K	50000	DL,DIM	0.55(h) 7.3(w) 7.3(d)

Specifications may change without notice. We are not responsible for any typographical errors

Bathroom Vanity Fixture

Double Band Trim

24"

81491-SU

- 15/20/25 Watts
- 1420/1895/2370 Lumens



36"

81492-SU

- 18/25/30 Watts
- 1820/2530/3035 Lumens



48"

81493-SU

- 28/35/40 Watts
- 2860/3575/4050 Lumens



SPECIFICATION

- 30K/40K/50K
- Dimmable
- Steel & Acrylic Body
- White Lens
- Brushed Nickel Bronze Finish
- 90 CRI
- 120-277V

24"

81371-SU

- 15/20/25 Watts
- 1420/1895/2370 Lumens



36"

81373-SU

- 18/25/30 Watts
- 1820/2530/3035 Lumens



SPECIFICATION

- 30K/40K/50K
- Dimmable
- Steel & Acrylic Body
- White Lens
- Black Finish
- 90 CRI
- 120-277V

*ATO = Contact us about assembled items, inventory, and lead time.

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
81491-SU	SF/VF/24/MW/93S/BN	15/20/25	1420/1895/2370	30K/40K/50K	50000	DL,DIM	4.33(h) 24.2(w) 5.86(d)
90674-SU*	SF/VF/24/MW/93S/BN/EM	15/20/25	1420/1895/2370	30K/40K/50K	50000	DL,DIM	4.33(h) 24.2(w) 5.86(d)
81492-SU	SF/VF/36/MW/93S/BN	18/25/30	1820/2530/3035	30K/40K/50K	50000	DL,DIM	4.33(h) 36.0(w) 5.86(d)
90680-SU*	SF/VF/36/MW/93S/BN/EM	18/25/30	1820/2530/3035	30K/40K/50K	50000	DL,DIM	4.33(h) 36.0(w) 5.86(d)
81493-SU	SF/VF/48/MW/93S/BN	28/35/40	2860/3575/4050	30K/40K/50K	50000	DL,DIM	4.33(h) 47.83(w) 5.86(d)
90686-SU*	SF/VF/48/MW/93S/BN/EM	28/35/40	2860/3575/4050	30K/40K/50K	50000	DL,DIM	4.33(h) 47.83(w) 5.86(d)
81371-SU	SF/VF/24/MW/93S/BK	10/20/25	2200	30K/40K/50K	50000	WL,DIM	4.4(h) 24.0(w) 5.9(d)
90675-SU	SF/VF/24/MW/93S/BK/EM	10/20/25	2200	30K/40K/50K	50000	WL,DIM	4.4(h) 24.0(w) 5.9(d)
81373-SU	SF/VF/36/30W/93S/BK	30	2600	30K/40K/50K	50000	WL,DIM	4.3(h) 36.0 (w) 5.9(d)
90681-SU	SF/VF/36/30W/93S/BK/EM	30	2600	30K/40K/50K	50000	WL,DIM	4.3(h) 36.0 (w) 5.9(d)
90687-SU	SF/VF/48/40W/93S/BK/EM	40	3500	30K/40K/50K	50000	WL,DIM	4.3(h) 36.0 (w) 5.9(d)

Bathroom Vanity Fixture

LED Bar



18"

81494-SU

- 15 Watts
- 1200 Lumens



24"

81376-SU

- 20 Watts
- 1600 Lumens



36"

81495-SU

- 25 Watts
- 2000 Lumens



48"

81496-SU

- 30 Watts
- 2400 Lumens



SPECIFICATION

- 30K/40K/50K
- Dimmable
- Steel & Acrylic Body
- White Lens
- Black Finish
- 90 CRI
- 100-277V

18"

81460-SU

- 20 Watts
- 1400 Lumens



24"

81461-SU

- 25 Watts
- 1750 Lumens



36"

81462-SU

- 30 Watts
- 2100 Lumens



SPECIFICATION

- 30K/40K/50K
- Dimmable
- Steel & Acrylic Body
- White Lens
- Brushed Nickel Finish
- 90 CRI
- 100-277V

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
81494-SU	SF/BAR/18/15W/93S/MV/BK	15	1200	30K/40K/50K	50000	DL,DIM	3.25(h) 18.75(w) 4.75(d)
81376-SU	SF/BAR/24/20W/93S/MV/BK	20	1600	30K/40K/50K	50000	DL,DIM	2.5(h) 24.0(w) 4.5(d)
81495-SU	SF/BAR/36/25W/93S/MV/BK	25	2000	30K/40K/50K	50000	DL,DIM	2.5(h)36.0(w) 4.5(d)
81496-SU	SF/BAR/48/30W/93S/MV/BK	30	2400	30K/40K/50K	50000	DL,DIM	3.25(h)48.75(w) 4.75(d)
81460-SU	SF/BAR/24/20W/93S/MV/BN	20	1400	30K/40K/50K	50000	DL,DIM	2.5(h) 18.0(w) 4.5(d)
81461-SU	SF/BAR/36/25W/93S/MV/BN	25	1750	30K/40K/50K	50000	DL,DIM	2.5(h) 24.0(w) 4.5(d)
81462-SU	SF/BAR/48/30W/93S/MV/BN	30	2100	30K/40K/50K	50000	DL,DIM	2.5(h) 36.0(w) 4.5(d)

Specifications may change without notice. We are not responsible for any typographical errors

Bathroom Vanity Fixture

LED Bar

18" Modern Contemporary Vanity



85119-SU


- 15 Watts
- 950 Lumens



24"

85094-SU


- 20 Watts
- 1300 Lumens

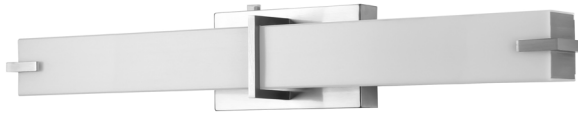

36"

85120-SU

- 30 Watts
- 1950 Lumens

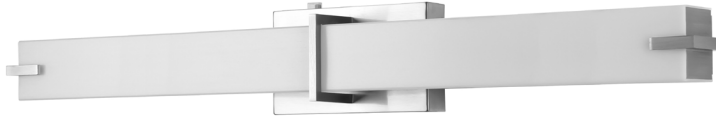

SPECIFICATION

- 30K/40K/50K
- Dimmable
- Metal & Acrylic Body
- White Lens
- Chrome Finish
- 80 CRI
- 120V

18"

81132-SU



SPECIFICATION

- 20 Watts
- 1600 Lumens
- 30K/40K/50K
- Dimmable
- Steel & Acrylic Body
- White Acrylic Lens
- Brushed Nickel Finish
- 80 CRI
- 120V

27"

81031-SU



SPECIFICATION

- 15 Watts
- 1050 Lumens
- 27K/30K/35K/40K/50K
- Dimmable
- Steel & Acrylic Body
- White Acrylic Lens
- Chrome Finish
- 80 CRI
- 120V

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
85119-SU	SF/VF/18/15W/83S/120/BN	15	950	30K/40K/50K	50000	DL,DIM	4.25(h) 18.0(w) 3.5(d)
85094-SU	SF/VF/24/20W/83S/120/BN	20	1300	30K/40K/50K	50000	DL,DIM	4.25(h) 24.0(w) 3.5(d)
85120-SU	SF/VF/36/30W/83S/120/BN	30	1950	30K/40K/50K	50000	DL,DIM	4.25(h) 36.0(w) 3.5(d)
81132-SU	SF/BAR/ACR/18/20W/83S/120/BN	20	1600	30K/40K/50K	50000	DL,DIM	3.5(h) 18.5(w) 4.0(d)
81031-SU	LFX/BAR/REC/2LT/15W/SCT/BN	15	1050	27K/30K/35K/40K/50K	50000	DL,DIM	4.8(h) 27.0(w) 3.0(d)



1 Light Contemporary Design

82111-SU

- 10 Watts
- 650 Lumens



2 Light

82112-SU

- 20 Watts
- 1300 Lumens



3 Light

82113-SU

- 30 Watts
- 1900 Lumens



4 Light

82114-SU

- 40 Watts
- 2300 Lumens



SPECIFICATION

- 30K/40K/50K
- Dimmable
- Steel & Plastic Body
- Frosted Lens
- Brushed Nickel Finish
- 90 CRI
- 120V

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
82111-SU	LFX/VF/1L/10W/90CRI/3SCT/BN	10	650	30K/40K/50K	50000	DL,DIM	3.35(h)6.75(w)4.1(d)
82112-SU	LFX/VF/2L/20W/90CRI/3SCT/BN	20	1300	30K/40K/50K	50000	DL,DIM	3.35(h)14.85(w)4.1(d)
82113-SU	LFX/VF/3L/30W/90CRI/3SCT/BN	30	1900	30K/40K/50K	50000	DL,DIM	3.35(h)23.0(w)4.1(d)
82114-SU	LFX/VF/4L/40W/90CRI/3SCT/BN	40	2300	30K/40K/50K	50000	DL,DIM	3.35(h)31.1(w)4.1(d)
82064-SU	LFX/WS/4L/40W/D/E/30K	40	2400	3000K	50000	DL,DIM	3.35(h)30.7(w)4.1(d)

Bathroom Vanity Light

Classic Style

3 Light

45000-SU

- Brushed Nickel Finish



3 Light

45025-SU

- Chrome Finish



**BULB
REQUIRED**

48" Brushed Nickel Finish

45300-SU

- Brushed Nickel
- E26 Base Base
- 8 Light
- 120 Volt
- 60 Watt Max



48" Chrome Finish

45325-SU

- Chrome



SPECIFICATION

- Wall Mount
- 120 volts
- Medium (E26) Base
- Uses A19 Bulb(s)
- Metal Body
- UL Listed

BULB SUGGESTION



A19
Med E26



G25
Med E26

48" Brushed Nickel Finish

45445-SU

- E26 Base Base
- 6 Light
- 120 Volt
- 60 Watt Max



45430-SU

- 2 Light



**BULB
REQUIRED**

SPECIFICATION

- Wall Mount
- 120 volts
- Medium (E26) Base
- Uses A19 Bulb(s)
- Metal Body
- UL Listed

BULB SUGGESTION



A19
Med E26

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
45000-SU	B318/BN	Brushed Nickel	-	3	60	4.9(h) 2.3(w) 18.0(d)
45025-SU	B318/CH	Chrome	-	3	60	4.9(h) 2.3(w) 18.0(d)
45430-SU	B214/BN/AL	Brushed Nickel	-	2	60	9.5(h) 5.5(w) 14.0(d)
45405-SU	B324U/BN/AL	Brushed Nickel	-	3	60	8.3(h) 5.5(w) 24.0(d)
45445-SU	B648D/BN/AL	Brushed Nickel	-	6	60	9.5(h) 5.5(w) 48.0(d)

Bathroom Vanity Fixture

Decorative Sconces

sunlite

3 Light

45059-SU



4Light

45060-SU



**BULB
REQUIRED**

SPECIFICATION

- Wall Mount
- 120 volts
- Medium (E26) Base
- Uses A19 Bulb(s)
- Metal & Glass Body
- UL Listed

BULB SUGGESTION



1 Light

45055-SU



2 Light

45056-SU



3 Light

45057-SU



4 Light

45058-SU



1 Light

46061-SU



2 Light

46062-SU



3 Light

46063-SU



4 Light

46064-SU



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
45059-SU	FIX/SM/BATH/3LT/E26/BN/WH	Brushed Nickel	White Glass	3	100	8.5(h) 6.0(w) 24.0(d)
45060-SU	FIX/SM/BATH/4LT/E26/BN/WH	Brushed Nickel	White Glass	4	100	8.5(h) 6.0(w) 33.5(d)
45055-SU	FIX/FM/BATH/1LT/E26/BN/FR	Brushed Nickel	Frosted Glass	1	100	7.0(h) 5.5(w) 7.8(d)
45056-SU	FIX/FM/BATH/2LT/E26/BN/FR	Brushed Nickel	Frosted Glass	2	100	7.0(h) 6.3(w) 17.0(d)
45057-SU	FIX/FM/BATH/3LT/E26/BN/FR	Brushed Nickel	Frosted Glass	3	100	7.0(h) 6.3(w) 24.0(d)
45058-SU	FIX/FM/BATH/4LT/E26/BN/FR	Brushed Nickel	Frosted Glass	4	100	7.0(h) 6.3(w) 30.0(d)
46061-SU	FIX/SQ/BATH/1LT/E26/BN/FR	Brushed Nickel	Frosted Glass	1	100	4.3(h) 4.3(w) 4.3(d)
46062-SU	FIX/SQ/BATH/2LT/E26/BN/FR	Brushed Nickel	Frosted Glass	2	100	8.8(h) 5.0(w) 14.0(d)
46063-SU	FIX/SQ/BATH/3LT/E26/BN/FR	Brushed Nickel	Frosted Glass	3	100	8.8(h) 5.0(w) 20.0(d)
46064-SU	FIX/SQ/BATH/4LT/E26/BN/FR	Brushed Nickel	Frosted Glass	4	100	8.8(h) 5.0(w) 25.6(d)

Specifications may change without notice. We are not responsible for any typographical errors

SUNLITE.COM CALL 718.768.7000 TOLL-FREE 800.605.BULB

Bathroom Vanity Fixture

Decorative Sconces

2 Light

45056-SU



3 Light

45057-SU



4 Light

45058-SU



**BULB
REQUIRED**

SPECIFICATION

- Wall Mount
- 120 volts
- Medium (E26) Base
- Uses A19 Bulb(s)
- Metal & Glass Body
- UL Listed

BULB SUGGESTION



1 Light

46061-SU



2 Light

46062-SU



3 Light

46063-SU



4 Light

46064-SU



**BULB
REQUIRED**

SPECIFICATION

- Wall Mount
- 120 volts
- Medium (E26) Base
- Uses A19 Bulb(s)
- Metal & Glass Body
- UL Listed

BULB SUGGESTION



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
45056-SU	FIX/FM/BATH/2LT/E26/BN/FR	Brushed Nickel	Frosted Glass	2	100	7.0(h) 6.3(w) 17.0(d)
45057-SU	FIX/FM/BATH/3LT/E26/BN/FR	Brushed Nickel	Frosted Glass	3	100	7.0(h) 6.3(w) 24.0(d)
45058-SU	FIX/FM/BATH/4LT/E26/BN/FR	Brushed Nickel	Frosted Glass	4	100	7.0(h) 6.3(w) 30.0(d)
46061-SU	FIX/SQ/BATH/1LT/E26/BN/FR	Brushed Nickel	Frosted Glass	1	100	4.3(h) 4.3(w) 4.3(d)
46062-SU	FIX/SQ/BATH/2LT/E26/BN/FR	Brushed Nickel	Frosted Glass	2	100	8.8(h) 5.0(w) 14.0(d)
46063-SU	FIX/SQ/BATH/3LT/E26/BN/FR	Brushed Nickel	Frosted Glass	3	100	8.8(h) 5.0(w) 20.0(d)
46064-SU	FIX/SQ/BATH/4LT/E26/BN/FR	Brushed Nickel	Frosted Glass	4	100	8.8(h) 5.0(w) 25.6(d)

Bathroom Vanity Fixture

Decorative Sconces



1 Light 81319-SU 	2 Light 81320-SU 	3 Light 81321-SU 	BULB REQUIRED	SPECIFICATION
				<ul style="list-style-type: none"> • Wall Mount • 120 volts • Medium (E26) Base • Uses A19 Bulb(s) • Metal Body • UL Listed
				BULB SUGGESTION
				 A19 Med E26

2 Light 81323-SU 	3 Light 81324-SU 	BULB REQUIRED	SPECIFICATION
			<ul style="list-style-type: none"> • Wall Mount • 120 volts • Medium (E26) Base • Uses A19 Bulb(s) • Metal Body • UL Listed
			BULB SUGGESTION
			 A19 Med E26

1 Light 81316-SU 	2 Light 81317-SU 	3 Light 81318-SU 	BULB REQUIRED	SPECIFICATION
				<ul style="list-style-type: none"> • Wall Mount • 120 volts • Medium (E26) Base • Uses A19 Bulb(s) • Metal Body • UL Listed
				BULB SUGGESTION
				 A19 Med E26

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
81319-SU	FIX/VF/1LT/E26/BN/FR	Brushed Nickel	White Glass	1	60	10.0(h) 4.8(w) 5.4(d)
81320-SU	FIX/VF/2LT/E26/BN/FR	Brushed Nickel	White Glass	2	60	10.0(h) 13.0(w) 5.5(d)
81321-SU	FIX/VF/3LT/E26/BN/FR	Brushed Nickel	White Glass	3	60	10.0(h) 22.0(w) 5.5(d)
81323-SU	FIX/VF/2LT/E26/BN/FR	Brushed Nickel	White Glass	2	60	7.0(h) 16.0(w) 6.0(d)
81324-SU	FIX/VF/3LT/E26/BN/FR	Brushed Nickel	White Glass	3	60	7.0(h) 24.0(w) 6.0(d)
81316-SU	FIX/VF/1LT/E26/BN/FR	Brushed Nickel	White Glass	1	60	9.0(h) 5.0(w) 7.0(d)
81317-SU	FIX/VF/2LT/E26/BN/FR	Brushed Nickel	White Glass	2	60	9.0(h) 16.0(w) 7.0(d)
81318-SU	FIX/VF/3LT/E26/BN/FR	Brushed Nickel	White Glass	3	60	9.0(h) 24.0(w) 7.0(d)

Specifications may change without notice. We are not responsible for any typographical errors

SUNLITE.COM CALL 718.768.7000 TOLL-FREE 800.605.BULB

Wall Mount Sconce

3 Lights

46056-SU

- Gu9 Base Base
- 3 Light
- 120 Volt
- 4 Watt Max



BULB
REQUIRED

BULB SUGGESTION



G9
Bi Pin

Steel Swirl

46059-SU

- 120 volts
- G9 Base
- Metal Body
- Polished Nickel Finish
- ETL Listed
- Bulb Not Included



BULB
REQUIRED

BULB SUGGESTION



G9
Bi Pin

Tulip Shade

04530-SU

- E26 Base Base
- 1 Light
- 120 Volt
- 60 Watt Max



BULB
REQUIRED

BULB SUGGESTION



A19 Med E26 G16 Med E26

Antique Style Wall Mount

07038-SU

- Wall Mount
- 120 volts
- Medium (E26) Base
- Metal Body
- UL Listed
- Bulb Not Included



BULB
REQUIRED

Antique Style Wall Mount

07056-SU

- Wall Mount
- 120 volts
- Medium (E26) Base
- Metal Body
- UL Listed
- Bulb Not Included



BULB
REQUIRED

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
46056-SU	FIX/VF/3LT/G9/AB	Black	Glass	3	4	5.0(h) 15.0(w) 5.0(d)
46059-SU	FIX/SWIRL/G9	Brushed Nickel	-	1	4	9.75(h) 4.75(w) 3.75(d)
04530-SU	TUL	Polished Brass	Glass	1	60	7.75(h) 4.5(w) 5.5(d)
07038-SU	AQF/WTP/IR	Black	-	1	60	18.1(h) 4.4(w) 4.6(d)
07056-SU	AQF/OWC/OB	Vintage Oil Bronze	-	1	40	14.2(h) 6.5(w) 8.8(d)

Wall Sconce



85098-SU

85099-SU

85100-SU

85101-SU

SPECIFICATION

- 12 Watts
- 800 Lumens
- 30K/40K/50K
- Dimmable
- Steel & Plastic Body
- White Lens
- Brushed Nickel Finish
- 80 CRI
- 120V

Sconce with Switch

88685-SU

- 6 Watts
- 420 Lumens
- 3000K
- Dimmable
- Aluminum & Steel Body
- White Lens
- Brushed Nickel Finish
- 80 CRI
- 120V



Up / Down Installation



On / Off Switch



Clear Seedy Glass

81033-SU

- 15 Watts
- 1000 Lumens
- 3000K
- Dimmable
- Metal Body
- Clear Seedy Glass
- Brushed Nickel Finish
- 80 CRI
- 120V



Horizontal Installation



Light On



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
85098-SU	LFX/WS/HBN/12W/SCT/BN	12	800	30K/40K/50K	50000	DL,DIM	10.0(h) 5.0(w)
85099-SU	LFX/WS/CRV/12W/SCT/BN	12	800	30K/40K/50K	50000	DL,DIM	10.0(h) 5.0(w)
85100-SU	LFX/WS/SQB/12W/SCT/BN	12	800	30K/40K/50K	50000	DL,DIM	10.0(h) 5.0(w)
85101-SU	LFX/WS/MBN/12W/SCT/BN	12	800	30K/40K/50K	50000	DL,DIM	10.0(h) 5.0(w)
88685-SU	LFX/WS/30K/6W/LT/BN/8"	6	420	3000K	50000	DL,DIM	8.0(h) 4.5(w) 3.8(d)
81033-SU	LFX/WS/SEEDY/2LT/15W/30K/BN	15	1000	3000K	50000	DL,DIM	12.0(h) 5.0(w) 4.0(d)

Wall Mount Sconce

Half Cylinder

49200-SU

- 11/15/23 Watts
- 850/1150/1650 Lumens
- 30K/40K/50K
- Dimmable
- Metal & Plastic Body
- White Lens
- Brushed Nickel
- 90 CRI
- 120V



88679-SU

- 15 Watts
- 1050 Lumens
- 30K/40K/50K
- Dimmable
- Aluminum & Steel Body
- White Glass Lens
- Brushed Nickel
- 90 CRI
- 120V



OPTIONAL

82023-SU

- 15 Watts
- 1050 Lumens
- 30K/40K/50K
- Dimmable
- Aluminum & Plastic Body
- White Lens
- Black Finish
- 81 CRI
- 120V



OPTIONAL

49201-SU

- 12 Watts
- 1050 Lumens
- 30K/40K/50K
- Dimmable
- Aluminum Body
- White Acrylic Lens
- Brushed Nickel
- 90 CRI
- 120V



*ATO = Contact us about assembled items, inventory, and lead time.

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
49200-SU	SF/WS/HC/MW/15W/93S/120/BN	11/15/23	850/1150/1650	30K/40K/50K	50000	DL,DIM	10.5(h) 8.0(w) 3.7(d)
88679-SU	SF/WS/HC/15W/93S/120/BN	15	1050	30K/40K/50K	50000	DL,DIM	10.0(h) 5.0(w)
88694-SU*	SF/WS/HC/15W/93S/120/BN/MS	15	1050	30K/40K/50K	50000	DL,DIM	10.0(h) 5.0(w)
82023-SU	LFX/WS/HC/15W/SCT/BK	15	950	30K/40K/50K	50000	WL,DIM	10.0(h) 7.0(w) 3.0(d)
49201-SU	LFX/HM/12W/CRI90/3SCT/BN	12	840	30K/40K/50K	50000	DL,DIM	5.9(h) 11.8(w) 3.3(d)



Outdoor
Light Fixtures

Outdoor Ceiling Flush Mount Fixture

Pyramid Design

87787-SU



- 12 Watts
- 800 Lumens
- 30K/40K/50K
- Dimmable
- Aluminum Body
- Frosted Lens
- Black Finish
- 80 CRI



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
87787-SU	LFX/OOF/17W/SCT/BK	17	800	30K/40K/50K	50000	WL,DIM	4.75(w) 12(d)

LED Outdoor Wall Mount Series

Porch Lighting

81384-SU



- 12 Watt
- 650 Lumens
- 30K/40K/50K
- Dimmable
- Aluminum Body
- Frosted Lens
- Textured Black Finish
- 80 CRI
- 120V



Porch Lighting

85103-SU



- 12 Watt
- 650 Lumens
- 30K/40K/50K
- Aluminum Body
- White Lens
- Black Finish
- 80 CRI
- 120v



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
81384-SU	LFX/BH/20W/3SCT/BK	20	1000	30K/40K/50K	50000	WL,DIM	3.6(w) 11.0(d)
85103-SU	LFX/BH/12W/SCT/BK	12	650	30K/40K/50K	50000	WL	11.8(h)7.4(w) 3.7(d)

82023-SU

- 15 Watts
- 1050 Lumens
- 30K/40K/50K
- Dimmable
- Aluminum & Plastic Body
- White Lens
- Black Finish
- 81 CRI
- 120V



LED BUILT-IN 5 YEAR WARRANTY BATTERY BACKUP MOTION SENSOR
OPTIONAL

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
82023-SU	LFX/WS/HC/15W/SCT/BK	15	950	30K/40K/50K	50000	WL_DIM	10.0(h) 7.0(w) 3.0(d)
90668-SU*	LFX/WS/HC/15W/SCT/BK/EM	15	950	30K/40K/50K	50000	WL_DIM	10.0(h) 7.0(w) 3.0(d)
90667-SU*	LFX/WS/HC/15W/SCT/BK/MS	15	950	30K/40K/50K	50000	WL_DIM	10.0(h) 7.0(w) 3.0(d)

Vintage Style

12"

81434-SU

- 15 Watts
- 800 Lumens



18"

81435-SU

- 20 Watts
- 1000 Lumens



24"

81436-SU

- 23 Watts
- 1200 Lumens



30"

91167-SU

- 28 Watts
- 1400 Lumens



LED BUILT-IN 5 YEAR WARRANTY BATTERY BACKUP
OPTIONAL

SPECIFICATION

- 28 Watts
- 1400 Lumens
- 30K/40K/50K
- Metal Body
- Acrylic White Lens
- Black / Bronze Finish
- 80 CRI

*ATO = Contact us about assembled items, inventory, and lead time.

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
81434-SU	SF/WS/AQ/12/15W/83S/MV/BK	15	800	100-277	30K/40K/50K	50000	WL	12.0(h) 6.0(w) 4.0(d)
90501-SU*	SF/WS/AQ/12/15W/83S/MV/BK/EM	15	800	100-277	30K/40K/50K	50000	WL	12.0(h) 6.0(w) 4.0(d)
81435-SU	SF/WS/AQ/18/20W/83S/MV/BK	20	1000	100-277	30K/40K/50K	50000	WL	18.0(h) 6.0(w) 4.0(d)
90502-SU*	SF/WS/AQ/18/20W/83S/MV/BK/EM	20	1000	100-277	30K/40K/50K	50000	WL	18.0(h) 6.0(w) 4.0(d)
81436-SU	SF/WS/AQ/24/23W/83S/MV/BK	23	1200	100-277	30K/40K/50K	50000	WL	24.0(h) 6.0(w) 4.0(d)
90505-SU*	SF/WS/AQ/24/23W/83S/MV/BK/EM	23	1200	100-277	30K/40K/50K	50000	WL	24.0(h) 6.0(w) 4.0(d)
91167-SU	SF/WS/AQ/30/28W/83S/MV/BK	28	1400	100-277	30K/40K/50K	50000	WL	30.0(h) 6.0(w) 4.0(d)
90506-SU*	SF/WS/AQ/30/28W/83S/MV/BK/EM	28	1400	100-277	30K/40K/50K	50000	WL	30.0(h) 6.0(w) 4.0(d)

Specifications may change without notice. We are not responsible for any typographical errors

Outdoor Wall Mount Sconce

47040-SU

- 120 volts
- Med (E26)
- Metal & Glass Body
- UL Listed



47000-SU



**BULB
REQUIRED**

BULB SUGGESTION



41370-SU

- Wall Mount
- 120 volts
- Medium (E26) Base
- Uses A19 Bulb
- Polycarbonate Body
- UL Listed–Wet Location



41367-SU



**BULB
REQUIRED**

BULB SUGGESTION



Black Buckhead

47020-SU

- 120 volts
- Medium (E26) Base
- Metal & Glass Body
- UL Listed



White Buckhead

47030-SU



**BULB
REQUIRED**

BULB SUGGESTION



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
47040-SU	ODI1040/BK/E26	Black	Clear Glass	1	100	7.5(h) 4.5(w) 5.8(d)
47000-SU	ODI1000/BK/E26	Black	White Glass	1	60	7.7(h) 6.0(w) 6.7(d)
41370-SU	DOD/NC/BK/CL/MED	Black	White Acrylic	1	60	13.0(h) 11.0(w) 10.1(d)
41367-SU	DOD/NC/WH/CL/MED	White	White Acrylic	1	60	11.0(h) 11.0(w) 10.1(d)
47020-SU	ODI1020/BK	Black	Frosted Glass	1	100	8.2(h) 5.0 (w) 4.1(d)
47030-SU	ODI1030/WH	White	Frosted Glass	1	100	8.7(h) 4.1(w) 4.4(d)

LED Outdoor Gooseneck Fixture Wall Mount



81315-SU

- 12 Watts
- 700 Lumens
- 3000K
- Dimmable
- Steel Body
- Matte Black Finish
- 80 CRI



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
81315-SU	LFX/GN/12W/30/BK	12	700	120	3000K	50000	WL,DIM	12.0(w) 15.0(d)

Outdoor Gooseneck Fixture

46067-SU

- 120 volts
- Medium (E26) Base
- Uses A19 Bulb(s)
- Metal Body
- Black Finish
- UL Listed–Wet Location
- Bulb Not Included



**BULB
REQUIRED**

BULB SUGGESTION



46069-SU

- Red Finish



46068-SU

- White Finish



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
46067-SU	FIX/GN/E26/BLACK	Black	-	1	60	11.5(h) 12.0(w) 15.0(d)
46069-SU	FIX/GN/E26/RED	Red	-	1	60	11.5(h) 12.0(w) 15.0(d)
46068-SU	FIX/GN/E26/WHITE	White	-	1	60	11.5(h) 12.0(w) 15.0(d)

Outdoor Wall Mount Sconce

Vintage Style with Built-in Photocell

SUNLITE.COM CALL 718.768.7000 TOLL-FREE 800.605.BULB

88682-SU



- 12 Watts
- 800 Lumens
- 30K/40K/50K
- Aluminum & Steel Body
- White Lens
- Black Finish
- Built-in Photocell
- 80 CRI



88686-SU



- 12 Watts
- 800 Lumens
- 30K/40K/50K
- Aluminum & Steel Body
- White Lens
- Black Finish
- Built-in Photocell
- 80 CRI



88680-SU



- 12 Watts
- 800 Lumens
- 30K/40K/50K
- Aluminum & Steel Body
- White Lens
- Black Finish
- Built-in Photocell
- 80 CRI



88681-SU



- 12 Watts
- 800 Lumens
- 30K/40K/50K
- Aluminum & Steel Body
- White Lens
- Black Finish
- Built-in Photocell
- 80 CRI



88683-SU



- 12 Watts
- 800 Lumens
- 30K/40K/50K
- Aluminum & Steel Body
- White Lens
- Black Finish
- Built-in Photocell
- 80 CRI



88687-SU



- 9 Watts
- 800 Lumens
- 30K/40K/50K
- Aluminum & Steel Body
- White Lens
- Black Finish
- Built-in Photocell
- 80 CRI



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
88682-SU	LFX/WS/SCT/HC/12W/BK/PC	12	800	120	30K/40K/50K	50000	WL	10.0(h) 10.3(w) 4.0(d)
88686-SU	LFX/WS/SCT/RT/12W/TG/BK/PC	12	800	120	30K/40K/50K	50000	WL	9.4(h) 8.5(w) 5.0(d)
88680-SU	LFX/WS/SCT/HH/12W/BK/PC	12	800	120	30K/40K/50K	50000	WL	12.1(h) 8.0(w) 5.7(d)
88681-SU	LFX/WS/SCT/HO/12W/BK/PC	12	800	120	30K/40K/50K	50000	WL	9.8(h) 7.8(w) 4.1(d)
88683-SU	LFX/WS/SCT/RT/12W/SG/BK/PC	12	800	120	30K/40K/50K	50000	WL	9.5(h) 8.0(w) 4.5(d)
88687-SU	LFX/WS/SCT/LN/9W/BK/PC	9	600	120	30K/40K/50K	50000	WL	11.8(h) 6.1(w) 8.1(d)

Outdoor Wall Mount Sconce


Vintage Style



88684-SU

LED BUILT-IN **5 YEAR WARRANTY**

- 12 Watts
- 800 Lumens
- 30K/40K/50K
- Aluminum & Steel Body
- White Lens
- Black Finish
- 80 CRI
- 120V



88688-SU

LED BUILT-IN **5 YEAR WARRANTY**

- 9 Watts
- 600 Lumens
- 30K/40K/50K
- Aluminum & Steel Body
- White Lens
- Black Finish
- 80 CRI
- 120V



Wall Lantern Design

81300-SU

LED BUILT-IN **5 YEAR WARRANTY**

- 9 Watts
- 900 Lumens
- 30K/40K/50K
- Aluminum & Steel Body
- Glass Clear Lens
- Black Finish
- 80 CRI
- 120V



Wall Lantern Design

49026-SU **49025-SU**

LED BUILT-IN **5 YEAR WARRANTY**

- 15 Watts
- 500 Lumens
- Steel Body
- Amber Lens
- Copper Bronze Finish
- 81 CRI
- 12 Watts
- 400 Lumens



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
88684-SU	LFX/WS/SCT/LN/12W/BK	12	800	120	30K/40K/50K	50000	WL	8.7(h) 8.8(w) 10.3(d)
88688-SU	LFX/WS/SCT/HCL/9W/GL/BK	9	600	120	30K/40K/50K	50000	WL	9.8(h) 7.3(w) 3.7(d)
81300-SU	LFX/WS/CL/9W/MV/SCT/BK	9	900	120	30K/40K/50K	50000	WL	13.8(h) 7.3(w) 9.5(d)
49025-SU	LFX/DOD/L/6/12W/30K	12	400	120	3000K	35000	WL	12.5(h) 6.0(w) 7.5(d)
49026-SU	LFX/DOD/L/8/15W/30K	15	500	120	3000K	35000	WL	16.0(h) 4.5(w) 9.0(d)
49025-SU	LFX/DOD/L/6/12W/30K	12	400	120	3000K	35000	WL	12.5(h) 6.0(w) 7.5(d)
49026-SU	LFX/DOD/L/8/15W/30K	15	500	120	3000K	35000	WL	16.0(h) 4.5(w) 9.0(d)

Specifications may change without notice. We are not responsible for any typographical errors

Outdoor Wall Mount Sconce

Contemporary Style

8"

88673-SU

- 12 Watts
- 600 Lumens



8"

81480-SU

- 12 Watts
- 600 Lumens



14"

81481-SU

- 20 Watts
- 1100 Lumens



14"

81482-SU

- 20 Watts
- 1100 Lumens



SPECIFICATION

- 30K/40K/50K
- Metal Body
- White Lens
- 80 CRI
- 120-277V

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
88673-SU	LFX/CONT/WS/8"/12W/SCT/ORB/ACRY	12	600	30K/40K/50K	50000	WL	8.0(h) 6.0(w) 4.0(d)
81480-SU	LFX/CONT/WS/8"/12W/SCT/SL/ACRY	12	600	30K/40K/50K	50000	WL	8.0(h) 6.0(w) 4.0(d)
81481-SU	LFX/CONT/WS/14"/20W/SCT/ORB/ACRY	20	1100	30K/40K/50K	50000	WL	14.0(h) 5.9(w) 3.2(d)
81482-SU	LFX/CONT/WS/14"/20W/SCT/SL/ACRY	20	1100	30K/40K/50K	50000	WL	14.0(h) 5.9(w) 3.2(d)

46091-SU

- Brushed Nickel Finish



46092-SU

- Black Finish



BULB REQUIRED

46094-SU

- Brushed Nickel Finish



46093-SU

- Black Finish



SPECIFICATION

- 120 volts
- Medium (E26) Base
- Uses A19 Bulb(s)
- Aluminum Body
- ETL - Wet Location

BULB SUGGESTION



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
46091-SU	FIX/WS/E26/SS	Brushed Nickel	Opal PC	1	60	4.1(h) 6.7(w) 11.8(d)
46092-SU	FIX/WS/E26/BLACK	Black Powder	Opal PC	1	60	4.1(h) 6.7(w) 11.8(d)
46093-SU	FIX/WS/E26/BLACK	Black Powder	Opal PC	1	60	4.1(h) 6.7(w) 11.8(d)
46094-SU	FIX/WS/E26/SS	Brushed Nickel	Opal PC	1	60	4.1(h) 6.7(w) 11.8(d)

Outdoor Wall Mount Sconce

Contemporary Style



85104-SU

LED BUILT-IN 5 YEAR WARRANTY

- 12 Watts
- 850 Lumens
- 30K/40K/50K
- Aluminum Body
- Acrylic Lens
- Black Finish
- 90 CRI
- 120V



85105-SU

- White Finish



85106-SU

LED BUILT-IN 5 YEAR WARRANTY

- 12 Watts
- 850 Lumens
- 30K/40K/50K
- Aluminum Body
- Acrylic Lens
- Black Finish
- 90 CRI
- 120V



85109-SU

- White Finish



85113-SU

LED BUILT-IN 5 YEAR WARRANTY

- 12 Watts
- 850 Lumens
- 30K/40K/50K
- Aluminum Body
- Acrylic Lens
- Black Finish
- 90 CRI
- 120V



85114-SU

- White Finish



85110-SU

LED BUILT-IN 5 YEAR WARRANTY

- 12 Watts
- 850 Lumens
- 30K/40K/50K
- Aluminum Body
- Acrylic Lens
- Black Finish
- 90 CRI
- 120V



85112-SU

- White Finish



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
85104-SU	LFX/WS/R/12W/SCT/BK	12	850	30K/40K/50K	50000	WL	6.7(h) 6.7(w) 4.0(d)
85105-SU	LFX/WS/R/12W/SCT/WH	12	850	30K/40K/50K	50000	WL	6.7(h) 6.7(w) 4.0(d)
85106-SU	LFX/WS/RC/12W/SCT/BK	12	850	30K/40K/50K	50000	WL	6.7(h) 6.7(w) 4.0(d)
85109-SU	LFX/WS/RC/12W/SCT/WH	12	850	30K/40K/50K	50000	WL	6.7(h) 6.7(w) 4.0(d)
85113-SU	LFX/WS/SQC/12W/SCT/BK	12	850	30K/40K/50K	50000	WL	6.3(h) 6.3(w) 4.0(d)
85114-SU	LFX/WS/SQC/12W/SCT/WH	12	850	30K/40K/50K	50000	WL	6.3(h) 6.3(w) 4.0(d)
85110-SU	LFX/WS/SQ/12W/SCT/BK	12	850	30K/40K/50K	50000	WL	6.3(h) 6.3(w) 4.0(d)
85112-SU	LFX/WS/SQ/12W/SCT/WH	12	850	30K/40K/50K	50000	WL	6.3(h) 6.3(w) 4.0(d)

Specifications may change without notice. We are not responsible for any typographical errors

Outdoor Wall Mount Sconce

Modern Design

81032-SU

- 15 Watts
- 800 Lumens
- 3000K
- Dimmable
- Metal Body
- White Glass Lens
- Black Finish
- 80 CRI



LED
BUILT-IN

5
YEAR
WARRANTY

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
81032-SU	LFX/WS/KNOB/15W/30K/BK	15	800	120	3000K	50000	DL,DIM	12.0(h) 5.5(w) 4.0(d)



Acrylic Crystal Design

81038-SU

- 10 Watts
- 800 Lumens
- 30K/40K/50K
- Dimmable
- Aluminum Body
- Acrylic crystal Lens
- Black Finish
- 80 CRI
- 120V



LED
BUILT-IN

5
YEAR
WARRANTY

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
81038-SU	LFX/WS/XTL/12"/10W/SCT/BK	10	800	30K/40K/50K	50000	DL,DIM	11.0(h) 5.5(w) 3.0(d)



4" Up & Down

81292-SU

LED BUILT-IN **5 YEAR WARRANTY**

- 18 Watts
- 1300 Lumens
- 30K/40K/50K
- Aluminum & Steel Body
- Glass Lens
- Black Finish
- 80 CRI
- 120V

4" Up / Down

81291-SU

LED BUILT-IN **5 YEAR WARRANTY**

- 9 Watts
- 650 Lumens
- 30K/40K/50K
- Aluminum & Steel Body
- Glass Lens
- Black Finish
- 80 CRI
- 120V

10" Up & Down

88143-SU

LED BUILT-IN **5 YEAR WARRANTY**

- 24 Watts
- 1700 Lumens
- 30K/40K/50K
- Aluminum Body
- Clear Lens
- Black Finish
- 80 CRI
- 120-277V

8" Up / Down

88134-SU

LED BUILT-IN **5 YEAR WARRANTY**

- 12 Watts
- 850 Lumens
- 30K/40K/50K
- Aluminum Body
- Clear Lens
- Black Finish
- 80 CRI
- 120-277V

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
81291-SU	LFX/CUBE/S/9W/SCT/BK	9	650	30/40K/50K	50000	WL	4.0(h) 3.75(w) 4.3(d)
81292-SU	LFX/CUBE/UD/18W/SCT/BK	18	1300	30/40K/50K	50000	WL	4.0(h) 3.75(w) 4.3(d)
88143-SU	LFX/UD/SQ/24W/SCT/MV/BK/10"	24	1700	30K/40K/50K	50000	WL	10.3(h) 3.5(w) 6.1(d)
88134-SU	LFX/D/SQ/8"/12W/SCT/BK	12	850	30K/40K/50K	50000	WL	8.1(h) 4.4(w) 6.1(d)

Specifications may change without notice. We are not responsible for any typographical errors

SUNLITE.COM CALL 718.768.7000 TOLL-FREE 800.605.BULB

Outdoor Wall Mount Sconce

Cylinder Up & Down

SUNLITE.COM CALL 718.768.7000 TOLL-FREE 800.605.BULB

Up / Down
49204-SU

LED BUILT-IN **5 YEAR WARRANTY**

- 12 Watts
- 1000 Lumens
- 30K/40K/50K
- Dimmable
- Steel & Glass Body
- Clear Lens
- Brushed Nickel Finish
- 80 CRI
- 120V



49205-SU

LED BUILT-IN **5 YEAR WARRANTY**

- 24 Watts
- 1800 Lumens
- 30K/40K/50K
- Dimmable
- Steel & Glass Body
- Clear Lens
- Brushed Nickel Finish
- 80 CRI
- 120



88142-SU

LED BUILT-IN **5 YEAR WARRANTY**

- 24 Watts
- 1700 Lumens
- 30K/40K/50K
- Aluminum Body
- Clear Lens
- Black Finish
- 80 CRI
- 120-277



81294-SU

LED BUILT-IN **5 YEAR WARRANTY**

- 12 Watts
- 1200 Lumens
- 30K/40K/50K
- Dimmable
- Aluminum Body
- Clear Lens
- Black Finish
- 80 CRI
- 120-277V



81295-SU

LED BUILT-IN **5 YEAR WARRANTY**

- 12 Watts
- 1200 Lumens
- 30K/40K/50K
- Dimmable
- Aluminum Body
- Clear Lens
- Black Finish
- 80 CRI
- 120-277V



90158-SU

BULB REQUIRED

- 120 volts
- Medium (E26) Base
- Metal Body
- Black Finish
- ETL Listed



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
49204-SU	LFX/DOD/T/6/12W/3SCT/BN	12	1000	30K/40K/50K	50000	WL,DIM	6.0(h) 4.35(w) 4.3(d)
49205-SU	LFX/DOD/T/8/24W/3SCT/BN	24	1800	30K/40K/50K	50000	WL,DIM	8.1(h) 4.35(w) 4.3(d)
88142-SU	LFX/UD/R/12"/24W/BK/SCT	24	1700	30K/40K/50K	50000	WL	11.9(h) 4.3(w) 6.9(d)
81294-SU	LFX/UD/HC/12W/MV/SCT/BK	12	1200	30K/40K/50K	50000	WL,DIM	9.25(h) 4.5(w) 5.25(d)
81295-SU	LFX/UD/REC/12W/MV/SCT/BK	12	1200	30K/40K/50K	50000	WL,DIM	9.13(h) 4.5(w) 5.25(d)
90158-SU	FIX/CWS/E26/BK	-	-	-	-	WL	7.0(h) 4.4(w) 7.25(d)

Outdoor Wall Mount Sconce

Seedy Glass Design



12" Up & Down

81041-SU



- 10 Watts
- 600 Lumens
- 30K/40K/50K
- Dimmable
- Aluminum Body
- Clear Seedy Lens
- Black Finish
- 80 CRI
- 120V



12" Down

81330-SU



- 15 Watts
- 800 Lumens
- 30K/40K/50K
- Dimmable
- Aluminum Body
- Clear Seedy Lens
- Black Finish
- 80 CRI
- 120V



14" Down

81227-SU



- 12 Watts
- 500 Lumens
- 30K/40K/50K
- Dimmable
- Aluminum Body
- Clear Seedy Lens
- Black Finish
- 80 CRI
- 120V



7" Down

81046-SU



- 11 Watts
- 600 Lumens
- 3000K
- Dimmable
- Glass Body
- Clear Seedy Lens
- Black Finish
- 80 CRI
- 120V



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
81041-SU	LFX/WS/SEEDY/CYL/12"/10W/SCT/BK	10	600	30K/40K/50K	50000	WL,DIM	12.0(h) 4.75(w) 4.0(d)
81330-SU	LFX/WS/CL/10W/CRI90/3SCT/BK	15	800	30K/40K/50K	50000	WL,DIM	12.0(h) 5.5(w) 4.0(d)
81227-SU	LFX/TERR/WS/4"/12W/3SCT/ORB/SEEDY	12	500	30K/40K/50K	50000	WL,DIM	14.0(h) 4.75(w) 4.25(d)
81046-SU	LFX/WS/SEEDY/UD/12"/11W/30K/BK	11	600	3000K	50000	WL,DIM	7.0(h) 5.0(w) 1.5(d)

Outdoor Wall Mount Sconce

Seedy Glass Design

5" Down



81047-SU

- 12 Watts
- 600 Lumens
- 30K/40K/50K
- Glass Body
- Clear Seedy Lens
- Black Finish
- 80 CRI
- 120V



81222-SU

- 9 Watts
- 450 Lumens
- 5000K
- 100-277V

6.5" Down



81051-SU

- 12 Watts
- 600 Lumens
- 30K/40K/50K
- Glass Body
- Clear Seedy Lens
- Black Finish
- 80 CRI
- 120V



81170-SU

- 3000K
- 100-277V

81223-SU

- 5000K
- 100-277V

5.5" Up & Down



81040-SU

- 22 Watts
- 300 Lumens
- 3000K
- Dimmable
- Glass Body
- Clear Seedy Lens
- Black Finish
- 80 CRI
- 120V




5.5" Up & Down



81205-SU

- 22 Watts
- 300 Lumens
- 3000K
- Dimmable
- Glass Body
- Clear Seedy Lens
- Black Finish
- 80 CRI
- 120V

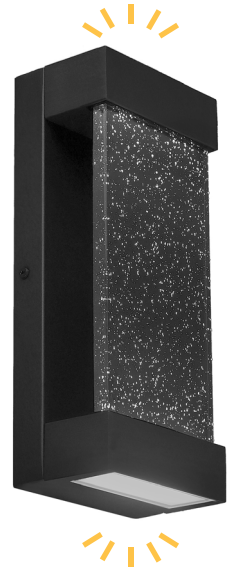

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
81047-SU	LFX/INN/WS/5"/12W/SCT/BK/SEEDY	12	600	120	30K/40K/50K	50000	WL	13.8(h) 4.8(w) 2.5(d)
81222-SU	LFX/INN/WS/5"/9W/50K/BK/SEEDY	9	450	100-277	5000K	50000	WL	13.8(h) 4.8(w) 2.5(d)
81051-SU	LFX/INN/WS/6.5"/12W/SCT/BK/SEEDY	12	600	120	30K/40K/50K	50000	WL	13.8(h) 6.5(w) 2.5(d)
81170-SU	LFX/INN/WS/6.5"/12W/30K/BK/SEEDY	12	600	100-277	3000K	50000	WL	13.8(h) 6.5(w) 2.5(d)
81223-SU	LFX/INN/WS/6.5"/12W/50K/BK/SEEDY	12	600	100-277	5000K	50000	WL	13.8(h) 6.5(w) 2.5(d)
81040-SU	LFX/WS/SEEDY/UD/B/12"/22W/30K/BK	22	300	120	3000K	50000	WL,DIM	12.0(h) 5.5(w) 2.5(d)
81205-SU	LFX/WS/SEEDY/UD/12"/22W/30K/BK	22	300	120	3000K	50000	WL,DIM	12.0(h) 5.5(w) 2.5(d)

Outdoor Security Flood Light

Motion Sensor



Round Black Finish

88902-SU

- 30K/35K/40K/50K/65K



88907-SU

- 5000K

88906-SU

- 3000K

White Finish


88903-SU

- 30K/35K/40K/50K/65K



88909-SU

- 5000K




SPECIFICATION

- 20 Watts
- 1800 Lumens
- Plastic Body
- Clear Lens
- Built-in Photocell & Motion Sensor
- 80 CRI

Square Black Finish

88911-SU

- 3000K



SPECIFICATION

- 24 Watts
- 2400 Lumens
- Plastic Body
- Clear Lens
- Black Finish
- Built-in Photocell & Motion Sensor
- 80 CRI

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
88902-SU	LFX/OSF/R/MS/24W/85S/BK	24	2000	120	30K/35K/40K/50K/65K	50000	WL	9.3(h) 6.3(w) 7.6(d)
88906-SU	LFX/OSF/R/MS/20W/30K/BK	20	1800	120	3000K	35000	WL	9.3(h) 6.3(w) 7.6(d)
88907-SU	LFX/OSF/R/MS/20W/50K/BK	20	1800	120	5000K	35000	WL	9.3(h) 6.3(w) 7.6(d)
88903-SU	LFX/OSF/R/MS/24W/85S/WH	24	2000	120	30K/35K/40K/50K/65K	50000	WL	9.3(h) 6.3(w) 7.6(d)
88909-SU	LFX/OSF/R/MS/20W/50K/WH	20	1800	120	5000K	35000	WL	9.3(h) 6.3(w) 7.6(d)
88911-SU	LFX/OSF/S/MS/24W/30K/BK	24	2400	120	3000K	35000	WL	11.9(h) 6.1(w) 5.9(d)

Flood Light

04918-SU

- 120 volts
- Medium (E26) Base
- Uses PAR38 Bulb(s)
- UL Listed



BULB REQUIRED

BULB SUGGESTION



PAR38
Med E26



A19
Med E26

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
04918-SU	PL2H/WH	White	-	2	60	4.3(h) 4.3(w) 8.5(d)

Outdoor Wall Mount Series


Flood Lights

SUNLITE.COM CALL 718.768.7000 TOLL-FREE 800.605.BULB

Low Wattage Outdoor Flood Light with Photocell

85681-SU

- 45/50/60/80 Watts
- 6000/7500/9000/12000
- 30K/40K/50K
- Aluminum Body
- Forsted Lens
- Bronze Finish
- 80 CRI
- Built-in Photocell
- 120-277V

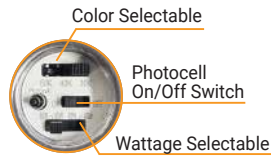

OPTIONAL ADDONS



Trunion Mount
85683-SU



Knuckle Mount
85682-SU

High Wattage Outdoor Flood Light

85548-SU

- 100/125/150 Watts
- 14000/16800/21000 Lumens
- 30K/40K/50K
- Aluminum Body
- Clear Lens
- Bronze Finish
- 80 CRI
- 120-277V



OPTIONAL ADDONS



Slip Fitter Mount
85587-SU



Trunion Mount
85588-SU

Outdoor Shoebox Area Light

85320-SU

- 20 Watts
- 2200 Lumens
- 30K/40K/50K
- Aluminum Body
- Clear Lens
- Black Finish
- 120-277V



OPTIONAL ADDONS



Knuckle Mount
85682-SU



Trunion Mount
85588-SU



Wall Installation Box
85332-SU

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
85681-SU	LFX/FL/MMW/SCT/PC/G3	45/50/60/80	6000/7500/9000/12000	30K/40K/50K	50000	DIM,WL	6(h) 9.6(w) 2.6(d)
85548-SU	LFX/FL/HMW/SCT/PC	100/125/150	14000/16800/21000	30K/40K/50K	50000	WL	8.6(h)11.6(w)3.9(d)
85320-SU	LFX/STL/20W/MV/50K/T3	20	2200	5000K	50000	WL,DLC	2.4(h) 7.3(w) 8.5(d)

Outdoor Wall Mount Series

Wall Packs




High Wattage Wall Pack with Built-in Photocell

87830-SU



- 100/120/150/185 Watts
- 14500/17400/21800/26800 Lumens
- 30K/40K/50K
- Dimmable
- Bronze Finish Aluminum Body
- Clear Glass Lens
- 70 CRI
- 120-277V




Wall Pack with Built-in Photocell

08563-SU



- 60/90/100/120 Watts
- 9000/13500/15000/18000 Lumens
- 30K/40K/50K
- Aluminum Body
- Clear Lens
- Bronze Finish
- Built-in Photocell
- 80 CRI
- 120-277V

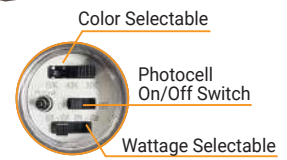

Rotatable Wall Pack

97094-SU

- 60 Watts
- 7800 Lumens



Rotate 270 Degrees to allow you to customize your range of light

97095-SU

- 80 Watts
- 10000 Lumens



SPECIFICATION

- 30K/40K/50K
- Dimmable
- Die-Cast Aluminum Body
- Polycarbonate Clear Lens
- Black Finish
- 70 CRI
- 100-277V

Cut Off Wall Pack

97064-SU

- 25/40/60/80 Watts
- 3000/10800 Lumens
- 30K/40K/50K
- Aluminum Body
- Clear Polycarbonate Lens
- Bronze Finish
- 70 CRI
- 120-277V



97069-SU

- 80 Watts
- 10640 Lumens
- 5000K

OPTIONAL ADDONS



Emergency Battery
90710-SU

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
87830-SU	SF/WP/HL/18/185S/73S/MV/BK/PC	100/120/150/185	14500/17400/21800/26800	30K/40K/50K	50000	WL_DIM,DLC	14(h) 19.3(w) 4.8(d)
08563-SU	LFX/WP/SCT/HMW/MV/G3	60/90/100/120	9000/13500/15000/18000	30K/40K/50K	50000	WL_DIM,DLC	9.26(h) 8.5(w) 6.06(d)
97094-SU	LFX/RWP/60W/3SCT	60	7800	30K/40K/50K	50000	WL_DIM,DLC	9.4(h) 5.9(w) 10.0(d)
97095-SU	LFX/RWP/80W/3SCT	80	10000	30K/40K/50K	50000	WL_DIM,DLC	8.0(h) 11.6(w) 12.0(d)
97064-SU	LFX/WP/MW/3SCT	25/40/60/80	3000/10800	30K/40K/50K	50000	WL,DLC	8.3(h) 14.4(w) 9.2(d)
97069-SU	LFX/WP/80W/MV/50K	80	10640	5000K	50000	WL,DLC	8.3(h) 14.4(w) 9.2(d)

Specifications may change without notice. We are not responsible for any typographical errors

Outdoor Wall Mount Series

Wall Packs

Wall Pack

87753-SU

- 25/40/60/80 Watts
- 3250/5200/7800/10400 Lumens
- 30K/40K/50K
- Dimmable
- Bronze Finish Aluminum Body
- Clear Lens
- 80 CRI
- 120-277V



OPTIONAL ADDONS



Emergency Battery
90712-SU

Adjustable Bracket Down Wall Pack

49169-SU

- 21/28/35 Watts
- 2730/3640/4550 Lumens
- 30K/40K/50K
- Aluminum Body
- Clear Lens
- Bronze Finish
- 70 CRI
- 120-347V



Photo Sensor
97091-SU

OPTIONAL ADDONS

Adjustable Bracket Down Wall Pack with Photocell

08562-SU

- 20/40/60/80 Watts
- 2780/5550/8330/11100 Lumens
- 30K/40K/50K
- Aluminum Body
- Clear Lens
- Bronze Finish
- 80 CRI
- 120-347V



Mini Wall Pack

87820-SU

- Black Finish



87821-SU

- White Finish



SPECIFICATION

- 15 Watts
- 1650 Lumens
- 27K/30K/35K/40K/50K
- Aluminum Body
- Polycarbonate Clear Lens
- Black Finish
- Built-in Photocell
- 80 CRI
- 120V

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
87753-SU	LFX/WP/SCT/MW/MV	25/40/60/80	3250/5200/7800/10400	30K/40K/50K	50000	WL,DLC	9.2(h) 14.3(w) 7.5(d)
49169-SU	LFX/SWP/MW/SCT/BRZ	21/28/35	2730/3640/4550	30K/40K/50K	50000	WL,DLC	8.0(h) 6.0(w) 4.0(d)
08562-SU	LFX/SWP/HMW/3SCT/BRZ/G3	20/40/60/80	2780/5550/8330/11100	30K/40K/50K	50000	WL,DLC	9.3(h) 8.5(w) 6.1(d)
87820-SU	SF/WP/MN/9/15/85S/120/BK/PC	15	1650	27K/30K/35K/40K/50K	50000	WL	9.2(h)5.4(w)2.4(d)
87821-SU	SF/WP/MN/9/15/85S/120/WH/PC	15	1650	27K/30K/35K/40K/50K	50000	WL	9.2(h)5.4(w)2.4(d)

Outdoor Area Fixtures

Wall Pack & Roadway Dusk To Dawn

Mini Wall Pack

88119-SU

- 12 Watts
- 850 Lumens
- 30K/40K/50K
- Aluminum Body
- White Lens
- Black Finish
- Built-in Photocell
- 80 CRI
- 120V



Mini Wall Pack

08564-SU

- 12/20/30 Watts
- 30K/40K/50K
- 1950/2600/3900 Lumens
- Aluminum Body
- White Lens
- Bronze Finish
- Built-in Photocell
- 80 CRI
- 120-277V



Barn Light with Built-in Photocell

49148-SU

- 36/48/60 Watts
- 4500/6000/7500 Lumens
- 30K/40K/50K
- Dimmable
- Die-Cast Aluminum Body
- Polycarbonate Clear Lens
- Dark Bronze Finish
- Built-in Photocell
- 80 CRI
- 120-227V



Barn Light with Built-in Photocell

49211-SU

- 60/80/100 Watts
- 12000 Lumens
- 35K/40K/50K
- Die-Cast Aluminum Body
- Polycarbonate Clear Lens
- Built-in Photocell
- 80 CRI
- 120-227V



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
88119-SU	LFX/TP/12W/SCT/PC	12	850	30K/40K/50K	50000	WL	8.6(h) 5.3(w) 2.1(d)
08564-SU	LFX/MWP/MW/SCT/ORB/PC/G3	15/20/30	1950/2600/3900	30K/40K/50K	50000	WL	9.1(h) 5.9(w) 2.9(d)
49148-SU	LFX/RL/MW/SCT/PC	36/48/60	4500/6000/7500	30K/40K/50K	50000	WL,DIM,DLC	4.2(h) 7.0(w) 10.4(d)
49211-SU	LFX/RL/HMW/SCT/G2/PC	60/80/100	12000	35K/40K/50K	50000	WL	3.49(h) 11.75" (d)

Outdoor Area Fixtures

Garage & Canopy Lights

Square

85676-SU

- 40/60/80 Watts
- 5040/7560/10080 Lumens
- 30K/40K/50K
- Dimmable
- Aluminum & Polycarbonate Body
- Clear Lens
- Bronze Finish
- IP65
- 80 CRI
- 120-277V



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
85676-SU	SF/GC/SQ/MW/83S/MV/BZ	40/60/80	5040/7560/10080	30K/40K/50K	50000	DIM,WL,DLC	10.2(h) 10.2(w)3.4(d)
85670-SU	SF/GC/SQ/MW/83S/MV/BZ/MS	40/60/80	5227/7840/10453	30K/40K/50K	50000	DIM,WL,DLC	10.9(h) 10.9(w)6.14(d)

LED Commercial UFO High Bay

89795-SU

- 100/150/200 Watts
- 15000/22500/30000 Lumens
- 35K/40K/50K
- Dimmable
- Die-Cast Aluminum Body
- Polycarbonate Clear Lens
- Black Finish
- 80 CRI
- 120-277V



Safety Cable
89790-SU



Polycarbonate Lens
89789-SU



Polycarbonate Reflector
89787-SU

OPTIONAL ADDONS



Remote Controller
89785-SU



Microwave Motion & Daylight Sensor
89699-SU

ONLY COMPATIBLE WITH 89782-SU

89782-SU

- 200 Watts
- 28000 Lumens
- 5000K
- Dimmable
- Die-Cast Aluminum Body
- Clear Lens
- Black Finish
- 80 CRI
- 120-277V



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
89795-SU	SF/HB/U/MW/83S/MV/BK/G2	100/150/200	15000/22500/30000	35K/40K/50K	50000	WL,DIM,DLC	7.4(h)13.8(w)13.8(d)
89782-SU	LFX/HB/200W/50K/V2	200	28000	5000K	50000	WL,DIM,DLC	5.0(h)12.6(w)12.6(d)

Outdoor Post Mounted Fixture

Pathway Lights



**BULB
REQUIRED**

BULB SUGGESTION



10"

47244-SU

- Pole Mount
- 120 volts
- Medium (E26) Base
- Uses A19 Bulb
- Polycarbonate Body
- White Acrylic Lens
- UL Listed–Wet Location
- Fit Most 3" Diameter Posts (Not Included)



12"

41320-SU



10"

47242-SU

- White Acrylic Lens



10"

47246-SU

- Clear Acrylic Lens



12"

41321-SU

- Clear Acrylic Lens



Carriage & Coach Style Collection

41322-SU

- 120 volts
- Medium (E26) Base
- Uses A19 Bulb(s)
- Metal & Glass Body
- UL Listed
- Fit Most 3" Diameter Posts (Not Included)



**BULB
REQUIRED**

BULB SUGGESTION



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
47242-SU	DOD/10GL/BK/WH/MED	Black	White Acrylic	1	100	12.8(w) 10.0(d)
47246-SU	DOD/10GL/BK/CL/MED	Black	Clear Acrylic	1	100	12.8(w) 10.0(d)
47244-SU	DOD/10GL/WH/WH/MED	White	White Acrylic	1	100	12.8(w) 10.0(d)
41320-SU	DOD/12GL/WH/WH/MED	White	White Acrylic	1	100	12.8(w) 12.0(d)
41321-SU	DOD/12GL/BK/CL/MED	Black	Clear Acrylic	1	100	12.8(w) 12.0(d)
41322-SU	ODI1150/BK	Black	Clear Glass	1	60	12.4(h) 5.9(w) 5.9(d)

Specifications may change without notice. We are not responsible for any typographical errors

SUNLITE.COM CALL 718.768.7000 TOLL-FREE 800.605.BULB

Outdoor Post Mounted Fixture

Pathway Lights

49187-SU

- 25/40/60/80 Watts
- 3250/5200/7800/10400 Lumens
- 30K/40K/50K
- Aluminum Body
- Frosted Lens
- Black Finish
- 70 CRI
- 120-277V



85618-SU

- 70/100/150 Watts
- 30K/40K/50K
- Aluminum Body
- Clear Lens
- Black Finish
- 70 CRI
- 120-277V



Round Bollard

87995-SU

- 12/16/22 Watts
- 1620/2160/2970 Lumens
- 30K/40K/50K
- Aluminum & Polycarbonate Body
- Clear Lens
- Bronze Oxidation Treatment Finish
- 80 CRI
- IP65 Rated Weather Proof
- 120-277V



Square Bollard

87996-SU

- 12/16/22 Watts
- 1560/2080/2860 Lumens
- 30K/40K/50K
- Aluminum & Polycarbonate Body
- Clear Lens
- Bronze Oxidation Treatment Finish
- 80 CRI
- IP65 Rated Weather Proof
- 120-277V



Mounting Hardware Included

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
49187-SU	LFX/PTL/MW/SCT	25/40/60/80	3250/5200/7800/10400	30K/40K/50K	50000	WL,DIM,DLC	40.0(h) 18.0(d)
85618-SU	LFX/PTL/SCT/55W	70/100/150		30K/40K/50K	50000	WL,DIM	19.2(h) 14.2(d)
87995-SU	LFX/LBF/R/14W/19W/24W/SCT	14/19/24	1620/2160/2970	30K/40K/50K	50000	WL,DIM	42.1(h) 6.3(d)
87996-SU	LFX/LBF/S/14W/19W/24W/SCT	14/19/24	1560/2080/2860	30K/40K/50K	50000	WL,DIM	42.1(h) 6.3(w)

LED Wall Mount / Surface Mount

88144-SU

- 21 Watts
- 2560 Lumens
- 30K/40K/50K
- Dimmable
- Aluminum Body
- Frosted Glass Lens
- Gray Finish
- 80 CRI
- 120-277V



Two Way Mounting



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
88144-SU	LFX/VT/VTA/21W/3SCT	21	2560	30K/40K/50K	50000	WL,DIM,DLC	12.6(h) 4.96(w) 4.96(d)

Surface Mount

41329-SU

- Surface Mount
- 120 volts
- Medium (E26) Base
- Uses A19 Bulb
- Aluminium Body
- UL Listed–Wet Location
- Bulb Not Included



BULB SUGGESTION



A19
Med E26

Wall Mount

41368-SU

- Wall Mount
- 120 volts
- Medium (E26) Base
- Uses A19 Bulb
- Aluminium Body
- UL Listed–Wet Location



OPTIONAL ADDONS



Blue
88150-SU



Green
88151-SU



Red
88152-SU



Yellow
88153-SU

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
41329-SU	VT100 1/2" Pipe	Metallic	Clear Glass	1	100	9.0(w) 4.3(d)
41368-SU	VTA100	Metallic	Clear Glass	1	150	7.2(w) 9.5(h) 4.2(d)

LED Construction Work Light

1 Light Tripod Stand

88176-SU

- 72 Watts
- 7000 Lumens
- 4000K



2 Light Tripod Stand

88178-SU

- 144 Watts
- 7000 Lumens
- 4000K



SPECIFICATION

- Aluminum Body
- Clear Glass Lens
- Yellow Finish
- 80 CRI
- 120V

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
88176-SU	LFX/WL/1H/72W/40K	72	7000	120	4000K	50000	WL	25.4(h) 11.8(w) 5.1(d)
88178-SU	LFX/WL/2H/144W/40K	144	14000	120	4000K	50000	WL	25.4(h) 11.8(w) 5.1(d)

15 FT LED Portable Work Light

88179-SU

25 FT

88180-SU



Grounded Outlet



SPECIFICATION

- 12 Watts
- 1200 Lumens
- Plastic Body
- COB LED
- Built-in Grounded Outlet

Item#	Description	Watt	Lumen	Color Temp	Hours	Cord	Dimension(in)
88179-SU	LFX/PWL/12W/15FT	12	1200	6200K	50000	15 FT	17.3(h) 4.7(w) 3.9 (d)
88180-SU	LFX/PWL/12W/25FT	12	1200	6200K	50000	25 FT	17.3(h) 4.7(w) 3.9 (d)

LED Construction Work Light

Hanging Mount

85262-SU

- 60 Watts
- 7500 Lumens
- 5000K
- Aluminum & Plastic Body
- Cage Polycarbonate Lens
- Orange Finish
- Linkable
- 80 CRI
- 120V



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
85262-SU	LFX/LED/CC/60W/50K/V2	60	7500	5000K	50000		12.1(w) 6.9(d)

String Lights with S14 LED Bulbs



Outdoor / Indoor

24 FT 7 Light

80571-SU

- Plastic Body
- Clear Bulbs
- Connect-able Strands
- UL Listed
- S14 LED Bulbs Included



48 FT 15 Light

80572-SU



Item#	Description	Finish	Color Temp	Lights	Hours	Dimension(in)
80571-SU	EXT/LED/SL/24'/7S	Black	2700K	7 x (1.5W)	25000	24 FT
80572-SU	EXT/LED/SL/48'/15S	Black	2700K	15 x (1.5W)	25000	48 FT

100 FT Linkable LED String Light

80423-SU

- 120 Watts
- 1680 x 10 Lumens
- Plastic Body
- Shatterproof Lens
- Aluminum Carabiners
- 18AWG Wire
- 10ft spacing Between Lights
- Linkable up to 3 sets
- 120V



**LED
BUILT-IN**



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
80423-SU	LED/SL/100'/50K	120	1680 X 10 Lights	5000K	50000	WL	3.44(h) 3.94(w)

50 FT 5 Light

04223-SU

- 14 Gauge Wire
- 120 volts
- Medium (E26) Base
- Uses A19 Bulb(s)
- Plastic Body
- ETL Listed
- Bulb Not Included



50 FT 5 Light

04224-SU

- 16 Gauge Wire

100 FT 10 Light

04227-SU

- 16 Gauge Wire



**BULB
REQUIRED**

BULB SUGGESTION



Item#	Description	Finish	Gauge	Lights	Max Watts	Dimension
04223-SU	EX50-14/2/SL	Yellow	14	5	75	50 FT
04224-SU	EX50-16/2/SL	Yellow	16	5	150	50 FT
04227-SU	EX100-16/2/SL	Yellow	16	10	150	100 FT

Specifications may change without notice. We are not responsible for any typographical errors

LED Exit Sign & Emergency Lights Combo

2-in-1 Combo

Metal Exit Sign Combo

05275-SU



- Back Mount
- 120/277 volts
- Rechargeable NiCd Battery
- 90 Minutes Illumination
- Metal Housing
- UL Listed



New York City Exit signs require red lettering with a height of 8 inches, and the unit must be made of metal or other durable materials.



Optional Third Head Included

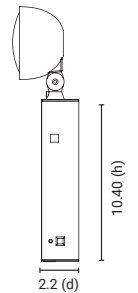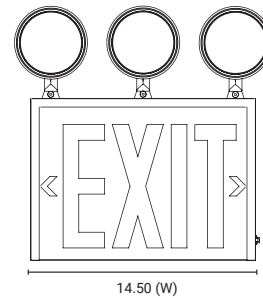


LED
BUILT-IN

Thermoplastic Exit Sign Combo

05279-SU


- Back & Top Mount
- 120/277 volts
- Rechargeable NiCd Battery
- 90 Minutes Illumination
- Thermoplastic Housing
- UL Listed

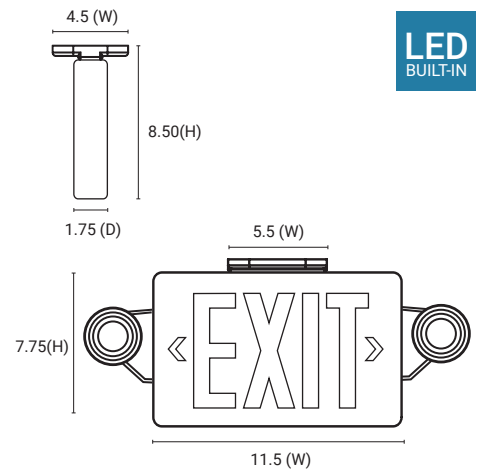

LED
BUILT-IN

04342-SU

- Back, Top & Side Mount
- 120/277 volts
- Rechargeable NiCd Battery
- 90 Minutes Illumination
- Thermoplastic Housing
- UL Listed

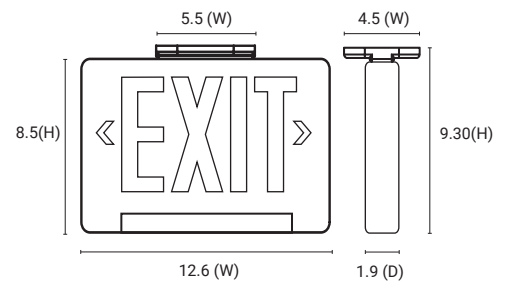


Item#	Description	Lens	Finish	Lights	Mounting	Dimension(in)
05275-SU	EXIT/LED/COMBO/1F/2-3H/EM/NYC	White Single Face	Metal	2 or 3	Back	10.4(h) 14.5(w) 2.2(d)
05279-SU	EXIT/LED/R/2H/1-2F/COMBO	White One or Two Face	Thermoplastic	2	Back Top	8.5(h) 11.5(w) 1.75(d)
04342-SU	EXIT/1/R/W/RC	White One or Two Face	Thermoplastic	1	Back, Top, Side	9.3(h) 12.6(w) 1.9(d)

Metal Exit Sign



05276-SU

- Back, Top & Side Mount
- 120 /277 volts
- Rechargeable NiCd Battery
- 90 Minutes Illumination
- Metal / Thermoplastic Housing
- UL Listed

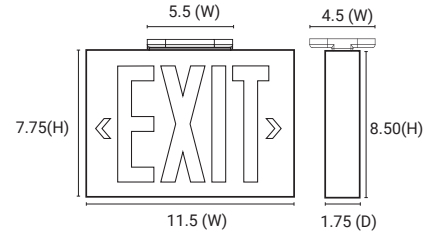


New York City Exit signs require red lettering with a height of 8 inches, and the unit must be made of metal or other durable materials.

Thermoplastic Exit Sign



05271-SU

- Back, Top & Side Mount
- 120 /277 volts
- Rechargeable NiCd Battery
- 90 Minutes Illumination
- Metal / Thermoplastic Housing
- UL Listed

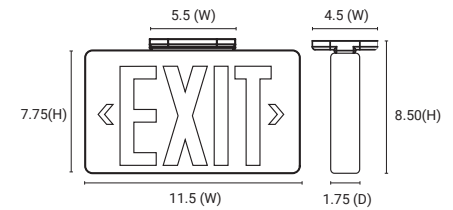


Metal Exit Sign



04344-SU

- Back & Top Mount
- 120 /277 volts
- Rechargeable NiCd Battery
- 90 Minutes Illumination
- UL Listed (Rated Wet Location)

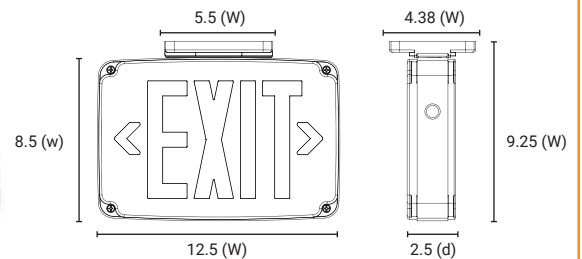

Item#	Description	Lens	Finish	Lights	Mounting	Dimension(in)
05276-SU	EXIT/LED/1-2F/EM/NYC	One or Two Face	Metal	1	Back, Top, Side	8.5(h) 11.5(w) 1.75(d)
05271-SU	EXIT/LED/R/EM/1-2F	One or Two Face	Thermoplastic	1	Back, Top, Side	8.5(h) 11.5(w) 1.75(d)
04344-SU	EXIT/SU/2F/R/WH/WL/EM	Two Face	Metal	1	Back, Top	8.5(h) 12.5(w) 2.5(d)

LED Exit Sign


Edge Lit & Recessed Mount

Metal Recessed Mount Exit Sign

04326-SU

LED
BUILT-IN

- Recessed Mount
- 120 /277 volts
- Rechargeable NiCd Battery
- 90 Minutes Illumination
- UL Listed

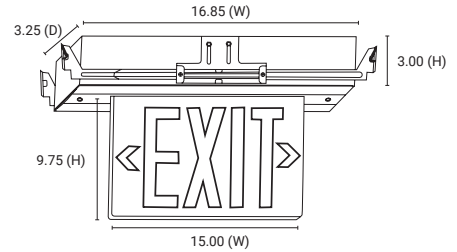

NYC
APPROVED


New York City Exit signs require red lettering with a height of 8 inches, and the unit must be made of metal or other durable materials.

Metal Clear One Face

05277-SU

LED
BUILT-IN

- Top & Side Mount
- 120 /277 volts
- Rechargeable NiCd Battery
- 90 Minutes Illumination
- UL Listed

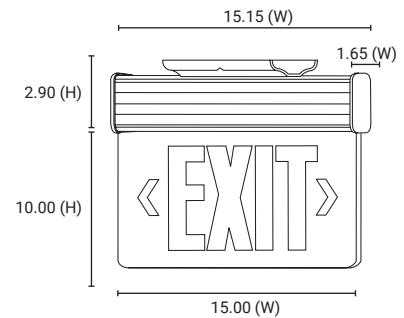

NYC
APPROVED


New York City Exit signs require red lettering with a height of 8 inches, and the unit must be made of metal or other durable materials.

Metal Mirror Aluminum Two Face

05278-SU

LED
BUILT-IN

- Top & Side Mount
- 120 /277 volts
- Rechargeable NiCd Battery
- 90 Minutes Illumination
- UL Listed

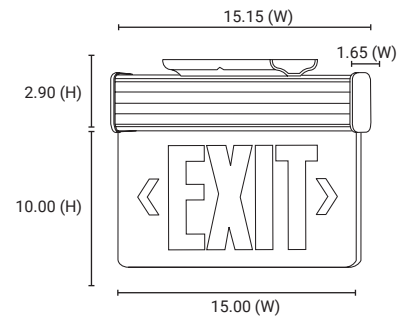

NYC
APPROVED

New York City Exit signs require red lettering with a height of 8 inches, and the unit must be made of metal or other durable materials.

Item#	Description	Lens	Finish	Lights	Mounting	Dimension(in)
04326-SU	EXIT/EDGE/RC/2RF/MI/AL/EM/NYC	Mirror Two Face	Acrylic & Metal	1	Recessed	12.75(h) 16.85(w) 3.25(d)
05277-SU	EXIT/LED/EDGE/SU/1F/WH/CL/EM/NYC	Clear One Face	Acrylic & Metal	1	Top, Side	12.9(h) 15.15(w) 1.65(d)
05278-SU	EXIT/LED/EDGE/SU/2F/WH/MI/EM/NYC	Mirror Aluminum Two Face	Acrylic & Metal	1	Top, Side	12.9(h) 15.15(w) 1.65(d)

LED Emergency Lights

Wall Mount



Metal Emergency Lights

05274-SU

- Wall Mount
- 120/277 volts
- Rechargeable NiCd Battery
- 90 Minutes Illumination
- Metal Body
- UL Listed



Thermoplastic Emergency Lights

05268-SU

- Wall Mount
- 120/277 volts
- Rechargeable NiCd Battery
- 90 Minutes Illumination
- Plastic Body
- UL Listed



05269-SU

- Wall Mount
- 120/277 volts
- Rechargeable NiCd Battery
- 90 Minutes Illumination
- Plastic Body
- UL Listed



Item#	Description	Lens	Finish	Lights	Mounting	Dimension(in)
05274-SU	EMER/LED/2H/EM/NYC	White Two Head	Metal	2	Back	10.4(h) 14.5(w) 2.2(d)
05268-SU	EMER/LED/2H	White Two Head	Plastic	2	Back	4.3(h) 10.1(w) 3.5(d)
05269-SU	EMER/LED/2H/COM	White Two Head	Plastic	2	Back	3.9(h) 6.3(w) 1.8(d)

LED Step Light

88920-SU

- 2 Watt
- 120 Lumen
- 120 Volt
- 50000 Hours
- 3000K
- Plastic Body
- IP67 Rated
- 80 CRI



IP67 Rated Water Resistant

OPTIONAL ADDONS



88944-SU	Black
88945-SU	Brushed Nickel
88946-SU	Oil Rubbed Bronze
88943-SU	White



88932-SU	Black
88933-SU	Brushed Nickel
88934-SU	Oil Rubbed Bronze
88931-SU	White



88938-SU	Black
88939-SU	Brushed Nickel
88940-SU	Oil Rubbed Bronze
88937-SU	White



88926-SU	Black
88927-SU	Brushed Nickel
88928-SU	Oil Rubbed Bronze
88925-SU	White

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
88920-SU	LFX/SL/30K	2	35	120	3000K	25000	WL	4.7(h) 2.9(w) 1.7(d)

Specifications may change without notice. We are not responsible for any typographical errors

SUNLITE.COM CALL 718.768.7000 TOLL-FREE 800.605.BULB

LFX/EC/2/20W/MV/D/40K LED EC Fixture

85471-SU

- 20 Watt
- 2620 Lumen
- 120-277 Volt
- 50000 Hours
- 4000K



LFX/FCM16/30W/AL/SCT LED FIXTURE

50150-SU

- 30 Watt
- 2800 Lumen
- 120 Volt
- 50000 Hours
- 27K/30K/40K/50K/65K



LFX/1X1/10W/SCT LED Flat Panel Fixture

87746-SU

- 10 Watt
- 920 Lumen
- 120 Volt
- 50000 Hours
- 30K/35K/40K/45K/50K



LFX/DBN13/EL/FR/20W/MV/40K LED DBL BAND TRIM FIX

81036-SU

- 20 Watt
- 1400 Lumen
- 100-277 Volt
- 50000 Hours
- 4000K



LFX/2X4/60W/DLC/30K/D/MV/0-10V/2PK FLAT PANEL

85380-SU

- 60 Watt
- 6000 Lumen
- 100-277 Volt
- 50000 Hours
- 3000K



49055-SU

- 23 Watt
- 1380 Lumen
- 120 Volt
- 3000K

LFX/MU/SQ/11"/16W/D/30K LED SQUARE MUSHROOM

88690-SU

- 16 Watt
- 1200 Lumen
- 120 Volt
- 50000 Hours
- 3000K



LFX/2X4/55W/D/MV/40K LED LAY-IN TROFFER

85229-SU

- 55 Watt
- 7040 Lumen
- 120-277 Volt
- 50000 Hours
- 4000K



LFX/E26/7"/10W/30K LED E26 FIXTURE W/P-CHAIN

88670-SU

- 10 Watt
- 700 Lumen
- 100-277 Volt
- 50000 Hours
- 3000K



LFX/2X2/30W/DIM/MV/40K ACRY DIFF LAY IN TROFFER FIX

85136-SU

- 30 Watt
- 3750 Lumen
- 120-277 Volt
- 50000 Hours
- 4000K



88671-SU

- 4000K

LFX/SDL/4S/10W/D/50K 4" LED SLIM DOWNLIGHT

82057-SU

- 10 Watt
- 650 Lumen
- 120 Volt
- 36000 Hours
- 5000K



SUNLITE.COM CALL 718.768.7000 TOLL-FREE 800.605.BULB

AQF/PD/OC/MB ANTIQ FIX HEXAGON CAGE PEND BLACK

07094-SU

- E26 Base Base
- 1 Light
- 120 Volt
- 60 Watt Max



AQF/TGC/T ANTIQ FIX TALL TRANSP GLASS CYLINDER

07046-SU

- E26 Base Base
- 1 Light
- 120 Volt
- 60 Watt Max



TG/PD/SP/6.5 TINTED GLASS PENDANT 6.5" SPHERE FIX

07022-SU

- E26 Base Base
- 1 Light
- 120 Volt
- 60 Watt Max



CF/PD/Z/BB BABY BLUE ZED FIXTURE

88754-SU

- E26 Base Base
- 1 Light
- 120 Volt
- 60 Watt Max



TG/PD/SP/9 TINTED GLASS PENDANT 9" SPHERE FIX

07020-SU

- E26 Base Base
- 1 Light
- 120 Volt
- 60 Watt Max



AQF/PD/BR BROWN CANOPY/PENDANT FOR AQF FIXTURES

07095-SU

- E26 Base Base
- 1 Light
- 120 Volt
- 60 Watt Max



CH5WT 5 BRANCH WHITE TEXTURED CHANDELIER

04447-SU

- E12 Base Base
- 5 Light
- 120 Volt
- 60 Watt Max



BZL/180W/24V/D/30K/TRIPLE LED STRIPS S2835

80989-SU

- 180 Watt
- 3500 Lumen
- 24 Volt
- 50000 Hours
- 3000K-3500K



AQF/2WC/MB ANTIQ FIX 2 WALL CAGE MATTE BLACK

07040-SU

- E26 Base Base
- 2 Light
- 120 Volt
- 60 Watt Max



80987-SU

- 140 Watt
- 3000 Lumen
- 3000K-3500K

80991-SU

- 100 Watt
- 1700 Lumen
- 24 Volt
- 50000 Hours
- 3000K

80992-SU

- 100 Watt
- 1700 Lumen
- 24 Volt
- 50000 Hours
- 4000K

AQF/WC5/AB ANTIQ FIX 5.5" WALL CANOPY ANTIQ BRASS

07036-SU

- E26 Base Base
- 1 Light
- 120 Volt
- 60 Watt Max



BZL/S150W/24V LED DRIVER

80993-SU

- 150 Watt
- 24 Volt



DIMMER & DRIVER SWITCH/100W/24V

88655-SU

- 100 Wattage load
- Covert 120 AC to 24V



Sunshine Lighting
744 Clinton Street
Brooklyn, NY 11231