



Product Reference Guide



MKS™ was established with a vision to provide the lighting industry with innovative custom illumination that bridges technology and the creation of meaningful, life-enhancing solutions. With a passion for transforming spaces with light, our team brings together art, science and the latest in LED technology. Our team of experienced staff uses state of the art equipment, ensuring your products are spec grade quality.

Our state of the art machinery includes a goniophotometer, basic photometric with visible and UV and integrating spheres. Our high tech software includes 3d solid-works design and Autocad. With both our machinery and software, we have the capability for designing and fabrication of electronic drivers, LED light engines, injection molding, die casting, and metalwork – fabrication assembling and housing. Our team of lighting engineers can design any spec grade lighting solution. Our goal is to bring your vision into fruition with a product that will illuminate and enhance the environment being shaped.

info@MKSLED.com

Tel: 212.590.0131

104 Halleck St., Brooklyn, NY 11231

MKSLED.com

Downlights

04



All in One Downlights

04-05



Remodel Downlights

06



New Construction Downlights

07



Commercial Downlights

08



Architectural Downlights

10-11



Trims



Multi-head Series

12-18



Multi-head Downlights



Contemporary Series

18-19



Contemporary Downlights




Designer Series

20-24



Designer Downlights



Linear Series

25-27



Up and Down Series



Cylinders

28-29



Pendant Series

30-31



Surface Mount Series

32-33



Wall Mount Series



Track Lights

34-39




Track Lights



MKS Downlights

Allie Series



Features:

- A body made of die-cast aluminum allows passive cooling through heat dissipation
- Nichia LED chip with 50,000 hours life span
- Adjustable color temperature
- ERP Driver
- Durable Metal Clips

Remodel Downlight
No Housing Need



Trim Included


4 in

Nichia Chip

20 Watts | 1500 Lumens

Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI
87817-SU	LFX/RDL/ALLIE/4R/CCT	20W	1500+-	30K/40K/55K	120-277	Phase & 0-10V	80

Remodel Series



Features:

- A body made of die-cast aluminum allows passive cooling through heat dissipation
- Nichia LED chip with 40,000 hours life span
- Multiple colored round and square trim options
- 90+ CRI available
- Lower and higher lumen packages available upon request (up to 2,000 Lumens)



Round | Square

Compatible with 5" round and square trims

See page 10-11






Trim sold separately

4 in

Nichia Chip

24 Watts | 1401 Lumens

Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Trim
89084-MKS	MKS/RDL/4NT/24W/30K	24W	1424+-	3000K	120-277	Phase & 0-10V	80	Not included



Nichia Chip 28 Watts | 2012 Lumens



Round | Square

Compatible with 5" round and square trims
See page 10-11

5/6 Inches Remodel Series


Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Trim
89092-MKS	MKS/RDL/5NT/27K	22W	1390+-	2700K	120-277	Phase & 0-10V	80	Not included
89087-MKS	MKS/RDL/5NT/30K	22W	1400+-	3000K	120-277	Phase & 0-10V	80	Not included
89093-MKS	MKS/RDL/5NT/35K	22W	1418+-	3500K	120-277	Phase & 0-10V	80	Not included
89031-MKS	MKS/RDL/5NT/40K	22W	1428+-	4000K	120-277	Phase & 0-10V	80	Not included
89036-MKS	MKS/RDL/5NT/50K	22W	1438+-	5000K	120-277	Phase & 0-10V	80	Not included

6 Inches Remodel Series

Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Trim
89097-MKS	MKS/RDL/6NT/27K	28W	1976+-	2700K	120-277	Phase & 0-10V	80	Not included
89171-MKS	MKS/RDL/6NT/30K	28W	1980+-	3000K	120-277	Phase & 0-10V	80	Not included
89098-MKS	MKS/RDL/6NT/35K	28W	1992+-	3500K	120-277	Phase & 0-10V	80	Not included
89188-MKS	MKS/RDL/6NT/40K	28W	2003+-	4000K	120-277	Phase & 0-10V	80	Not included
89064-MKS	MKS/RDL/6NT/50K	28W	2012+-	5000K	120-277	Phase & 0-10V	80	Not included

Downlights

Remodel Series





Nichia Chip 22 Watts | 1438 Lumens

Features:

- A body made of die-cast aluminum allows passive cooling through heat dissipation
- Nichia LED chip with 40,000 hours life span
- Multiple colored round and square trim options
- 90+ CRI available
- Lower and higher lumen packages available upon request (up to 2,000 Lumens)


MKS Downlights

New Construction Series

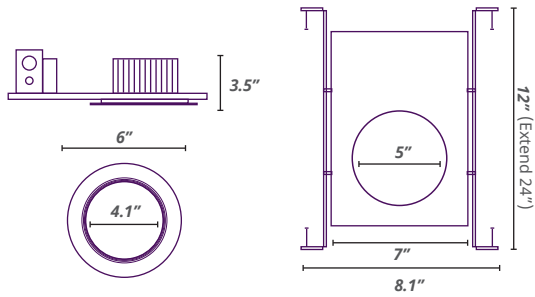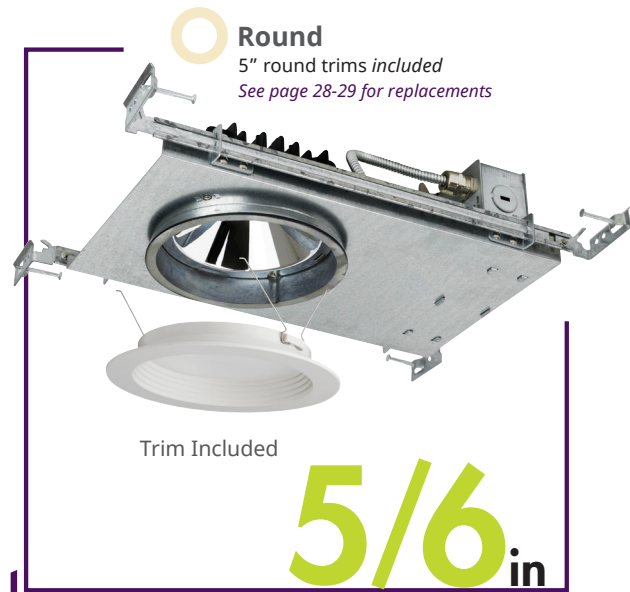


Nichia Chip 25 Watts | 1778 Lumens

Square
5" square trims included
See page 28-29 for replacements

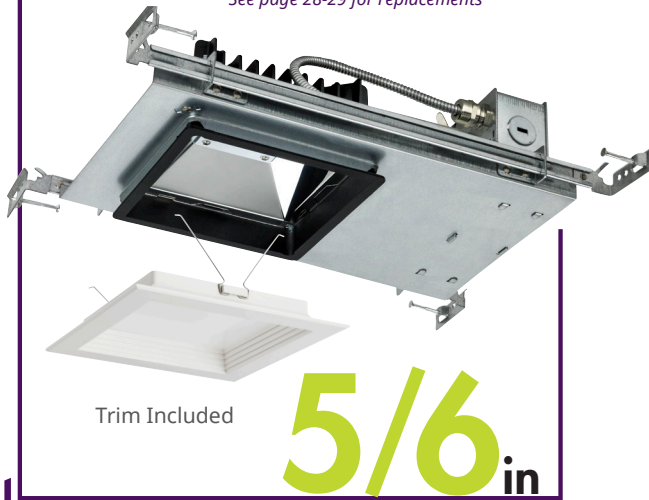

Nichia Chip 25 Watts | 1778 Lumens

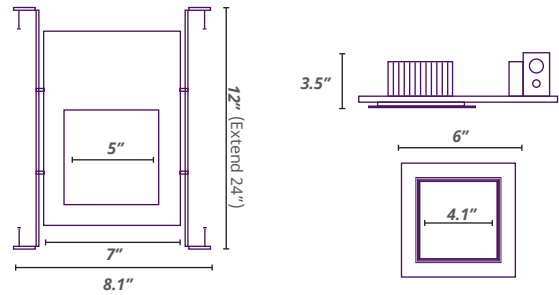

Features:



- A body made of die-cast aluminum allows passive cooling through heat dissipation
- Nichia LED chip with 40,000 hours life span
- Round trim included with fixture

Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Trim
89061-MKS	MKS/NDL/5R/27K	25W	1755+-	2700K	120-277	Phase & 0-10V	80	Included
89050-MKS	MKS/NDL/5R/30K	25W	1764+-	3000K	120-277	Phase & 0-10V	80	Included
89066-MKS	MKS/NDL/5R/35K	25W	1769+-	3500K	120-277	Phase & 0-10V	80	Included
89110-MKS	MKS/NDL/5R/40K	25W	1773+-	4000K	120-277	Phase & 0-10V	80	Included
89051-MKS	MKS/NDL/5R/50K	25W	1778+-	5000K	120-277	Phase & 0-10V	80	Included

Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Trim
89055-MKS	MKS/NDL/5S/30K	25W	1764+-	3000K	120-277	Phase & 0-10V	80	Included
89058-MKS	MKS/NDL/5S/35K	25W	1769+-	3500K	120-277	Phase & 0-10V	80	Included
89116-MKS	MKS/NDL/5S/40K	25W	1773+-	4000K	120-277	Phase & 0-10V	80	Included
89056-MKS	MKS/NDL/5S/50K	25W	1778+-	5000K	120-277	Phase & 0-10V	80	Included

Downlights

Commercial Series

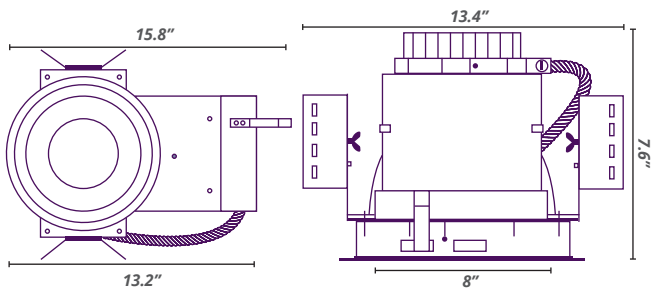
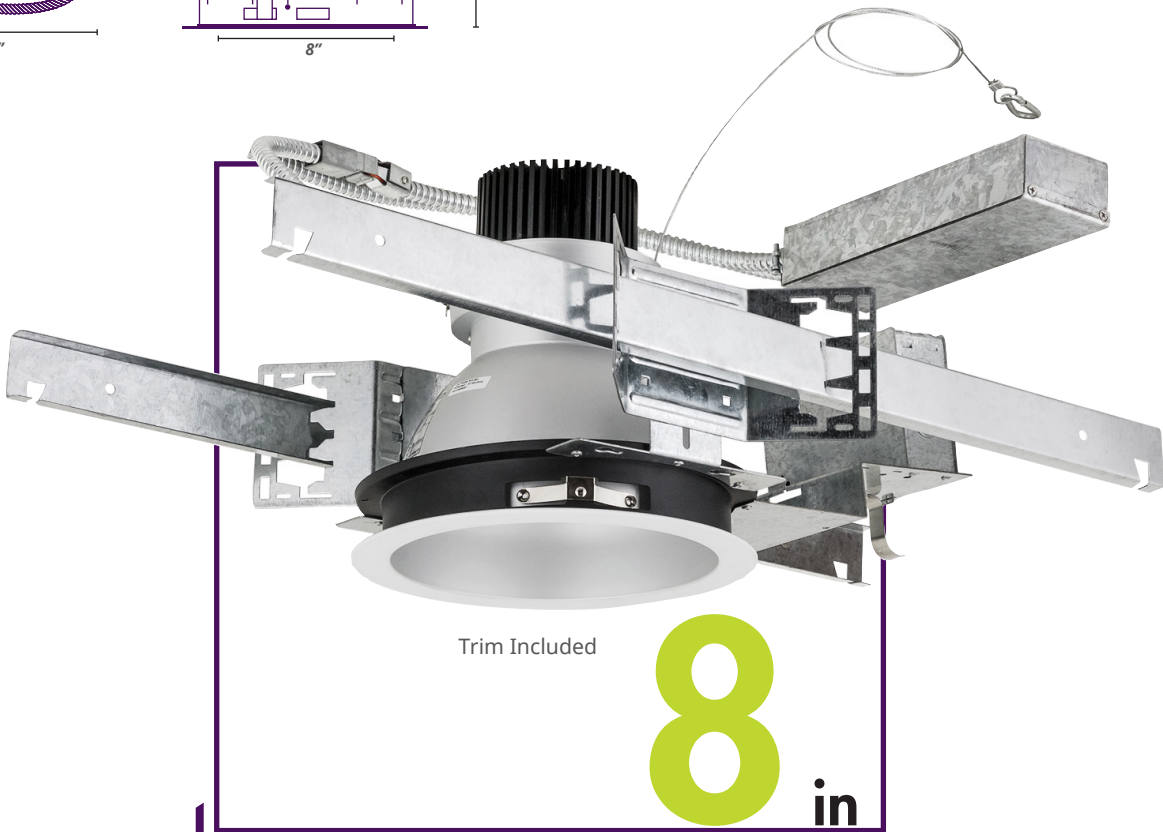


CREE Chip 45 Watts | 4000 Lumens


- Features:**
- A heat dissipator for passive cooling and a body made of die-cast aluminum
 - Cree LED chip with 40,000 hours life span
 - Round trim included with fixture


Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Trim
89912-MKS	MKS/NDL/8R/30K	45W	3200+-	3000K	120-277	Phase & 0-10V	83	Included
89913-MKS	MKS/NDL/8R/40K	45W	4000+-	4000K	120-277	Phase & 0-10V	83	Included

MKS Downlights
Architectural Series

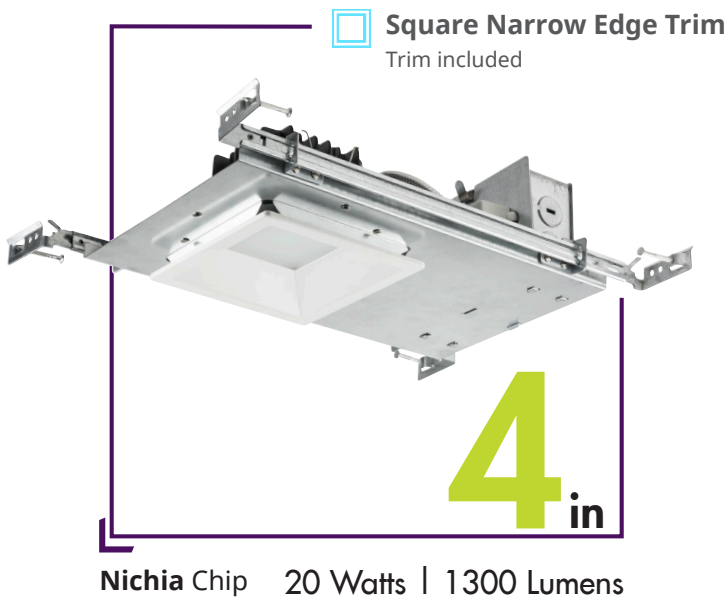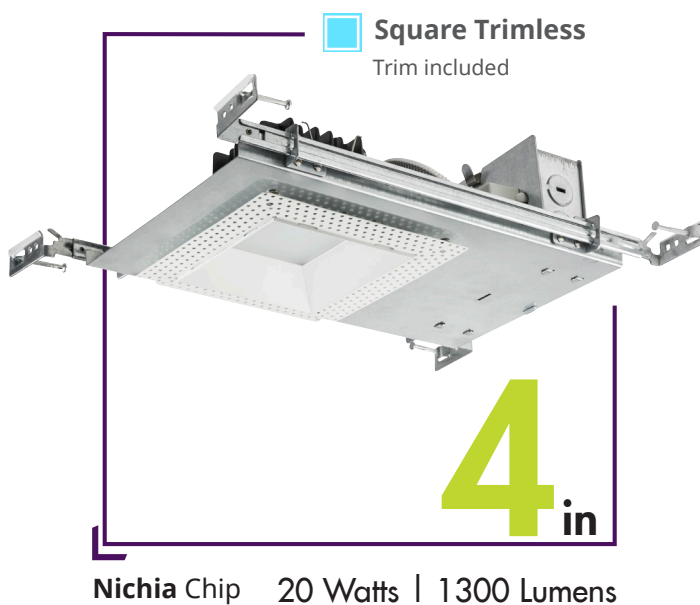

30° Adjustable angle

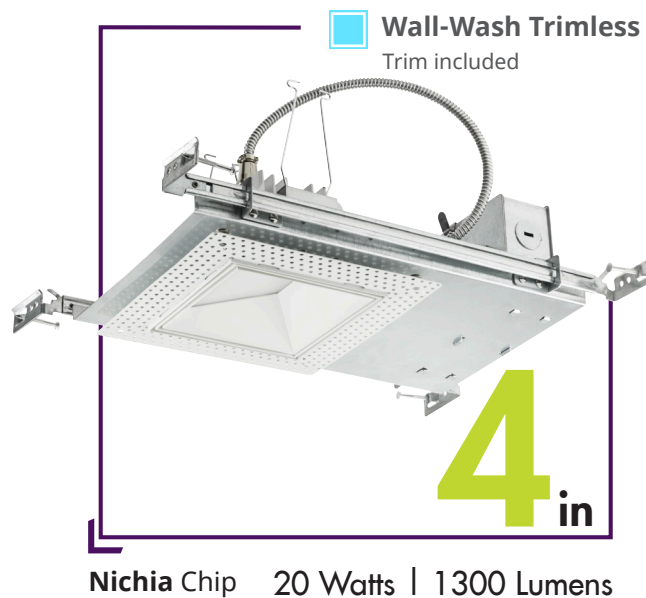

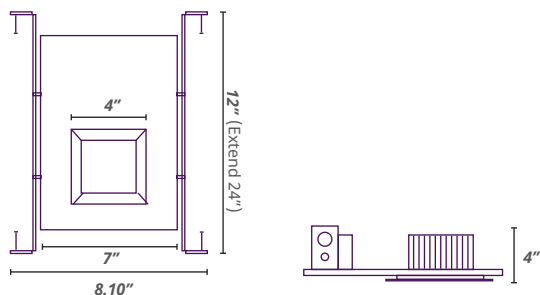

Downlights

Architectural Series

Features:

- A body made of die-cast aluminum allows passive cooling through heat dissipation
- Nichia LED chip with 40,000 hours life span
- Recessed mounted with a square trimless design
- 90+ CRI available
- Lower and higher lumen packages available upon request (up to 2,000 Lumens)

Square Narrow Edge Trim

Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Trim
89135-MKS	MKS/ADL/4S/TR/27K	20W	1300+-	2700K	90-305	Phase & 0-10V	80	Narrow Edge
89136-MKS	MKS/ADL/4S/TR/30K	20W	1300+-	3000K	90-305	Phase & 0-10V	80	Narrow Edge
89137-MKS	MKS/ADL/4S/TR/35K	20W	1300+-	3500K	90-305	Phase & 0-10V	80	Narrow Edge
89138-MKS	MKS/ADL/4S/TR/40K	20W	1300+-	4000K	90-305	Phase & 0-10V	80	Narrow Edge
89139-MKS	MKS/ADL/4S/TR/50K	20W	1300+-	5000K	90-305	Phase & 0-10V	80	Narrow Edge

Square Trimless

Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Trim
89130-MKS	MKS/ADL/4S/TL/27K	20W	1300+-	2700K	90-305	Phase & 0-10V	80	Trimless
89131-MKS	MKS/ADL/4S/TL/30K	20W	1300+-	3000K	90-305	Phase & 0-10V	80	Trimless
89132-MKS	MKS/ADL/4S/TL/35K	20W	1300+-	3500K	90-305	Phase & 0-10V	80	Trimless
89133-MKS	MKS/ADL/4S/TL/40K	20W	1300+-	4000K	90-305	Phase & 0-10V	80	Trimless
89134-MKS	MKS/ADL/4S/TL/50K	20W	1300+-	5000K	90-305	Phase & 0-10V	80	Trimless

Wall-Wash Trimless

Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Trim
89140-MKS	MKS/ADL/4SWW/TL/27K	20W	1300+-	2700K	90-305	Phase & 0-10V	80	Trimless
89141-MKS	MKS/ADL/4SWW/TL/30K	20W	1300+-	3000K	90-305	Phase & 0-10V	80	Trimless
89142-MKS	MKS/ADL/4SWW/TL/35K	20W	1300+-	3500K	90-305	Phase & 0-10V	80	Trimless
89143-MKS	MKS/ADL/4SWW/TL/40K	20W	1300+-	4000K	90-305	Phase & 0-10V	80	Trimless
89245-MKS	MKS/ADL/4SWW/TL/50K	20W	1300+-	5000K	90-305	Phase & 0-10V	80	Trimless



Please contact us for part numbers, pricing, and availability.

MKS Downlight Trims

Round



Size	Item#	Description	Finish	Wet Rated Item#	Feature
3"	88490-MKS	MKS/DLT/3R/WH	White	88505-MKS	-
	88491-MKS	MKS/DLT/3R/BN	Brush Nickel	88567-MKS	-
	88492-MKS	MKS/DLT/3R/CB	Copper Bronze	88565-MKS	-
	88493-MKS	MKS/DLT/3RWW/WH	White	88493-MKS	Wall Wash
4"	88500-MKS	MKS/DLT/4R/WH	White	88502-MKS	-
	88538-MKS	MKS/DLT/4R/BK	Black	88539-MKS	-
	88503-MKS	MKS/DLT/4R/BN	Brush Nickel	88504-MKS	-
	88506-MKS	MKS/DLT/4R/CB	Copper Bronze	88507-MKS	-
	88600-MKS	MKS/DLT/4RWW/WH	White	88600-MKS	Wall Wash
5"	88523-MKS	MKS/DLT/5R/WH	White	88524-MKS	*
	88526-MKS	MKS/DLT/5R/BN	Brush Nickel	88518-MKS	*
	88527-MKS	MKS/DLT/5R/CB	Copper Bronze	88519-MKS	*
	88528-MKS	MKS/DLT/5R/NC/WH	White	-	**
6"	88540-MKS	MKS/DLT/6R/WH	White	88541-MKS	-
	88548-MKS	MKS/DLT/6R/BK	Black	88549-MKS	-
	88543-MKS	MKS/DLT/6R/BN	Brush Nickel	88544-MKS	-
	88610-MKS	MKS/DLT/6RWW/WH	White	-	Wall Wash



* Please note that these trims only work with 5" remodel fixtures


** Please note that these trims are replacement trims for the new construction trims included with each 5" fixture



Wet Rated trims available for all models above. Please visit mksled.com

Downlight Trims

Square



Size	Item#	Description	Finish	Wet Rated Item #	Feature
3"	88495-MKS	MKS/DLT/3S/WH	White	88563-MKS	-
	88496-MKS	MKS/DLT/3S/BN	Brush Nickel	88566-MKS	-
	88497-MKS	MKS/DLT/3S/CB	Copper Bronze	88564-MKS	-
4"	88510-MKS	MKS/DLT/4S/WH	White	88511-MKS	-
	88537-MKS	MKS/DLT/4S/BK	Black	88536-MKS	-
	88513-MKS	MKS/DLT/4S/BN	Brush Nickel	88514-MKS	-
	88516-MKS	MKS/DLT/4S/CB	Copper Bronze	88517-MKS	-
5"	88520-MKS	MKS/DLT/5S/WH	White	88521-MKS	*
	88529-MKS	MKS/DLT/5S/BN	Brush Nickel	88522-MKS	*
	88530-MKS	MKS/DLT/5S/CB	Copper Bronze	88531-MKS	*
	88525-MKS	MKS/DLT/5S/NC/WH	White	-	**
6"	88550-MKS	MKS/DLT/6S/WH	White	88551-MKS	-
	88558-MKS	MKS/DLT/6S/BK	Black	88559-MKS	-
	88553-MKS	MKS/DLT/6S/BN	Brush Nickel	88554-MKS	-
	88556-MKS	MKS/DLT/6S/CB	Copper Bronze	88557-MKS	-

* Please note that these trims only work with 5" remodel fixtures


** Please note that these trims are replacement trims for the new construction trims included with each 5" fixture



Wet Rated trims available for all models above. Please visit mksled.com


MKS Downlights

Multi-Head Series

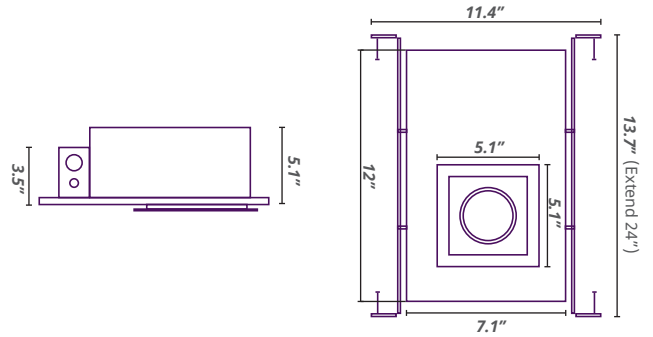

Trimless | Narrow Edge

Available in black and white finish

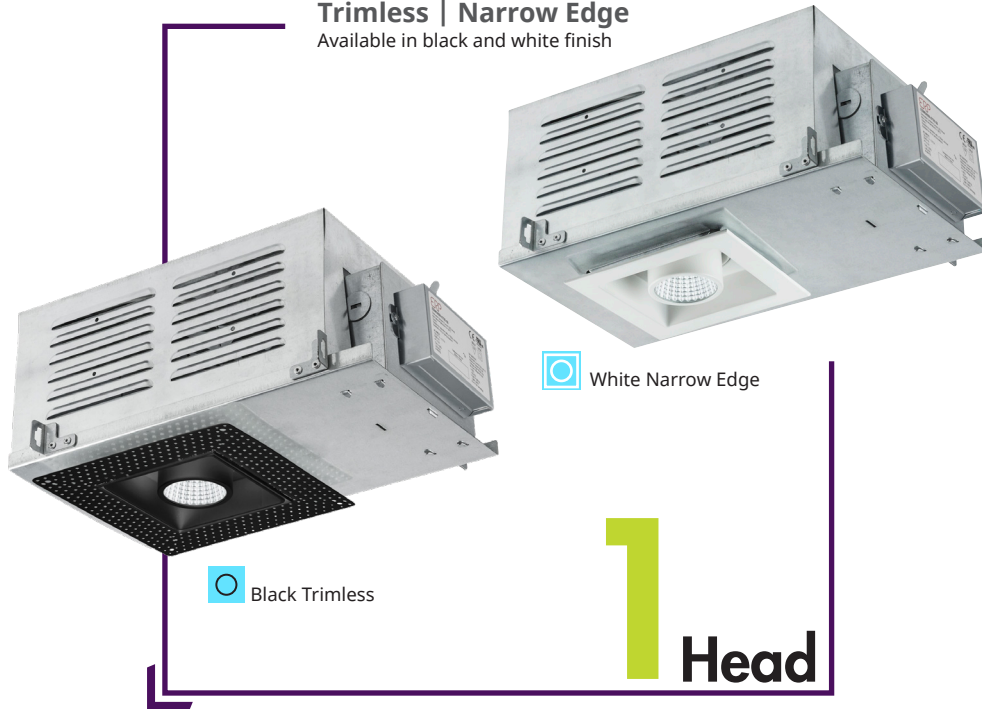

Black Trimless

White Narrow Edge

CREE Chip

12 Watts | 1034 Lumens

Features:

- A body made of die-cast aluminum allows passive cooling through heat dissipation
- CREE LED chip with 40,000 hours life span
- Two-axis gimble to rotate 359° and tilt 25°
- Two mounting options, trimmed or timeless



White Trimless



Black Narrow Edge



White Narrow Edge

Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Type
89163-MKS	MKS/MDL/1H/TR/WH/27K	12W	1034+-	2700K	90-305	Phase & 0-10V	84	Trim
89161-MKS	MKS/MDL/1H/TR/WH/30K	12W	1034+-	3000K	90-305	Phase & 0-10V	84	Trim
89164-MKS	MKS/MDL/1H/TR/WH/35K	12W	1034+-	3500K	90-305	Phase & 0-10V	84	Trim
89162-MKS	MKS/MDL/1H/TR/WH/40K	12W	1034+-	4000K	90-305	Phase & 0-10V	84	Trim



White Trimless

Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Type
89175-MKS	MKS/MDL/1H/TR/WH/50K	12W	1034+-	5000K	90-305	Phase & 0-10V	84	Trim
89273-MKS	MKS/MDL/1H/TL/WH/27K	12W	1034+-	2700K	90-305	Phase & 0-10V	84	Trimless
89166-MKS	MKS/MDL/1H/TL/WH/30K	12W	1034+-	3000K	90-305	Phase & 0-10V	84	Trimless
89178-MKS	MKS/MDL/1H/TL/WH/35K	12W	1034+-	3500K	90-305	Phase & 0-10V	84	Trimless
89168-MKS	MKS/MDL/1H/TL/WH/40K	12W	1034+-	4000K	90-305	Phase & 0-10V	84	Trimless



Black Narrow Edge

Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Type
89229-MKS	MKS/MDL/1H/TL/WH/50K	12W	1034+-	5000K	90-305	Phase & 0-10V	84	Trimless
89260-MKS	MKS/MDL/1H/TR/BK/27K	12W	1034+-	2700K	90-305	Phase & 0-10V	84	Trim
89261-MKS	MKS/MDL/1H/TR/BK/30K	12W	1034+-	3000K	90-305	Phase & 0-10V	84	Trim
89263-MKS	MKS/MDL/1H/TR/BK/35K	12W	1034+-	3500K	90-305	Phase & 0-10V	84	Trim
89262-MKS	MKS/MDL/1H/TR/BK/40K	12W	1034+-	4000K	90-305	Phase & 0-10V	84	Trim



Black Trimless


Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Type
89264-MKS	MKS/MDL/1H/TR/BK/50K	12W	1034+-	5000K	90-305	Phase & 0-10V	84	Trim
89265-MKS	MKS/MDL/1H/TL/BK/27K	12W	1034+-	2700K	90-305	Phase & 0-10V	84	Trimless
89266-MKS	MKS/MDL/1H/TL/BK/30K	12W	1034+-	3000K	90-305	Phase & 0-10V	84	Trimless
89267-MKS	MKS/MDL/1H/TL/BK/35K	12W	1034+-	3500K	90-305	Phase & 0-10V	84	Trimless
89268-MKS	MKS/MDL/1H/TL/BK/40K	12W	1034+-	4000K	90-305	Phase & 0-10V	84	Trimless
89269-MKS	MKS/MDL/1H/TL/BK/50K	12W	1034+-	5000K	90-305	Phase & 0-10V	84	Trimless



Optional backup battery system available upon request


MKS Downlights

Multi-Head Series

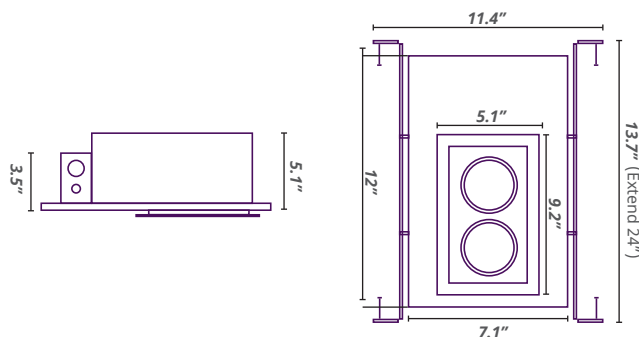

Trimless | Narrow Edge

Available in black and white finish

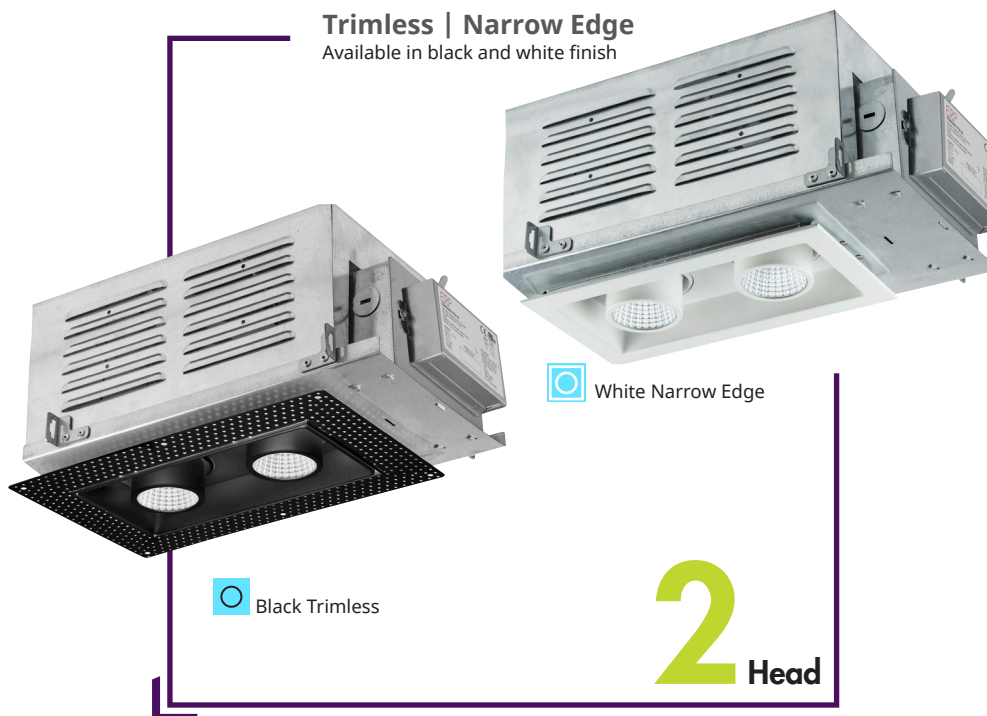

CREE Chip

24 Watts | 1900 Lumens

Features:

- A body made of die-cast aluminum allows passive cooling through heat dissipation
- CREE LED chip with 40,000 hours life span
- Two-axis gimble to rotate 359° and tilt 25°
- Two mounting options, trimmed or timeless





White Narrow Edge

Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Type
89180-MKS	MKS/MDL/2H/TR/WH/27K	24W	1900+-	2700K	90-305	Phase & 0-10V	84	Trim
89181-MKS	MKS/MDL/2H/TR/WH/30K	24W	1900+-	3000K	90-305	Phase & 0-10V	84	Trim
89182-MKS	MKS/MDL/2H/TR/WH/35K	24W	1900+-	3500K	90-305	Phase & 0-10V	84	Trim
89183-MKS	MKS/MDL/2H/TR/WH/40K	24W	1900+-	4000K	90-305	Phase & 0-10V	84	Trim
89184-MKS	MKS/MDL/2H/TR/WH/50K	24W	1900+-	5000K	90-305	Phase & 0-10V	84	Trim



White Trimless

Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Type
89185-MKS	MKS/MDL/2H/TL/WH/27K	24W	1900+-	2700K	90-305	Phase & 0-10V	84	Trimless
89186-MKS	MKS/MDL/2H/TL/WH/30K	24W	1900+-	3000K	90-305	Phase & 0-10V	84	Trimless
89187-MKS	MKS/MDL/2H/TL/WH/35K	24W	1900+-	3500K	90-305	Phase & 0-10V	84	Trimless
89189-MKS	MKS/MDL/2H/TL/WH/40K	24W	1900+-	4000K	90-305	Phase & 0-10V	84	Trimless
89228-MKS	MKS/MDL/2H/TL/WH/50K	24W	1900+-	5000K	90-305	Phase & 0-10V	84	Trimless



Black Narrow Edge

Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Type
89280-MKS	MKS/MDL/2H/TR/BK/27K	24W	1900+-	2700K	90-305	Phase & 0-10V	84	Trim
89281-MKS	MKS/MDL/2H/TR/BK/30K	24W	1900+-	3000K	90-305	Phase & 0-10V	84	Trim
89284-MKS	MKS/MDL/2H/TR/BK/35K	24W	1900+-	3500K	90-305	Phase & 0-10V	84	Trim
89282-MKS	MKS/MDL/2H/TR/BK/40K	24W	1900+-	4000K	90-305	Phase & 0-10V	84	Trim
89283-MKS	MKS/MDL/2H/TR/BK/50K	24W	1900+-	5000K	90-305	Phase & 0-10V	84	Trim



Black Trimless


Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Type
89285-MKS	MKS/MDL/2H/TL/BK/27K	24W	1900+-	2700K	90-305	Phase & 0-10V	84	Trimless
89286-MKS	MKS/MDL/2H/TL/BK/30K	24W	1900+-	3000K	90-305	Phase & 0-10V	84	Trimless
89288-MKS	MKS/MDL/2H/TL/BK/35K	24W	1900+-	3500K	90-305	Phase & 0-10V	84	Trimless
89287-MKS	MKS/MDL/2H/TL/BK/40K	24W	1900+-	4000K	90-305	Phase & 0-10V	84	Trimless
89289-MKS	MKS/MDL/2H/TL/BK/50K	24W	1900+-	5000K	90-305	Phase & 0-10V	84	Trimless



Optional backup battery system available upon request

MKS Downlights

Multi-Head Series

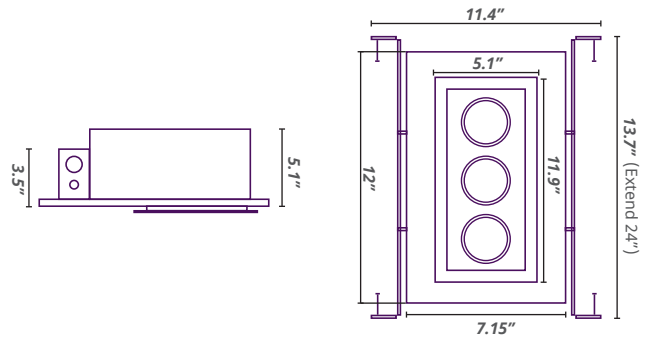

Trimless | Narrow Edge
Available in black and white finish



White Narrow Edge

Black Trimless

3 Head

Features:

- A body made of die-cast aluminum allows passive cooling through heat dissipation
- CREE LED chip with 40,000 hours life span
- Two-axis gimble to rotate 359° and tilt 25°
- Two mounting options, trimmed or timeless

CREE Chip


36 Watts | 2900 Lumens

Trimless | Narrow Edge



White Narrow Edge

4 Head

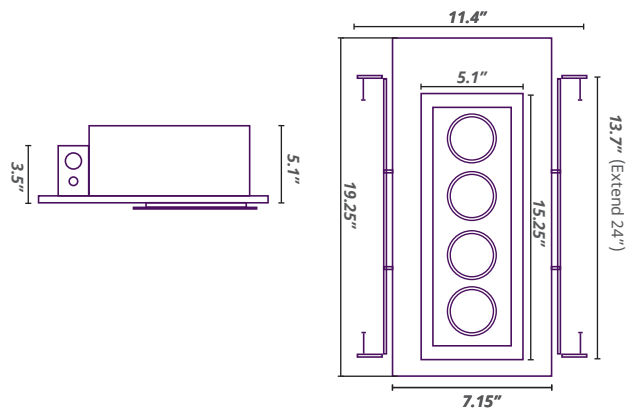

CREE Chip

48 Watts | 4250 Lumens



(3 Heads) White Narrow Edge

Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Type
89190-MKS	MKS/MDL/3H/TR/WH/27K	36W	2900+-	2700K	90-305	Phase & 0-10V	84	Trim
89191-MKS	MKS/MDL/3H/TR/WH/30K	36W	2900+-	3000K	90-305	Phase & 0-10V	84	Trim
89193-MKS	MKS/MDL/3H/TR/WH/35K	36W	2900+-	3500K	90-305	Phase & 0-10V	84	Trim
89192-MKS	MKS/MDL/3H/TR/WH/40K	36W	2900+-	4000K	90-305	Phase & 0-10V	84	Trim
89194-MKS	MKS/MDL/3H/TR/WH/50K	36W	2900+-	5000K	90-305	Phase & 0-10V	84	Trim



(3 Heads) Black Narrow Edge

Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Type
89290-MKS	MKS/MDL/3H/TR/BK/27K	36W	2900+-	2700K	90-305	Phase & 0-10V	84	Trim
89291-MKS	MKS/MDL/3H/TR/BK/30K	36W	2900+-	3000K	90-305	Phase & 0-10V	84	Trim
89293-MKS	MKS/MDL/3H/TR/BK/35K	36W	2900+-	3500K	90-305	Phase & 0-10V	84	Trim
89292-MKS	MKS/MDL/3H/TR/BK/40K	36W	2900+-	4000K	90-305	Phase & 0-10V	84	Trim
89294-MKS	MKS/MDL/3H/TR/BK/50K	36W	2900+-	5000K	90-305	Phase & 0-10V	84	Trim



(3 Heads) Black Trimless

Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Type
89295-MKS	MKS/MDL/3H/TL/BK/27K	36W	2900+-	2700K	90-305	Phase & 0-10V	84	Trimless
89296-MKS	MKS/MDL/3H/TL/BK/30K	36W	2900+-	3000K	90-305	Phase & 0-10V	84	Trimless
89297-MKS	MKS/MDL/3H/TL/BK/35K	36W	2900+-	3500K	90-305	Phase & 0-10V	84	Trimless
89298-MKS	MKS/MDL/3H/TL/BK/40K	36W	2900+-	4000K	90-305	Phase & 0-10V	84	Trimless
89299-MKS	MKS/MDL/3H/TL/BK/50K	36W	2900+-	5000K	90-305	Phase & 0-10V	84	Trimless



(4 Heads) White Narrow Edge


Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Type
99190-MKS	MKS/MDL/4H/TR/WH/27K	48W	4250+-	2700K	90-305	Phase & 0-10V	84	Trim
99191-MKS	MKS/MDL/4H/TR/WH/30K	48W	4250+-	3000K	90-305	Phase & 0-10V	84	Trim
99192-MKS	MKS/MDL/4H/TR/WH/35K	48W	4250+-	3500K	90-305	Phase & 0-10V	84	Trim
99193-MKS	MKS/MDL/4H/TR/WH/40K	48W	4250+-	4000K	90-305	Phase & 0-10V	84	Trim
99194-MKS	MKS/MDL/4H/TR/WH/50K	48W	4250+-	5000K	90-305	Phase & 0-10V	84	Trim



Optional backup battery system
available upon request


MKS Downlights

Contemporary Series

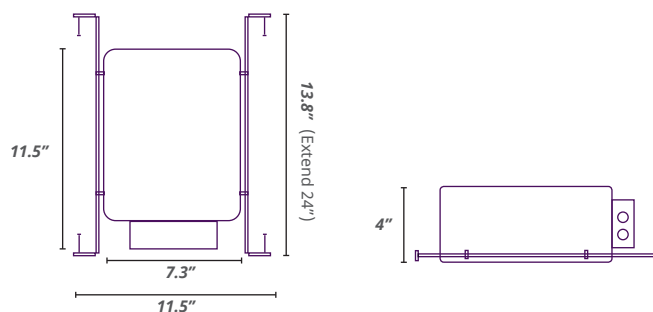

Single | Double

Available in round or square

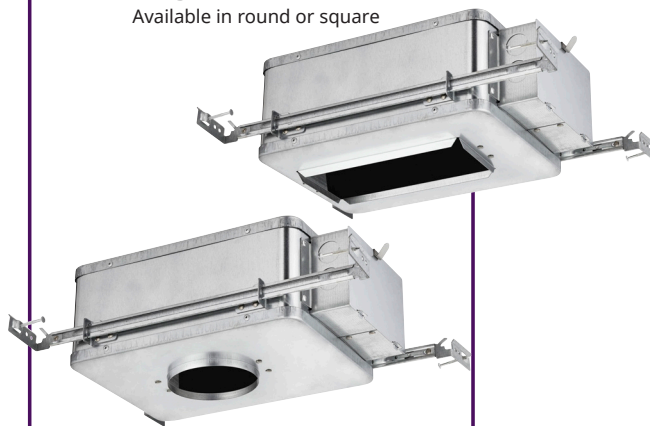

Light Engine

2700K | 3000K | 3500K | 4000K



2 in

CREE Chip 9 Watts | 700 Lumens

Features:

- A body made of die-cast aluminum allows passive cooling through heat dissipation
- Cree LED chip with 40,000 hours life span

Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Beam°
99810-MKS	MKS/CSD/LE/27K	9W	700	2700K	120-277	0-10V	80	38
99811-MKS	MKS/CSD/LE/30K	9W	700	3000K	120-277	0-10V	80	38
99812-MKS	MKS/CSD/LE/35K	9W	700	3500K	120-277	0-10V	80	38
99813-MKS	MKS/CSD/LE/40K	9W	700	4000K	120-277	0-10V	80	38

Features:


- Recessed mounted with one or two, round or square lights available

Item#	Description	Shape	Type	Height	Depth	Width
99801-MKS	MKS/CSD/HNC/1R	Round	Single	4"	8.09"	12"
99803-MKS	MKS/CSD/HNC/1S	Square	Single	4"	8.09"	12"
99851-MKS	MKS/CSD/HNC/2R	Round	Double	4"	8.09"	12"
99853-MKS	MKS/CSD/HNC/2S	Square	Double	4"	8.09"	12"

Trims and Accessories




Single Trim (Smooth)



Shape	Item#	Description	Type	Style	Size
Round	99820-MKS	MKS/CSD/TS/1R/SM	Single	Smooth	2"
Square	99821-MKS	MKS/CSD/TS/1S/SM	Single	Smooth	2"




Double Trim (Smooth)



Shape	Item#	Description	Type	Style	Size
Round	99870-MKS	MKS/CSD/TD/2R/SM	Double	Smooth	2"
Square	99871-MKS	MKS/CSD/TD/2S/SM	Double	Smooth	2"




Single Trim (Stepped)



Shape	Item#	Description	Type	Style	Size
Round	99825-MKS	MKS/CSD/TS/1R/ST	Single	Stepped	2"
Square	99826-MKS	MKS/CSD/TS/1S/ST	Single	Stepped	2"



Double Trim (Stepped)



Shape	Item#	Description	Type	Style	Size
Round	99875-MKS	MKS/CSD/TD/2R/ST	Double	Stepped	2"
Square	99876-MKS	MKS/CSD/TD/2S/ST	Double	Stepped	2"

Accessories

The Contemporary Series LED Downlights feature accessories to help achieve your perfect lighting requirements.



Snoot

Use snoot to control lighting direction.

Item#	Description	Finish
99883-MKS	MKS/CSD/AS/WH	White



Extenders

Use extender to recess the light source deeper into the ceiling and decrease light blinding.

Item#	Description	Finish
99882-MKS	MKS/CSD/AE/BK	Black
99881-MKS	MKS/CSD/AE/SL	Silver

Louver

Use louver to reduce lighting glare.

Item#	Description	Finish
99880-MKS	MKS/CSD/LO/BK	Black





Features:


- A body made of die-cast aluminum allows passive cooling through heat dissipation
- Cree LED chip with 40,000 hours life span

7 Watts

Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI
91910-MKS	MKS/DSE/7W/27K	7W	700	2700K	90-305	Phase & 0-10V	84
91911-MKS	MKS/DSE/7W/30K	7W	700	3000K	90-305	Phase & 0-10V	84
91912-MKS	MKS/DSE/7W/35K	7W	700	3500K	90-305	Phase & 0-10V	84
91913-MKS	MKS/DSE/7W/40K	7W	700	4000K	90-305	Phase & 0-10V	84
91914-MKS	MKS/DSE/7W/50K	7W	700	5000K	90-305	Phase & 0-10V	84

12 Watts

Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI
91915-MKS	MKS/DS/LED/12W	12W	1200	2700K	90-305	Phase & 0-10V	84
91916-MKS	MKS/DS/LED/12W	12W	1200	3000K	90-305	Phase & 0-10V	84
91917-MKS	MKS/DS/LED/12W	12W	1200	3500K	90-305	Phase & 0-10V	84
91918-MKS	MKS/DS/LED/12W	12W	1200	4000K	90-305	Phase & 0-10V	84
91919-MKS	MKS/DS/LED/12W	12W	1200	5000K	90-305	Phase & 0-10V	84



Trimless | Narrow Edge

Available in round and square

Housing (Narrow Edge)

Features:

- Recessed mounted with round or square trims available

Item#	Description	Compatibility	Shape	Type
91902-MKS	MKS/DSH/7W/TRR	7 Watt	Round	Trim
91903-MKS	MKS/DSH/7W/TRS	7 Watt	Square	Trim
91922-MKS	MKS/DSH/12W/TRR	12 Watt	Round	Trim
91923-MKS	MKS/DSH/12W/TRS	12 Watt	Square	Trim

Housing (Trimless)

Item#	Description	Compatibility	Shape	Type
91900-MKS	MKS/DSH/7W/TLR	7 Watt	Round	Trimless
91901-MKS	MKS/DSH/7W/TLS	7 Watt	Square	Trimless
91920-MKS	MKS/DSH/12W/TLR	12 Watt	Round	Trimless
91921-MKS	MKS/DSH/12W/TLS	12 Watt	Square	Trimless

MKS Downlight Trims

Square




Shape	Item#	Description	Finish	Reflector	Trim Type
Square White Trim	91973-MKS	MKS/DST/TRS/NR/MGO/WH	Matte	Gold	Narrow
	91972-MKS	MKS/DST/TRS/NR/RGO/WH	Reflective	Gold	Narrow
	91974-MKS	MKS/DST/TRS/NR/RRG/WH	Reflective	Rose Gold	Narrow



Shape	Item#	Description	Finish	Reflector	Trim Type
Square White Trim	91987-MKS	MKS/DST/TRS/WW/MGO/WH	Matte	Gold	Wall Wash
	91986-MKS	MKS/DST/TRS/WW/RGO/WH	Reflective	Gold	Wall Wash
	91988-MKS	MKS/DST/TRS/WW/RRG/WH	Reflective	Rose Gold	Wall Wash



Shape	Item#	Description	Finish	Reflector	Trim Type
Square Trimless	91952-MKS	MKS/DST/TLS/MBK/BK	Matte	Black	Trimless
	91948-MKS	MKS/DST/TLS/MGO/WH	Matte	Gold	Trimless
	91946-MKS	MKS/DST/TLS/MSL/WH	Matte	Silver	Trimless
	91944-MKS	MKS/DST/TLS/MWH/WH	Matte	White	Trimless
	91947-MKS	MKS/DST/TLS/RGO/WH	Reflective	Gold	Trimless
	91949-MKS	MKS/DST/TLS/RRG/WH	Reflective	Rose Gold	Trimless
	91945-MKS	MKS/DST/TLS/RSL/WH	Reflective	Silver	Trimless




This die-cast square trim has a dual axis gimble with a 25-degree tilt.

Shape	Item#	Description	Finish	Reflector	Trim Type
Square Trim	91959-MKS	MKS/DST/TRS/AD/MWH/WH	Matte	White	Adjustable





Downlights Trims

Round





Shape	Item#	Description	Finish	Reflector	Trim Type
Round White Trim	91966-MKS	MKS/DST/TRR/NR/MGO/WH	Matte	Gold	Narrow
	91965-MKS	MKS/DST/TRR/NR/RGO/WH	Reflective	Gold	Narrow
	91967-MKS	MKS/DST/TRR/NR/RRG/WH	Reflective	Rose Gold	Narrow



Shape	Item#	Description	Finish	Reflector	Trim Type
Round White Trim	91980-MKS	MKS/DST/TRR/WW/MGO/WH	Matte	Gold	Wall Wash
	91979-MKS	MKS/DST/TRR/WW/RGO/WH	Reflective	Gold	Wall Wash
	91981-MKS	MKS/DST/TRR/WW/RRG/WH	Reflective	Rose Gold	Wall Wash



Shape	Item#	Description	Finish	Reflector	Trim Type
White Round Trimless	91934-MKS	MKS/DST/TLR/MGO/WH	Matte	Gold	Trimless
	91932-MKS	MKS/DST/TLR/MSL/WH	Matte	Silver	Trimless
	91930-MKS	MKS/DST/TLR/MWH/WH	Matte	White	Trimless
	91933-MKS	MKS/DST/TLR/RGO/WH	Reflective	Gold	Trimless
	91935-MKS	MKS/DST/TLR/RRG/WH	Reflective	Rose Gold	Trimless
	91931-MKS	MKS/DST/TLR/RSL/WH	Reflective	Silver	Trimless




This die-cast round trim has a dual axis gimble with a 25-degree tilt.

Shape	Item#	Description	Finish	Reflector	Trim Type
Round Trim	91958-MKS	MKS/DST/TRR/AD/MWH/WH	Matte	White	Adjustable



MKS Downlight Trims

Round



Shape	Item#	Description	Finish	Reflector	Trim Type
Classic Round Trim	91962-MKS	MKS/DST/TRR/CL/MBK/WH	Matte	Black	Classic
	92905-MKS	MKS/DST/TRR/CL/MSL/WH	Matte	Silver	Classic
	91961-MKS	MKS/DST/TRR/CL/MWH/WH	Matte	White	Classic
	91964-MKS	MKS/DST/TRR/CL/RGO/WH	Reflective	Gold	Classic
	91963-MKS	MKS/DST/TRR/CL/RSL/WH	Reflective	Silver	Classic




Shape	Item#	Description	Finish	Reflector	Trim Type
Eye Lid Round Trim	91995-MKS	MKS/DST/TRR/CO/MBK/WH	Matte	Black	Cut Off
	91989-MKS	MKS/DST/TRR/CO/MGO/WH	Matte	Gold	Cut Off
	91994-MKS	MKS/DST/TRR/CO/MWH/WH	Matte	White	Cut Off
	91993-MKS	MKS/DST/TRR/CO/RSL/WH	Reflective	Silver	Cut Off




Shape	Item#	Description	Finish	Reflector	Trim Type
Slotted Round Trim	92901-MKS	MKS/DST/TRR/SL/MBK/WH	Matte	Black	Slotted
	92900-MKS	MKS/DST/TRR/SL/MWH/WH	Matte	White	Slotted
	92902-MKS	MKS/DST/TRR/SL/RSL/WH	Reflective	Silver	Slotted



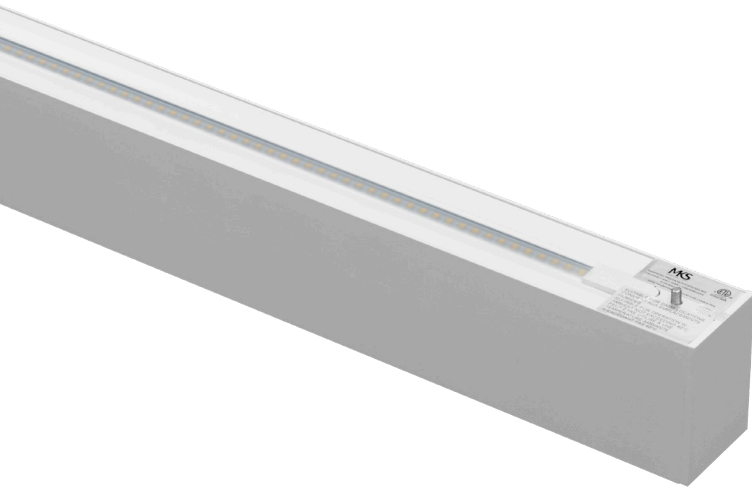


Direct Light & Indirect Light

The MKS direct and indirect line of linear fixtures is the ideal office lighting fixture for necessary light levels in a workspace as well as ambient illumination throughout the office.

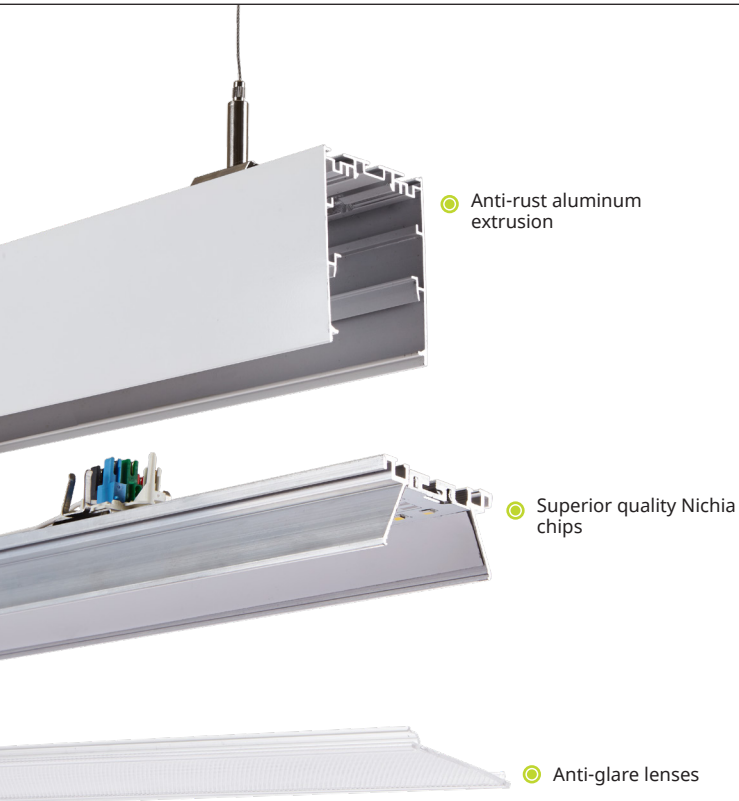

Quality Built

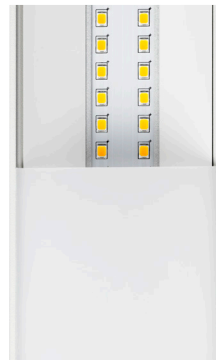

Nichia Chip

Delivers superior quality light

MKS is committed to delivering quality products to our customers. Therefore, MKS products are built using industry-leading components such as Nichia.



The driver is multi-volt (120-277v) with 0-10v dimming.





MKS Limited Warranty covers against component defects in materials and workmanship for a period of 5 years from the date of purchase.



An optional backup battery system is available upon request. (Remote application)

MKS Linear Fixtures

Up and Down Series

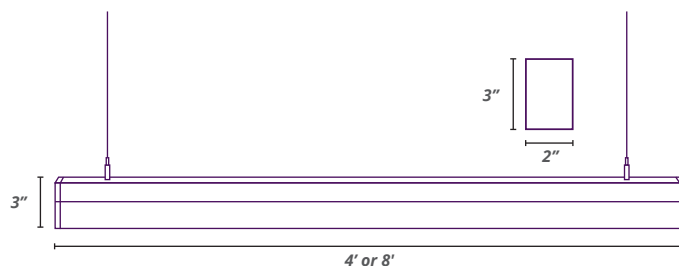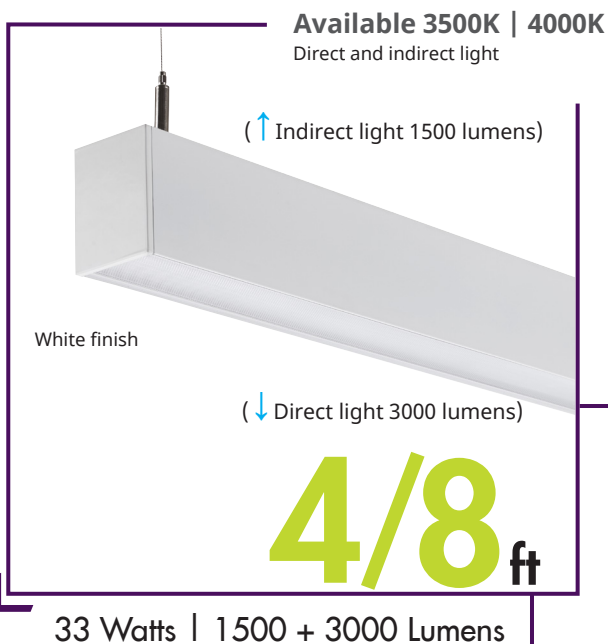

Direct Light & Indirect Light

The MKS direct and indirect line of linear fixtures is the ideal office lighting fixture for necessary light levels in a workspace as well as ambient illumination throughout the office.



Features:

- A body made of die-cast aluminum allows heat dissipation
- Anti-glare lenses
- 4-foot length
- Contains two lights for up (1,500 LM) and down (3,000 LM) lighting
- Suspension wires included



White finish

Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Size
81443-MKS	MKS/ALD/8/40K	66W	↑3000 + ↓6000	4000K	100-227	0-10V	80+	8'

Silver finish

Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Size
81234-MKS	MKS/ALD/4/35K	33W	↑1500 + ↓3000	3500K	100-227	0-10V	80+	4'
81235-MKS	MKS/ALD/4/40K	33W	↑1500 + ↓3000	4000K	100-227	0-10V	80+	4'

Direct Light Series

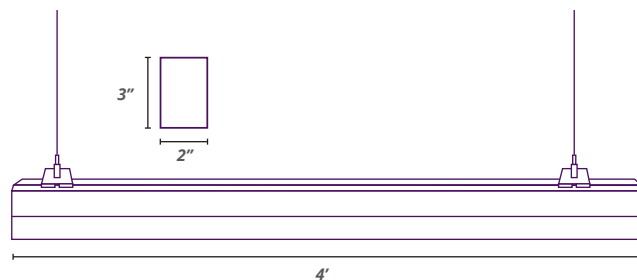

57 Watts | 8000 Lumens


Features:

- A body made of die-cast aluminum allows passive cooling through heat dissipation
- Anti-glare lenses
- Available 4 FT & 8 FT
- Suspension wires and end caps included

Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Size
81449-MKS	MKS/ALS/29W/4FT/40K/WH	29W	4000	4000K	100-227	0-10V	80+	4'



MKS Cylinders

Pendants Series

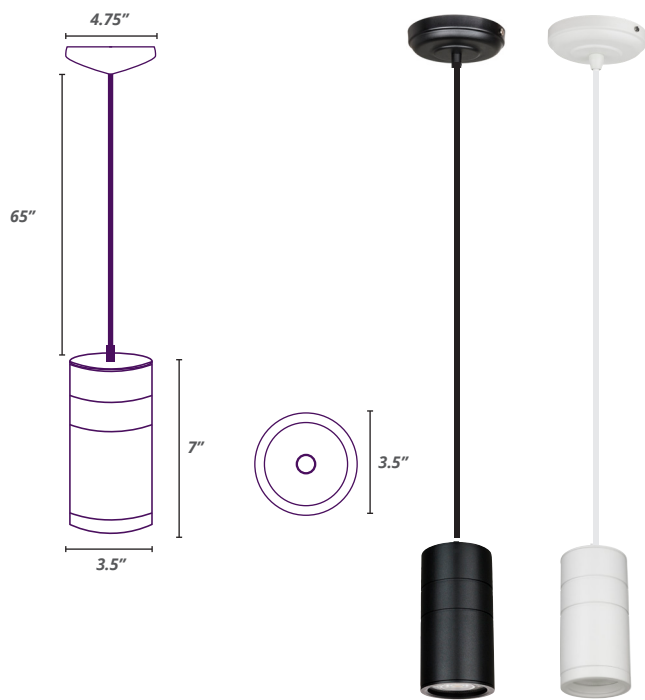

Features:

- A body made of die-cast aluminum allows passive cooling through heat dissipation
- Cree COB LED chip with 50,000 hours life span
- Cord length of 65 inches
- Black or white finishes

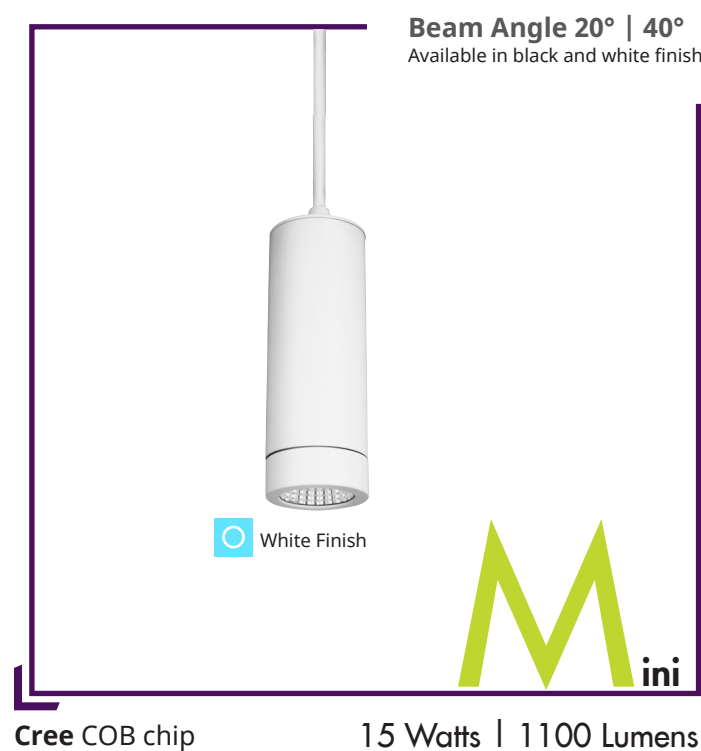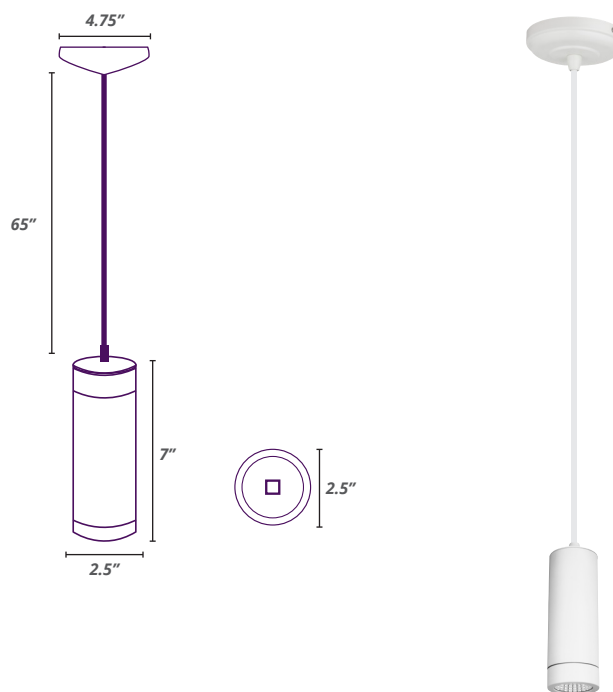

Features:

- A body made of die-cast aluminum allows passive cooling through heat dissipation
- Cree COB LED chip with 50,000 hours life span
- Cord length of 65 inches
- Black or white finishes

Black Finish (Standard)

Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Beam °
Beam Angle 24°								
89405-MKS	MKS/CP/20W/24D/BK/27K	20W	1390+-	2700K	90-305	Phase & 0-10V	80	24°
89406-MKS	MKS/CP/20W/24D/BK/30K	20W	1390+-	3000K	90-305	Phase & 0-10V	80	24°
89407-MKS	MKS/CP/20W/24D/BK/35K	20W	1390+-	3500K	90-305	Phase & 0-10V	80	24°
89408-MKS	MKS/CP/20W/24D/BK/40K	20W	1390+-	4000K	90-305	Phase & 0-10V	80	24°
Beam Angle 38°								
89400-MKS	MKS/CP/20W/38D/BK/27K	20W	1390+-	2700K	90-305	Phase & 0-10V	80	38°
89401-MKS	MKS/CP/20W/38D/BK/30K	20W	1390+-	3000K	90-305	Phase & 0-10V	80	38°
89402-MKS	MKS/CP/20W/38D/BK/35K	20W	1390+-	3500K	90-305	Phase & 0-10V	80	38°
89403-MKS	MKS/CP/20W/38D/BK/40K	20W	1390+-	4000K	90-305	Phase & 0-10V	80	38°

White Finish (Standard)

Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Beam °
Beam Angle 24°								
89415-MKS	MKS/CP/20W/24D/WH/27K	20W	1390+-	2700K	90-305	Phase & 0-10V	80	24°
89416-MKS	MKS/CP/20W/24D/WH/30K	20W	1390+-	3000K	90-305	Phase & 0-10V	80	24°
89417-MKS	MKS/CP/20W/24D/WH/35K	20W	1390+-	3500K	90-305	Phase & 0-10V	80	24°
89418-MKS	MKS/CP/20W/24D/WH/40K	20W	1390+-	4000K	90-305	Phase & 0-10V	80	24°
Beam Angle 38°								
89410-MKS	MKS/CP/20W/38D/WH/27K	20W	1390+-	2700K	90-305	Phase & 0-10V	80	38°
89411-MKS	MKS/CP/20W/38D/WH/30K	20W	1390+-	3000K	90-305	Phase & 0-10V	80	38°
89412-MKS	MKS/CP/20W/38D/WH/35K	20W	1390+-	3500K	90-305	Phase & 0-10V	80	38°
89413-MKS	MKS/CP/20W/38D/WH/40K	20W	1390+-	4000K	90-305	Phase & 0-10V	80	38°

White Finish (Standard)

Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Beam °
Beam Angle 20°								
99415-MKS	MKS/MCP/15W/20D/WH/27K	15W	1100+-	2700K	90-305	Phase & 0-10V	80	20°
99416-MKS	MKS/MCP/15W/20D/WH/30K	15W	1100+-	3000K	90-305	Phase & 0-10V	80	20°
99417-MKS	MKS/MCP/15W/20D/WH/35K	15W	1100+-	3500K	90-305	Phase & 0-10V	80	20°
99418-MKS	MKS/MCP/15W/20D/WH/40K	15W	1100+-	4000K	90-305	Phase & 0-10V	80	20°
Beam Angle 40°								
99410-MKS	MKS/MCP/15W/40D/WH/27K	15W	1100+-	2700K	90-305	Phase & 0-10V	80	40°
99411-MKS	MKS/MCP/15W/40D/WH/30K	15W	1100+-	3000K	90-305	Phase & 0-10V	80	40°
99412-MKS	MKS/MCP/15W/40D/WH/35K	15W	1100+-	3500K	90-305	Phase & 0-10V	80	40°
99413-MKS	MKS/MCP/15W/40D/WH/40K	15W	1100+-	4000K	90-305	Phase & 0-10V	80	40°

MKS Cylinders

Surface Mount Series

Beam Angle 24° | 38°
Available in black and white finish




White Finish

Black Finish

S **tandard**

Cree COB chip

20 Watts | 1390 Lumens

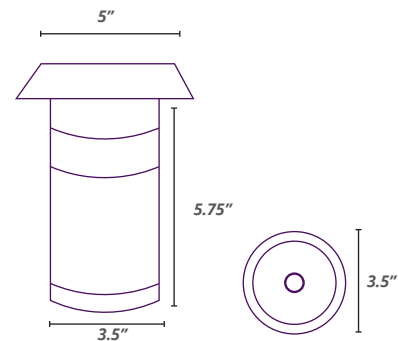

Features:

- A body made of die-cast aluminum allows passive cooling through heat dissipation
- Cree COB LED chip with 50,000 hours life span
- Black or white finishes

Beam Angle 20° | 40°
Available in black and white finish




Black Finish

M **ini**

Cree COB chip

15 Watts | 1100 Lumens

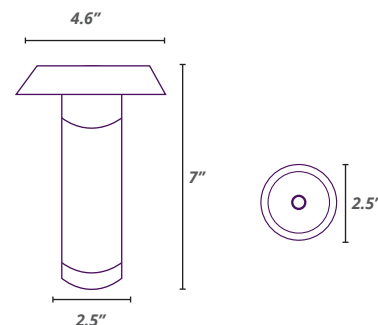

Features:

- A body made of die-cast aluminum allows passive cooling through heat dissipation
- Cree COB LED chip with 50,000 hours life span
- Black or white finishes

Black Finish (Standard)

Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Beam °
Beam Angle 24°								
89465-MKS	MKS/CS/20W/24D/BK/27K	20W	1390+-	2700K	90-305	Phase & 0-10V	80	24°
89466-MKS	MKS/CS/20W/24D/BK/30K	20W	1390+-	3000K	90-305	Phase & 0-10V	80	24°
89467-MKS	MKS/CS/20W/24D/BK/35K	20W	1390+-	3500K	90-305	Phase & 0-10V	80	24°
89468-MKS	MKS/CS/20W/24D/BK/40K	20W	1390+-	4000K	90-305	Phase & 0-10V	80	24°
Beam Angle 38°								
89460-MKS	MKS/CS/20W/38D/BK/27K	20W	1390+-	2700K	90-305	Phase & 0-10V	80	38°
89461-MKS	MKS/CS/20W/38D/BK/30K	20W	1390+-	3000K	90-305	Phase & 0-10V	80	38°
89462-MKS	MKS/CS/20W/38D/BK/35K	20W	1390+-	3500K	90-305	Phase & 0-10V	80	38°
89463-MKS	MKS/CS/20W/38D/BK/40K	20W	1390+-	4000K	90-305	Phase & 0-10V	80	38°

White Finish (Standard)

Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Beam °
Beam Angle 24°								
89475-MKS	MKS/CS/20W/24D/WH/27K	20W	1390+-	2700K	90-305	Phase & 0-10V	80	24°
89476-MKS	MKS/CS/20W/24D/WH/30K	20W	1390+-	3000K	90-305	Phase & 0-10V	80	24°
89477-MKS	MKS/CS/20W/24D/WH/35K	20W	1390+-	3500K	90-305	Phase & 0-10V	80	24°
89478-MKS	MKS/CS/20W/24D/WH/40K	20W	1390+-	4000K	90-305	Phase & 0-10V	80	24°
Beam Angle 38°								
89470-MKS	MKS/CS/20W/38D/WH/27K	20W	1390+-	2700K	90-305	Phase & 0-10V	80	38°
89471-MKS	MKS/CS/20W/38D/WH/30K	20W	1390+-	3000K	90-305	Phase & 0-10V	80	38°
89472-MKS	MKS/CS/20W/38D/WH/35K	20W	1390+-	3500K	90-305	Phase & 0-10V	80	38°
89473-MKS	MKS/CS/20W/38D/WH/40K	20W	1390+-	4000K	90-305	Phase & 0-10V	80	38°

Black Finish (Mini)

Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Beam °
Beam Angle 20°								
99465-MKS	MKS/MCS/15W/20D/BK/27K	15W	1100+-	2700K	90-305	Phase & 0-10V	80	20°
99466-MKS	MKS/MCS/15W/20D/BK/30K	15W	1100+-	3000K	90-305	Phase & 0-10V	80	20°
99467-MKS	MKS/MCS/15W/20D/BK/35K	15W	1100+-	3500K	90-305	Phase & 0-10V	80	20°
99468-MKS	MKS/MCS/15W/20D/BK/40K	15W	1100+-	4000K	90-305	Phase & 0-10V	80	20°
Beam Angle 40°								
99460-MKS	MKS/MCS/15W/40D/BK/27K	15W	1100+-	2700K	90-305	Phase & 0-10V	80	40°
99461-MKS	MKS/MCS/15W/40D/BK/30K	15W	1100+-	3000K	90-305	Phase & 0-10V	80	40°
99462-MKS	MKS/MCS/15W/40D/BK/35K	15W	1100+-	3500K	90-305	Phase & 0-10V	80	40°
99463-MKS	MKS/MCS/15W/40D/BK/40K	15W	1100+-	4000K	90-305	Phase & 0-10V	80	40°

Beam Angle 24° | 38°
Available in black and white finish




White Finish

Black Finish

Standard

Cree COB chip

32 Watts | 1900 Lumens

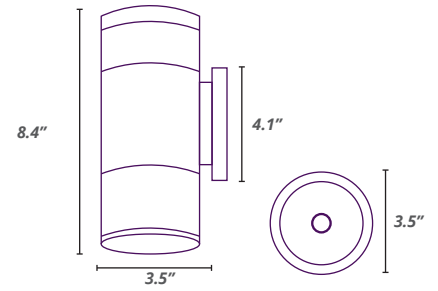

Features:

- A body made of die-cast aluminum allows passive cooling through heat dissipation
- Cree COB LED chip with 50,000 hours life span
- Black or white finishes
- Two-lights up/down wall mount fixture

Beam Angle 20° | 40°
Available in black and white finish




White Finish

Black Finish

Mini

Cree COB chip

20 Watts | 2160 Lumens

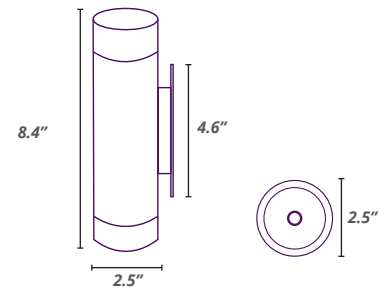

Features:

- A body made of die-cast aluminum allows passive cooling through heat dissipation
- Cree COB LED chip with 50,000 hours life span
- Black or white finishes
- Two-lights up/down wall mount fixture

Black Finish (Standard)

Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Beam °
Beam Angle 24°								
89465-MKS	MKS/CS/20W/24D/BK/27K	20W	1390+-	2700K	90-305	Phase & 0-10V	80	24°
89466-MKS	MKS/CS/20W/24D/BK/30K	20W	1390+-	3000K	90-305	Phase & 0-10V	80	24°
89467-MKS	MKS/CS/20W/24D/BK/35K	20W	1390+-	3500K	90-305	Phase & 0-10V	80	24°
89468-MKS	MKS/CS/20W/24D/BK/40K	20W	1390+-	4000K	90-305	Phase & 0-10V	80	24°
Beam Angle 38°								
89460-MKS	MKS/CS/20W/38D/BK/27K	20W	1390+-	2700K	90-305	Phase & 0-10V	80	38°
89461-MKS	MKS/CS/20W/38D/BK/30K	20W	1390+-	3000K	90-305	Phase & 0-10V	80	38°
89462-MKS	MKS/CS/20W/38D/BK/35K	20W	1390+-	3500K	90-305	Phase & 0-10V	80	38°
89463-MKS	MKS/CS/20W/38D/BK/40K	20W	1390+-	4000K	90-305	Phase & 0-10V	80	38°

White Finish (Standard)


Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Beam °
Beam Angle 24°								
89475-MKS	MKS/CS/20W/24D/WH/27K	20W	1390+-	2700K	90-305	Phase & 0-10V	80	24°
89476-MKS	MKS/CS/20W/24D/WH/30K	20W	1390+-	3000K	90-305	Phase & 0-10V	80	24°
89477-MKS	MKS/CS/20W/24D/WH/35K	20W	1390+-	3500K	90-305	Phase & 0-10V	80	24°
89478-MKS	MKS/CS/20W/24D/WH/40K	20W	1390+-	4000K	90-305	Phase & 0-10V	80	24°
Beam Angle 38°								
89470-MKS	MKS/CS/20W/38D/WH/27K	20W	1390+-	2700K	90-305	Phase & 0-10V	80	38°
89471-MKS	MKS/CS/20W/38D/WH/30K	20W	1390+-	3000K	90-305	Phase & 0-10V	80	38°
89472-MKS	MKS/CS/20W/38D/WH/35K	20W	1390+-	3500K	90-305	Phase & 0-10V	80	38°
89473-MKS	MKS/CS/20W/38D/WH/40K	20W	1390+-	4000K	90-305	Phase & 0-10V	80	38°

Black Finish (Standard)

Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Beam °
Beam Angle 24°								
89465-MKS	MKS/CS/20W/24D/BK/27K	20W	1390+-	2700K	90-305	Phase & 0-10V	80	24°
89466-MKS	MKS/CS/20W/24D/BK/30K	20W	1390+-	3000K	90-305	Phase & 0-10V	80	24°
89467-MKS	MKS/CS/20W/24D/BK/35K	20W	1390+-	3500K	90-305	Phase & 0-10V	80	24°
89468-MKS	MKS/CS/20W/24D/BK/40K	20W	1390+-	4000K	90-305	Phase & 0-10V	80	24°
Beam Angle 38°								
89460-MKS	MKS/CS/20W/38D/BK/27K	20W	1390+-	2700K	90-305	Phase & 0-10V	80	38°
89461-MKS	MKS/CS/20W/38D/BK/30K	20W	1390+-	3000K	90-305	Phase & 0-10V	80	38°
89462-MKS	MKS/CS/20W/38D/BK/35K	20W	1390+-	3500K	90-305	Phase & 0-10V	80	38°
89463-MKS	MKS/CS/20W/38D/BK/40K	20W	1390+-	4000K	90-305	Phase & 0-10V	80	38°

White Finish (Standard)

Item#	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI	Beam °
Beam Angle 24°								
89475-MKS	MKS/CS/20W/24D/WH/27K	20W	1390+-	2700K	90-305	Phase & 0-10V	80	24°
89476-MKS	MKS/CS/20W/24D/WH/30K	20W	1390+-	3000K	90-305	Phase & 0-10V	80	24°
89477-MKS	MKS/CS/20W/24D/WH/35K	20W	1390+-	3500K	90-305	Phase & 0-10V	80	24°
89478-MKS	MKS/CS/20W/24D/WH/40K	20W	1390+-	4000K	90-305	Phase & 0-10V	80	24°
Beam Angle 38°								
89470-MKS	MKS/CS/20W/38D/WH/27K	20W	1390+-	2700K	90-305	Phase & 0-10V	80	38°
89471-MKS	MKS/CS/20W/38D/WH/30K	20W	1390+-	3000K	90-305	Phase & 0-10V	80	38°
89472-MKS	MKS/CS/20W/38D/WH/35K	20W	1390+-	3500K	90-305	Phase & 0-10V	80	38°
89473-MKS	MKS/CS/20W/38D/WH/40K	20W	1390+-	4000K	90-305	Phase & 0-10V	80	38°

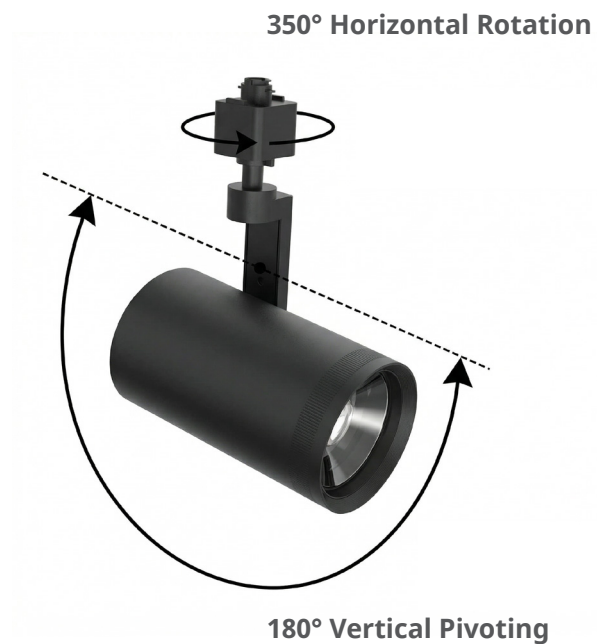



Features:

- A body made of die-cast aluminum allows passive cooling through heat dissipation
- Two-axis gimble to rotate 350° and tilt 180°
- 90+ CRI
- Black and white finishes available
- Multiple beam spread options

Black	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI
82213-MKS	MKS/TRX/HA/MW/20-50D/BK/95S	10/15/20	900/1350/1800	27K/30K/35K/40K/50K	120	Phase	90
82214-MKS	MKS/TRX/HA/HMW/20-50D/BK/95S	20/25/30	1800/2250/2700	27K/30K/35K/40K/50K	120	Phase	90
White							
82215-MKS	MKS/TRX/HA/MW/20-50D/WH/95S	10/15/20	900/1350/1800	27K/30K/35K/40K/50K	120	Phase	90
82216-MKS	MKS/TRX/HA/HMW/20-50D/WH/95S	20/25/30	1800/2250/2700	27K/30K/35K/40K/50K	120	Phase	90



Track lights


3.5" Track Light Head

Beam Angle 15° | 24° | 38° | 60° | 90°
Available in black and white finish



Cree Chip

3.5" Dia | 2509 Lumens

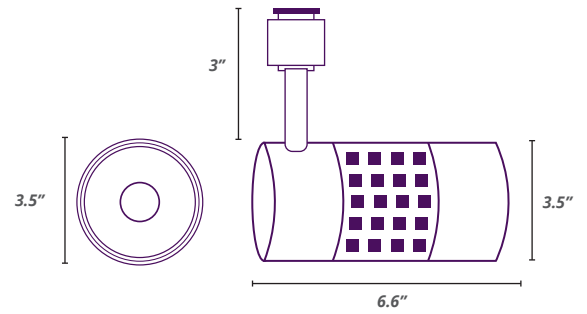


Beam Angle 15° | 24° | 38° | 60° | 90°
Available in black and white finish



Cree Chip

3.5" Dia | 3259 Lumens

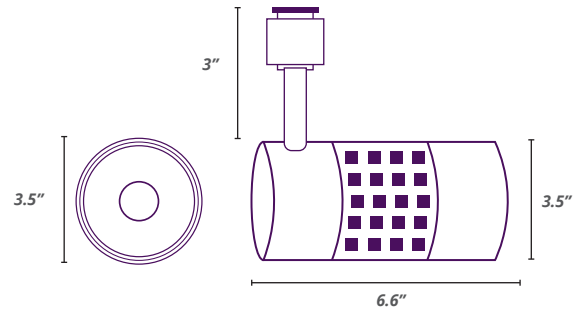





Features:

- A body made of die-cast aluminum allows passive cooling through heat dissipation
- CREE LED chip with 50,000 hours life span
- Two-axis gimble to rotate 350° and tilt 90°
- 90+ CRI
- Black and white finishes available
- Multiple beam spread options

Beam°	Black	White	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI
24°	89611-MKS	89601-MKS	MKS/TRX/HA/25W/24D/{BK WH}/27K	25W	2129+-	2700K	120	Phase	90
	89631-MKS	89621-MKS	MKS/TRX/HA/25W/24D/{BK WH}/30K	25W	2254+-	3000K	120	Phase	90
	89651-MKS	89641-MKS	MKS/TRX/HA/25W/24D/{BK WH}/40K	25W	2379+-	4000K	120	Phase	90
	89671-MKS	89661-MKS	MKS/TRX/HA/25W/24D/{BK WH}/50K	25W	2504+-	5000K	120	Phase	90
38°	89612-MKS	89602-MKS	MKS/TRX/HA/25W/38D/{BK WH}/27K	25W	2125+-	2700K	120	Phase	90
	89632-MKS	89622-MKS	MKS/TRX/HA/25W/38D/{BK WH}/30K	25W	2250+-	3000K	120	Phase	90
	89652-MKS	89642-MKS	MKS/TRX/HA/25W/38D/{BK WH}/40K	25W	2375+-	4000K	120	Phase	90
	89672-MKS	89662-MKS	MKS/TRX/HA/25W/38D/{BK WH}/50K	25W	2500+-	5000K	120	Phase	90
90°	89614-MKS	89604-MKS	MKS/TRX/HA/25W/90D/{BK WH}/27K	25W	2118+-	2700K	120	Phase	90
	89634-MKS	89624-MKS	MKS/TRX/HA/25W/90D/{BK WH}/30K	25W	2243+-	3000K	120	Phase	90
	89654-MKS	89644-MKS	MKS/TRX/HA/25W/90D/{BK WH}/40K	25W	2368+-	4000K	120	Phase	90
	89674-MKS	89664-MKS	MKS/TRX/HA/25W/90D/{BK WH}/50K	25W	2493+-	5000K	120	Phase	90

Beam°	Black	White	Description	Watt	Lumen	Color Temp	Volt	Dimming	CRI
24°	89711-MKS	89701-MKS	MKS/TRX/HA/36W/24D/{BK WH}/27K	36W	2754+-	2700K	120	Phase	90
	89731-MKS	89721-MKS	MKS/TRX/HA/36W/24D/{BK WH}/30K	36W	3004+-	3000K	120	Phase	90
	89751-MKS	89741-MKS	MKS/TRX/HA/36W/24D/{BK WH}/40K	36W	3154+-	4000K	120	Phase	90
	89771-MKS	89761-MKS	MKS/TRX/HA/36W/24D/{BK WH}/50K	36W	3254+-	5000K	120	Phase	90
38°	89712-MKS	89702-MKS	MKS/TRX/HA/36W/38D/{BK WH}/27K	36W	2750+-	2700K	120	Phase	90
	89732-MKS	89722-MKS	MKS/TRX/HA/36W/38D/{BK WH}/30K	36W	3000+-	3000K	120	Phase	90
	89752-MKS	89742-MKS	MKS/TRX/HA/36W/38D/{BK WH}/40K	36W	3150+-	4000K	120	Phase	90
	89772-MKS	89762-MKS	MKS/TRX/HA/36W/38D/{BK WH}/50K	36W	3250+-	5000K	120	Phase	90
90°	89714-MKS	89704-MKS	MKS/TRX/HA/36W/90D/{BK WH}/27K	36W	2743+-	2700K	120	Phase	90
	89734-MKS	89724-MKS	MKS/TRX/HA/36W/90D/{BK WH}/30K	36W	2993+-	3000K	120	Phase	90
	89754-MKS	89744-MKS	MKS/TRX/HA/36W/90D/{BK WH}/40K	36W	3143+-	4000K	120	Phase	90
	89774-MKS	89764-MKS	MKS/TRX/HA/36W/90D/{BK WH}/50K	36W	3243+-	5000K	120	Phase	90

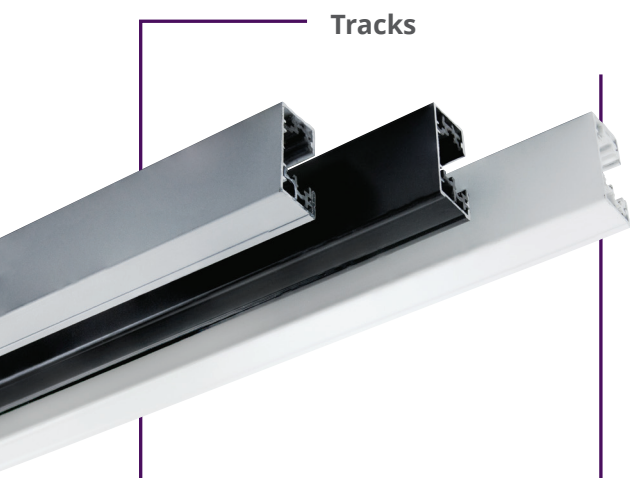

Black Finish Tracks

Item#	Description	Finish	Size
85001-MKS	MKS/TRXA/TR/2/BK	Black	2
85004-MKS	MKS/TRXA/TR/4/BK	Black	4
85007-MKS	MKS/TRXA/TR/6/BK	Black	6
85010-MKS	MKS/TRXA/TR/8/BK	Black	8

White Finish Tracks

Item#	Description	Finish	Size
85002-MKS	MKS/TRXA/TR/2/WH	White	2
85005-MKS	MKS/TRXA/TR/4/WH	White	4
85008-MKS	MKS/TRXA/TR/6/WH	White	6
85011-MKS	MKS/TRXA/TR/8/WH	White	8
85074-MKS	MKS/TRXA/TR/12/WH	White	12

Silver Finish Tracks

Item#	Description	Finish	Size
85003-MKS	MKS/TRXA/TR/2/SL	Silver	2
85006-MKS	MKS/TRXA/TR/4/SL	Silver	4
85009-MKS	MKS/TRXA/TR/6/SL	Silver	6
85012-MKS	MKS/TRXA/TR/8/SL	Silver	8
85079-MKS	MKS/TRXA/TR/12/SL	Silver	12



Monopoint

Plug-in a single track head (300W max)

Item#	Description	Color	Size
85065-MKS	MKS/TRXA/MP/BK	Black	4.6" x 4.6"
85066-MKS	MKS/TRXA/MP/WH	White	4.6" x 4.6"



Floating Canopy

Use to power anywhere along the track run.


Item#	Description	Color	Size
85060-MKS	MKS/TRXA/FC/WH	White	4.2" x 4.2"



Track Reinforcement Plate

Add support to suspended track.

Item#	Description	Color	Size
85044-MKS	MKS/TRXA/TP/BK	Black	-
85045-MKS	MKS/TRXA/TP/WH	White	-



Outlet Box Cover

Four inch cover plate for live end feed mounted on the junction box.

Item#	Description	Color	Size
85062-MKS	MKS/TRXA/OC/BK	Black	5" x 5"
85063-MKS	MKS/TRXA/OC/WH	White	5" x 5"

Track suspension kits



Live End Connector

Powers the start of a track run.

Item#	Description	Color	Size
85020-MKS	MKS/TRXA/LC/BK	Black	4.2" x 1.4"
85021-MKS	MKS/TRXA/LC/WH	White	4.2" x 1.4"
85030-MKS	MKS/TRXA/SC/WH	White	4.6" x 1.4"



End Cap Connector

Cap the end of a track section.

Item#	Description	Color	Size
85024-MKS	MKS/TRXA/EC/WH	White	1.4" x 0.6"
85032-MKS	MKS/TRXA/LC/BK	Black	4.2" x 4.2"



Straight Connector with Power Feed

Connects two track sections end-to-end.

Item#	Description	Color	Size
85026-MKS	MKS/TRXA/MJ/BK	Black	3.1" x 0.8"



"L" Connector with Power Feed

Connects two track sections into an "L" configuration. (right angle)

Item#	Description	Color	Size
85033-MKS	MKS/TRXA/LC/WH	White	4.2" x 4.2"
85035-MKS	MKS/TRXA/TC/BK	Black	7" x 4.2"



Mini Joiner

Low profile connector to join two straight tracks end-to-end.

Item#	Description	Color	Size
85027-MKS	MKS/TRXA/MJ/WH	White	3.1" x 0.8"
85041-MKS	MKS/TRXA/FC/BK	Black	8" x 1.4"



"T" Connector with Power Feed

Connects three track sections into a "T" configuration

Item#	Description	Color	Size
85036-MKS	MKS/TRXA/TC/WH	White	7" x 4.2"
85038-MKS	MKS/TRXA/XC/BK	Black	7" x 7"



Flexible Connector with Power Feed

Connects two track sections at any angle. (up to 90 degrees)

Item#	Description	Color	Size
85042-MKS	MKS/TRXA/FC/WH	White	8" x 1.4"
85023-MKS	MKS/TRXA/EC/BK	Black	1.4" x 0.6"



"X" Connector with Power Feed

Connects four track sections into an "X" configuration

Item#	Description	Color	Size
85039-MKS	MKS/TRXA/XC/WH	White	7" x 7"

