# **sunlite** INSTALLATION INSTRUCTIONS

85210-SU | LFX/EC/2'/20W/MV/D/40K | 2' LED STRIP LIGHT FIXTURE 85211-SU | LFX/EC/3'/25W/MV/D/40K | 3' LED STRIP LIGHT FIXTURE 85188-SU | LFX/EC/4'/26W/MV/D/40K | 4' LED STRIP LIGHT FIXTURE 85189-SU | LFX/EC/4'/41W/MV/D/40K | 4' LED STRIP LIGHT FIXTURE 85190-SU | LFX/EC/8'/80W/MV/D/40K | 8' LED STRIP LIGHT FIXTURE




Please read and understand this entire manual before attempting to assemble, operate or install the product.

**WARNING:** Avoid fire or electric shock. Follow installation instructions carefully. If unsure about electrical installation, consult, a qualified electrician. Wear rubber-soled shoes and work on a sturdy wooder ladder. Ground fixture to avoid potential electric shock. Handle metal parts carefully to prevent cuts. To avoid a hazard to children, account for all parts and destroy all packing material. This product is only suitable for indoor applications.

**CAUTION:** Turn off the power at fuse or circuit breaker box before installation and maintenance. NOTE: This fixture is suitable for 120-277-Volt fused circuits. Fixture must be installed according to National Electric Code and local building codes. If you are unsure about wiring, consult a qualified electrician. THIS FIXTURE BODY IS ONE PIECE, DO NOT DISASSEMBLE OR MAKE ALTERATIONS.


This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interence, and (2) this device must accept any interence received, including that may cause undesired operation.

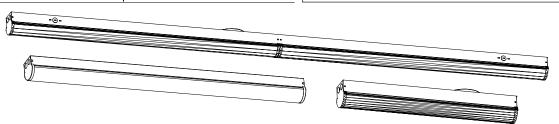






## DIMMABLE Compatible with most wall based 0, 10V dimming controllers

### **Installation** (Mounting hardware not included)

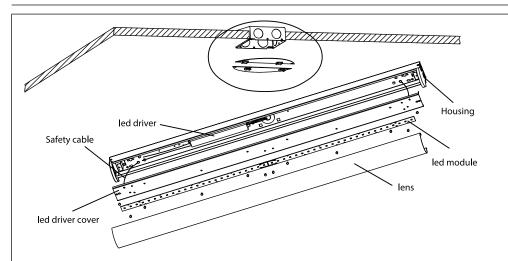



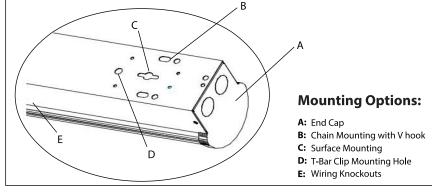



#### **Chain Mount (B)**

Attach V-Hooks (not included) to each end of the luminaire base and hang on ceiling.

#### Surface Mount (C)

Secure luminaire base to ceiling by inserting #8 anchor screws, toggle bolts or suitable fasteners (not included), depending on structural conditions, into key hole slots on the top side of the luminaire base.

#### T-Bar Clip Mount (D)

Attach T-Bar clips (not included) to the designated opening on the luminaire. Bring luminaire into T-Bar ceiling grid and secure luminaire to grid.